



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

SPECint®\_rate2006 = 1230

SPECint\_rate\_base2006 = 1060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Aug-2014  
Hardware Availability: Dec-2013  
Software Availability: Aug-2012

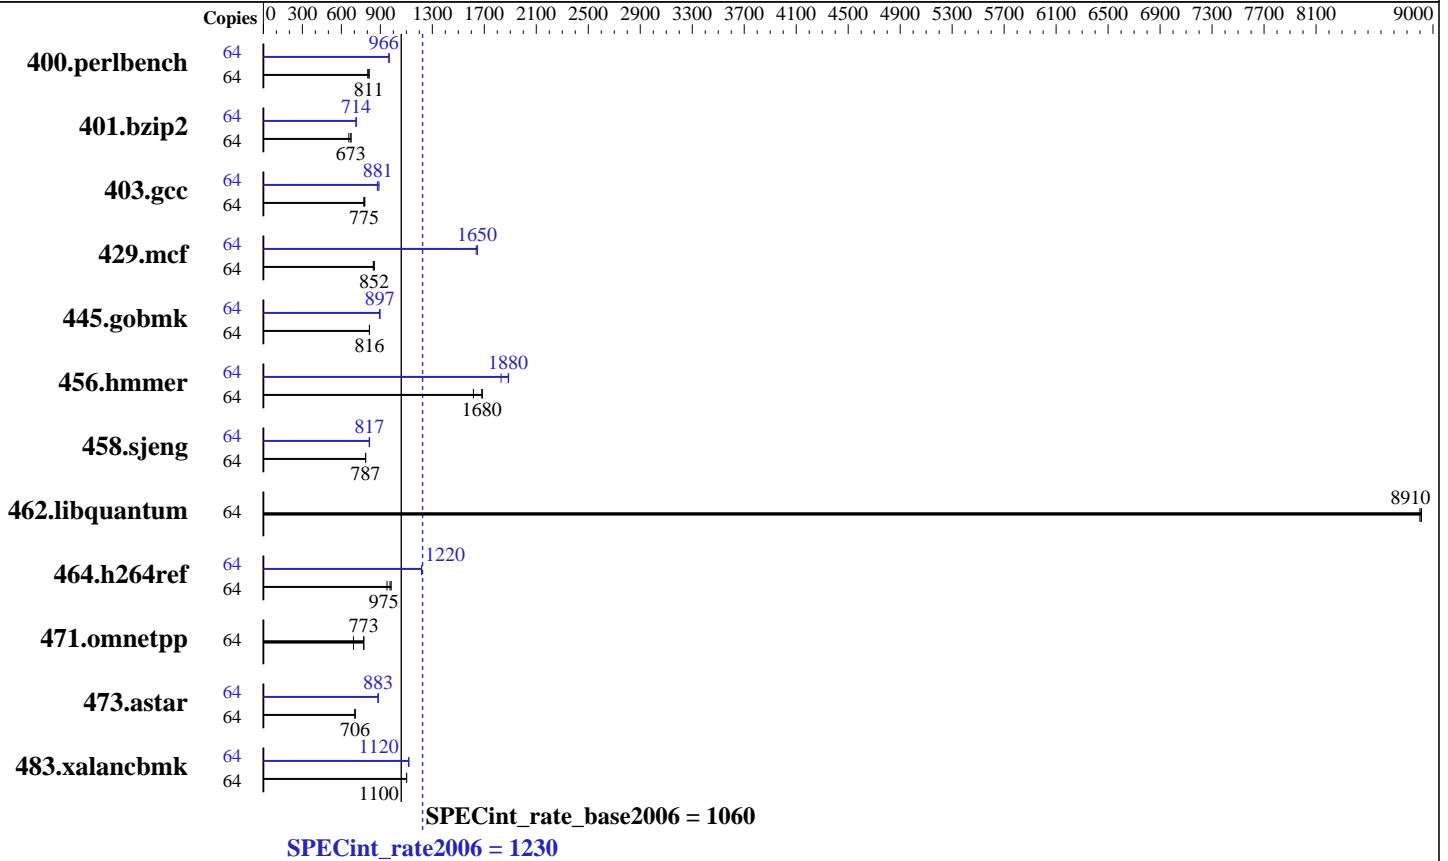

### Hardware

CPU Name: AMD Opteron 6386 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC,  
running at 1600 MHz)  
 Disk Subsystem: 1 x 600 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4  
(Santiago)  
2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
(from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

SPECint\_rate2006 = 1230

SPECint\_rate\_base2006 = 1060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Aug-2014  
Hardware Availability: Dec-2013  
Software Availability: Aug-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	779	803	768	814	<u>771</u>	<u>811</u>	64	646	968	647	966	<u>647</u>	<u>966</u>
401.bzip2	64	<u>918</u>	<u>673</u>	916	674	939	658	64	867	713	<u>864</u>	<u>714</u>	863	715
403.gcc	64	660	781	666	774	<u>664</u>	<u>775</u>	64	579	890	<u>585</u>	<u>881</u>	588	877
429.mcf	64	690	845	<u>685</u>	<u>852</u>	684	853	64	<u>355</u>	<u>1650</u>	355	1650	357	1640
445.gobmk	64	823	816	822	816	<u>823</u>	<u>816</u>	64	752	893	<u>749</u>	<u>897</u>	748	897
456.hammer	64	<u>355</u>	<u>1680</u>	370	1620	354	1690	64	<u>317</u>	<u>1880</u>	326	1830	316	1890
458.sjeng	64	985	786	984	787	<u>984</u>	<u>787</u>	64	<u>948</u>	<u>817</u>	951	814	947	817
462.libquantum	64	149	8900	<u>149</u>	<u>8910</u>	149	8910	64	149	8900	<u>149</u>	<u>8910</u>	149	8910
464.h264ref	64	<u>1453</u>	<u>975</u>	1489	951	1440	984	64	1165	1220	<u>1163</u>	<u>1220</u>	1163	1220
471.omnetpp	64	<u>518</u>	<u>773</u>	518	773	577	694	64	<u>518</u>	<u>773</u>	518	773	577	694
473.astar	64	638	705	<u>637</u>	<u>706</u>	636	706	64	509	883	<u>509</u>	<u>883</u>	509	883
483.xalancbmk	64	401	1100	401	1100	<u>401</u>	<u>1100</u>	64	395	1120	<u>395</u>	<u>1120</u>	395	1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=57344 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS setting:  
Operating Mode set to Performance  
Sysinfo program /home/SPECcpu-20120821-amd1206/Docs/sysinfo-rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ 5569a0425e2ad530534e4c79a46e4d28  
running on x3755M3 Sun Aug 10 19:46:45 2014

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint\_rate2006 = 1230

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

SPECint\_rate\_base2006 = 1060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Aug-2014  
Hardware Availability: Dec-2013  
Software Availability: Aug-2012

### Platform Notes (Continued)

```

model name : AMD Opteron(tm) Processor 6386 SE
  4 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 2048 KB

```

```

From /proc/meminfo
MemTotal:      529379112 kB
HugePages_Total:    57344
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux x3755M3 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 7 11:42

```

SPEC is set to: /home/SPECcpu-20120821-amd1206
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      546G 151G 368G 30% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. -[AYE167AUS-1.14]- 10/14/2013
Memory:
  32x 16 GB
  32x Samsung M393B2G70BH0- 16 GB 1866 MHz 2 rank

```

(End of data from sysinfo program)  
The sysinfo-rev6818 used in this submission has an issue parsing the dmidecode output with "Memory Device Mapped Address" lines. The additional "32x 16 GB" in the sysinfo section above are not actual memory DIMMs and can be ignored.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 1230**

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 11

**Test date:** Aug-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Aug-2012

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu-20120821-amd1206/amd1206-rate-libs-revA/32:/home/SPECcpu-20120821-amd1206/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:

-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:

opencc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 1230**

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 11

**Test date:** Aug-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Aug-2012

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
openCC

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 1230**

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 11

**Test date:** Aug-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

456.hmmcr: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:prefetch=2 -OPT:alias=disjoint  
-OPT:unroll\_times\_max=16 -OPT:unroll\_size=512  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -CG:cflow=0  
-CG:cmp\_peep=on -CG:pre\_local\_sched=off -HP:bdt=2m:heap=2m  
-CG:p2align=0 -CG:load\_exe=3 -CG:dsched=on -march=bdver1

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: basepeak = yes

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-AMD-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-AMD-A.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3755 M3  
(AMD Opteron 6386 SE, 2.80 GHz)

**SPECint\_rate2006 = 1230**

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 27 10:50:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 August 2014.