



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp<sup>®</sup>2006 = **116**

SPECfp\_base2006 = **112**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2013

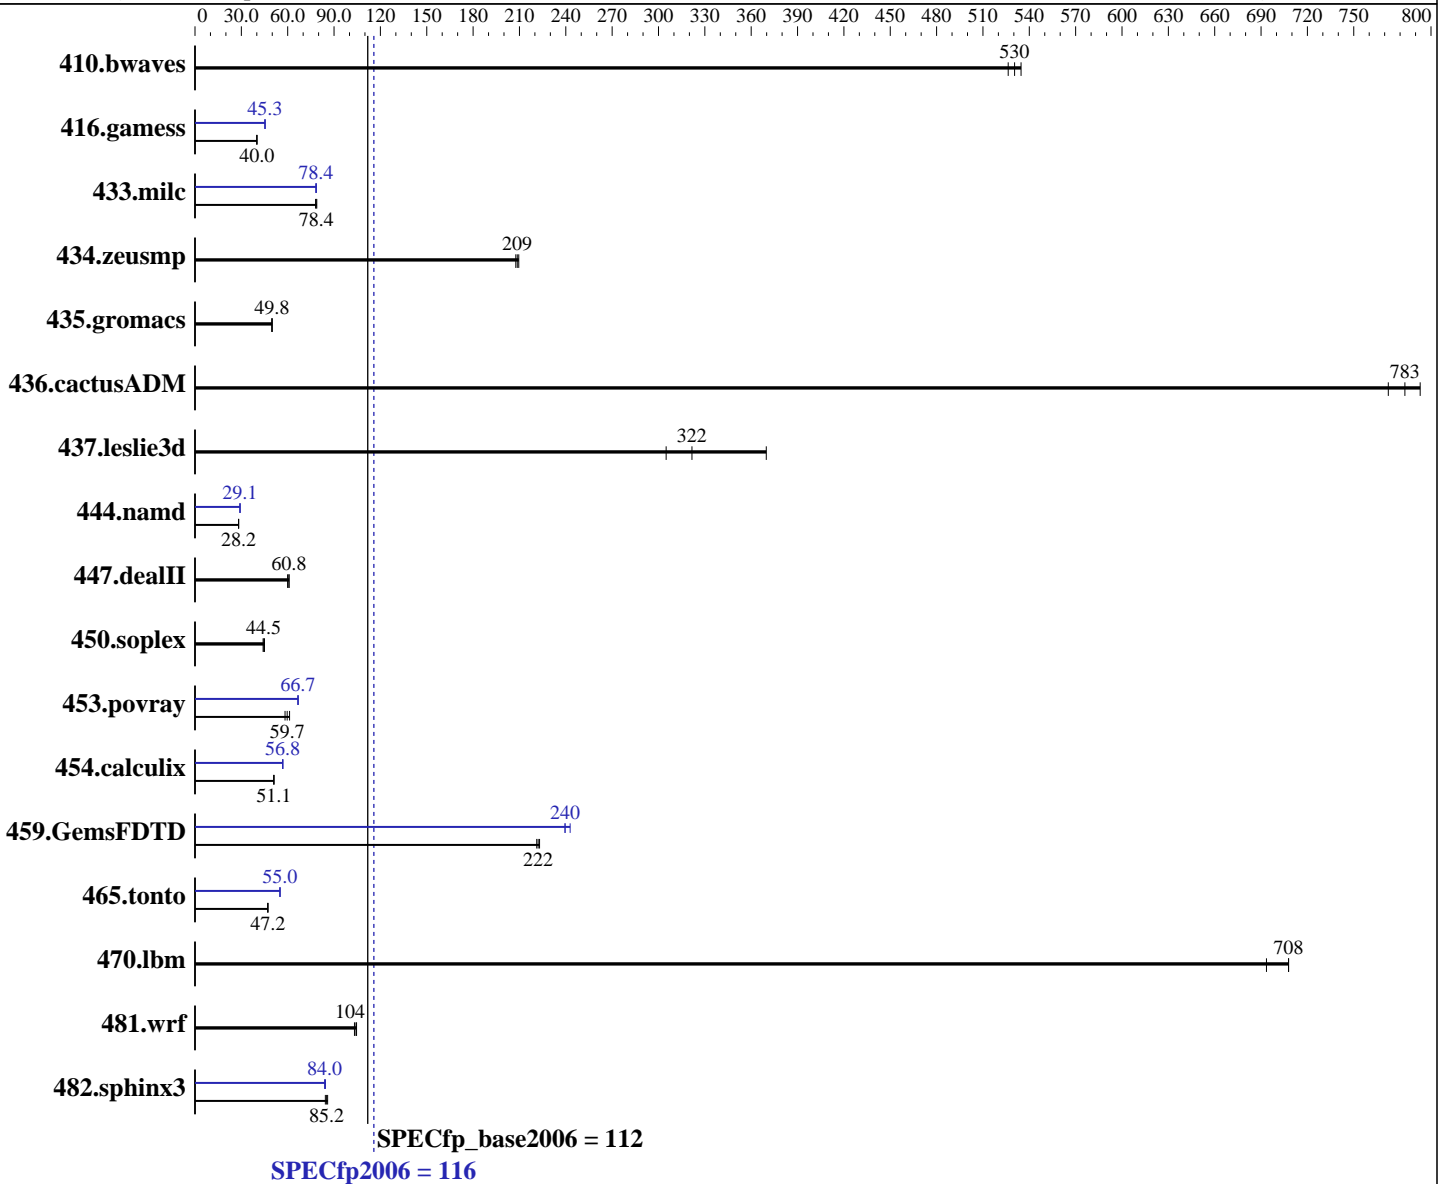

Hardware		Software	
CPU Name:	Intel Xeon E5-2667 v3	Operating System:	Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86_64
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
CPU MHz:	3200	Auto Parallel:	Yes
FPU:	Integrated	File System:	ext4
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		
Continued on next page		Continued on next page	



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp2006 = 116

SPECfp\_base2006 = 112

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>25.6</u>	<u>530</u>	25.4	535	25.8	526	<u>25.6</u>	<u>530</u>	25.4	535	25.8	526
416.gamess	488	40.1	<u>489</u>	<u>40.0</u>	489	40.0	433	45.3	431	45.4	<u>432</u>	<u>45.3</u>
433.milc	116	78.8	118	78.0	<u>117</u>	<u>78.4</u>	117	78.5	<u>117</u>	<u>78.4</u>	117	78.2
434.zeusmp	43.4	210	<u>43.6</u>	<u>209</u>	43.8	208	43.4	210	<u>43.6</u>	<u>209</u>	43.8	208
435.gromacs	143	50.0	<u>143</u>	<u>49.8</u>	144	49.8	143	50.0	<u>143</u>	<u>49.8</u>	144	49.8
436.cactusADM	<u>15.3</u>	<u>783</u>	15.1	793	15.5	772	<u>15.3</u>	<u>783</u>	15.1	793	15.5	772
437.leslie3d	25.4	370	<u>29.2</u>	<u>322</u>	30.8	305	25.4	370	<u>29.2</u>	<u>322</u>	30.8	305
444.namd	284	28.2	<u>284</u>	<u>28.2</u>	284	28.2	275	29.1	275	29.1	<u>275</u>	<u>29.1</u>
447.dealII	188	60.9	<u>188</u>	<u>60.8</u>	191	59.9	188	60.9	<u>188</u>	<u>60.8</u>	191	59.9
450.soplex	185	45.0	189	44.1	<u>187</u>	<u>44.5</u>	185	45.0	189	44.1	<u>187</u>	<u>44.5</u>
453.povray	86.9	61.2	91.3	58.3	<u>89.2</u>	<u>59.7</u>	<u>79.8</u>	<u>66.7</u>	79.7	66.8	79.9	66.6
454.calculix	161	51.1	<u>162</u>	<u>51.1</u>	162	51.0	145	56.8	<u>145</u>	<u>56.8</u>	145	56.8
459.GemsFDTD	48.0	221	<u>47.8</u>	<u>222</u>	47.6	223	44.3	240	43.7	243	<u>44.3</u>	<u>240</u>
465.tonto	<u>209</u>	<u>47.2</u>	208	47.2	209	47.1	179	55.0	179	55.0	<u>179</u>	<u>55.0</u>
470.lbm	<u>19.4</u>	<u>708</u>	19.4	708	19.8	694	<u>19.4</u>	<u>708</u>	19.4	708	19.8	694
481.wrf	107	105	108	103	<u>107</u>	<u>104</u>	107	105	108	103	<u>107</u>	<u>104</u>
482.sphinx3	227	85.8	<u>229</u>	<u>85.2</u>	231	84.4	231	84.4	232	84.0	<u>232</u>	<u>84.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings  
Enforce POR = Disable  
Memory Frequency = 2133  
Early Snoop = Disable  
COD Enable = Disable  
Hyper-Threading (ALL) = Disable  
This are only 16x 16GB samsung memory modules installed in the system  
Sysinfo program /root/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on 192-248.hnet Wed Nov 26 23:41:44 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp2006 = 116

SPECfp\_base2006 = 112

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 8
  siblings       : 8
  physical 0:    : cores 0 1 2 3 4 5 6 7
  physical 1:    : cores 0 1 2 3 4 5 6 7
cache size      : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264428936 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux 192-248.hnet 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 25 12:03

```

SPEC is set to: /root/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  673G  138G  501G  22% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0 09/09/2014
Memory:
 16x  16 GB
 16x Samsung(data:14/16) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp2006 = 116

SPECfp\_base2006 = 112

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp2006 = 116

SPECfp\_base2006 = 112

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2014  
Hardware Availability: Nov-2014  
Software Availability: Nov-2013

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

SPECfp2006 = 116

SPECfp\_base2006 = 112

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revF.20141203.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7048R-C1RT  
(X10DRH-CT , Intel Xeon E5-2667 v3)

**SPECfp2006 = 116**

**SPECfp\_base2006 = 112**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2014

**Hardware Availability:** Nov-2014

**Software Availability:** Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revF.20141203.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 30 16:10:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 December 2014.