



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc ORION HF620-G3

SPECint®_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531


Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

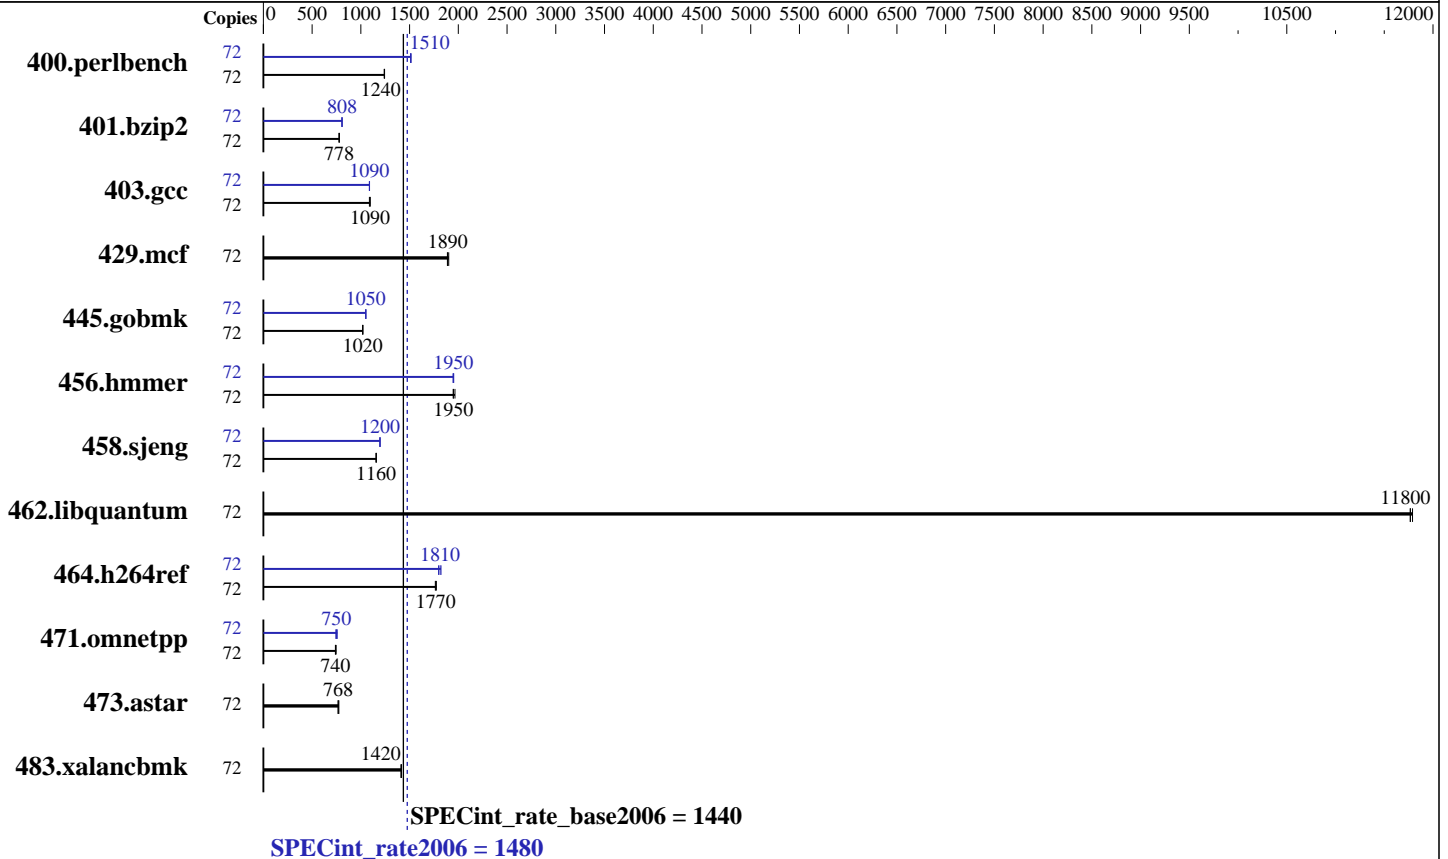

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology disabled
 CPU MHz: 2392
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1x 500 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
ORION HF620-G3

SPECint_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	566	1240	567	1240	566	1240	72	464	1520	465	1510	466	1510
401.bzip2	72	894	777	892	779	893	778	72	863	805	860	808	860	808
403.gcc	72	529	1100	533	1090	530	1090	72	533	1090	532	1090	532	1090
429.mcf	72	348	1890	345	1900	347	1890	72	348	1890	345	1900	347	1890
445.gobmk	72	741	1020	741	1020	741	1020	72	718	1050	718	1050	719	1050
456.hammer	72	342	1970	345	1950	345	1950	72	344	1950	345	1950	345	1950
458.sjeng	72	753	1160	753	1160	753	1160	72	729	1200	728	1200	728	1200
462.libquantum	72	127	11800	127	11800	127	11800	72	127	11800	127	11800	127	11800
464.h264ref	72	898	1770	901	1770	903	1760	72	874	1820	887	1800	879	1810
471.omnetpp	72	603	747	608	740	609	739	72	605	744	594	758	600	750
473.astar	72	658	768	653	774	659	767	72	658	768	653	774	659	767
483.xalancbmk	72	351	1420	352	1410	351	1420	72	351	1420	352	1410	351	1420

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Thu Apr 30 20:48:34 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
ORION HF620-G3

SPECint_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Platform Notes (Continued)

cache size : 23040 KB

From /proc/meminfo

MemTotal: 264498976 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 30 09:24

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	459G	137G	299G	32%	/

Additional information from dmidecode:

BIOS American Megatrends Inc. 0902 01/28/2015

Memory:

16x 16 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

General Notes

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB running at 2133 MHz 2 rank

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
ORION HF620-G3

SPECint_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
ORION HF620-G3

SPECint_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
429.mcf: basepeak = yes
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
ORION HF620-G3

SPECint_rate2006 = 1480

SPECint_rate_base2006 = 1440

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 17 10:47:42 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.