



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp®\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jun-2015

Hardware Availability: Jul-2015

Software Availability: Oct-2014

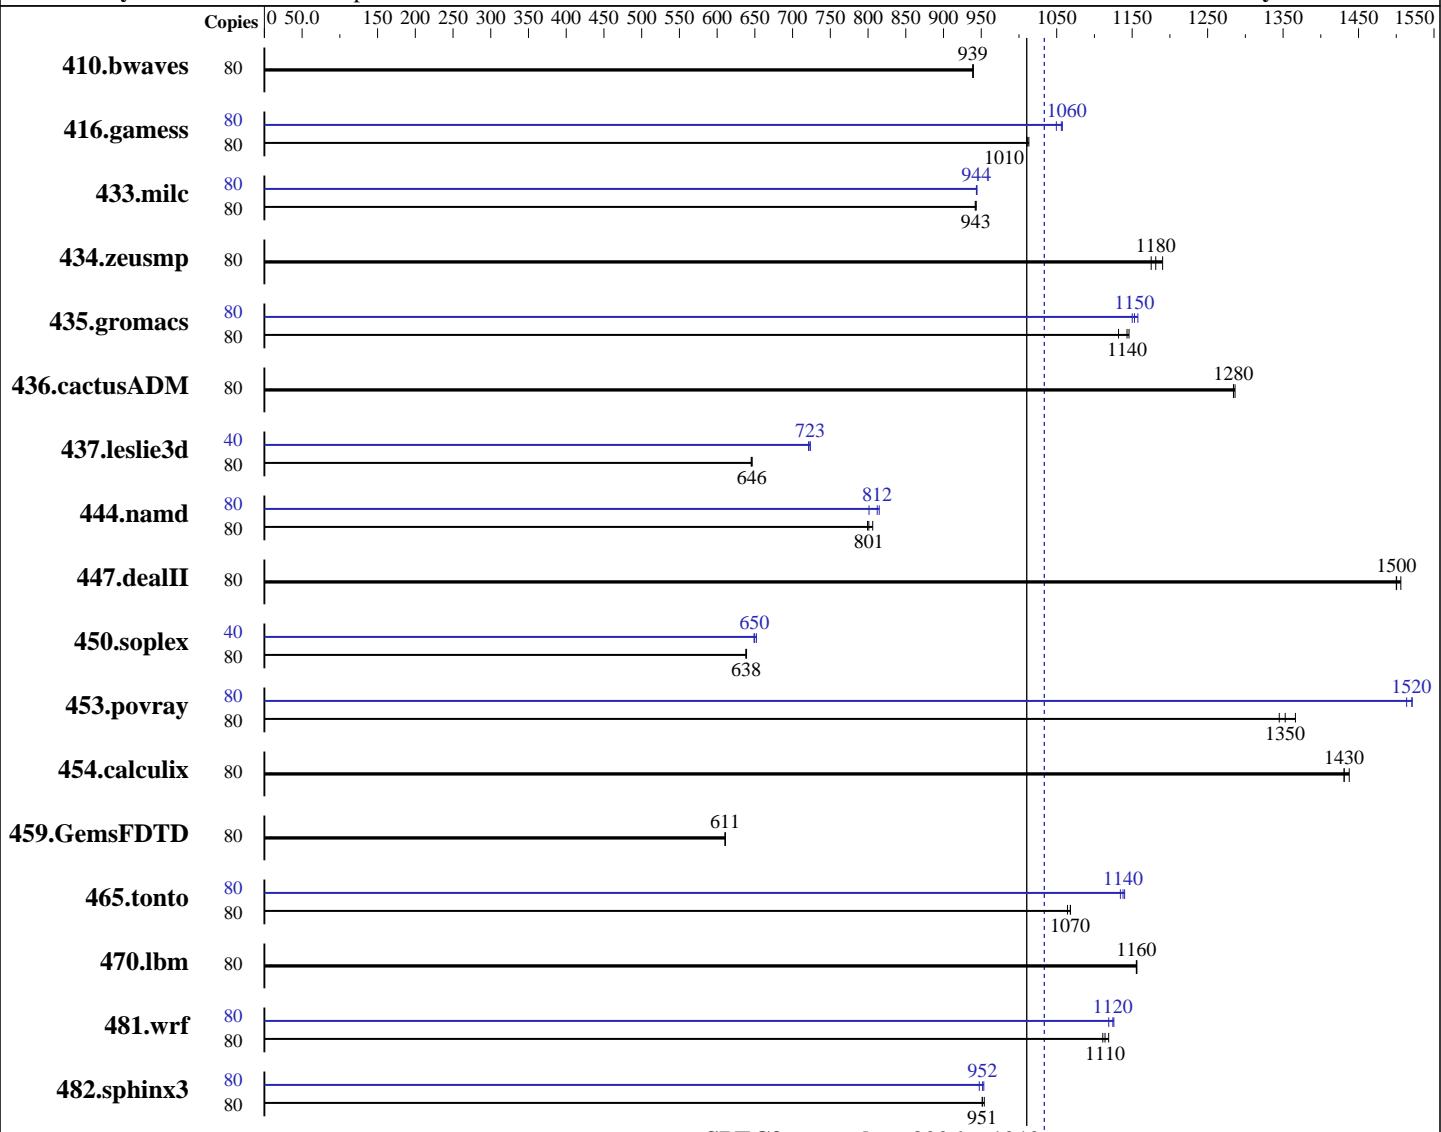

**SPECfp\_rate\_base2006 = 1010**

**SPECfp\_rate2006 = 1030**

### Hardware

CPU Name: Intel Xeon E7-4820 v3  
CPU Characteristics:  
CPU MHz: 1900  
FPU: Integrated  
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linus Enterprise Server 12 (x86\_64)  
3.12.28-4-default  
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran  
Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
Disk Subsystem: 1 x 400 GB SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1158	939	<u>1158</u>	<u>939</u>	1157	940	80	1158	939	<u>1158</u>	<u>939</u>	1157	940		
416.gamess	80	1546	1010	1550	1010	<u>1548</u>	<u>1010</u>	80	1481	1060	<u>1483</u>	<u>1060</u>	1492	1050		
433.milc	80	<u>779</u>	<u>943</u>	780	942	779	943	80	<u>778</u>	<u>944</u>	778	944	778	944		
434.zeusmp	80	619	1180	<u>616</u>	<u>1180</u>	612	1190	80	619	1180	<u>616</u>	<u>1180</u>	612	1190		
435.gromacs	80	499	1150	505	1130	<u>500</u>	<u>1140</u>	80	493	1160	<u>495</u>	<u>1150</u>	497	1150		
436.cactusADM	80	743	1290	744	1280	<u>744</u>	<u>1280</u>	80	743	1290	744	1280	<u>744</u>	<u>1280</u>		
437.leslie3d	80	<u>1164</u>	<u>646</u>	1163	646	1166	645	40	520	724	521	721	<u>520</u>	<u>723</u>		
444.namd	80	796	806	<u>801</u>	<u>801</u>	803	799	80	787	815	<u>790</u>	<u>812</u>	801	801		
447.dealII	80	<u>610</u>	<u>1500</u>	608	1510	610	1500	80	<u>610</u>	<u>1500</u>	608	1510	610	1500		
450.soplex	80	<u>1045</u>	<u>638</u>	1045	638	1044	639	40	512	652	<u>513</u>	<u>650</u>	514	649		
453.povray	80	311	1370	<u>315</u>	<u>1350</u>	316	1340	80	281	1510	<u>280</u>	<u>1520</u>	280	1520		
454.calculix	80	461	1430	<u>461</u>	<u>1430</u>	459	1440	80	461	1430	<u>461</u>	<u>1430</u>	459	1440		
459.GemsFDTD	80	1390	611	1390	611	<u>1390</u>	<u>611</u>	80	1390	611	1390	611	<u>1390</u>	<u>611</u>		
465.tonto	80	737	1070	740	1060	<u>737</u>	<u>1070</u>	80	691	1140	<u>692</u>	<u>1140</u>	694	1130		
470.lbm	80	<u>951</u>	<u>1160</u>	951	1160	951	1160	80	<u>951</u>	<u>1160</u>	951	1160	951	1160		
481.wrf	80	<u>802</u>	<u>1110</u>	799	1120	804	1110	80	794	1130	799	1120	<u>795</u>	<u>1120</u>		
482.sphinx3	80	<u>1639</u>	<u>951</u>	1639	951	1634	954	80	<u>1638</u>	<u>952</u>	1646	947	1635	953		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Platform Notes

Operating Mode set to Custom in BIOS

Cstates disabled in BIOS

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-w3yn Sat Jun 13 03:37:37 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-4820 v3 @ 1.90GHz
        4 "physical id"s (chips)
        80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
        physical 2: cores 0 1 2 3 4 8 9 10 11 12
        physical 3: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:      1058529820 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-w3yn 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Platform Notes (Continued)

(9879bd4) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 5 Jun 12 10:33

SPEC is set to: /home/cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda4 xfs 331G 276G 55G 84% /home  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[A9E121SUS-1.00]- 03/13/2015

Memory:

64x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
32x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jun-2015

**Hardware Availability:** Jul-2015

**Software Availability:** Oct-2014

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll12

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jun-2015

**Hardware Availability:** Jul-2015

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-4820 v3, 1.90 GHz)

**SPECfp\_rate2006 = 1030**

**SPECfp\_rate\_base2006 = 1010**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Aug 10 10:51:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 August 2015.