



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp®\_rate2006 = 134

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

### SPECfp\_rate\_base2006 = 131

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

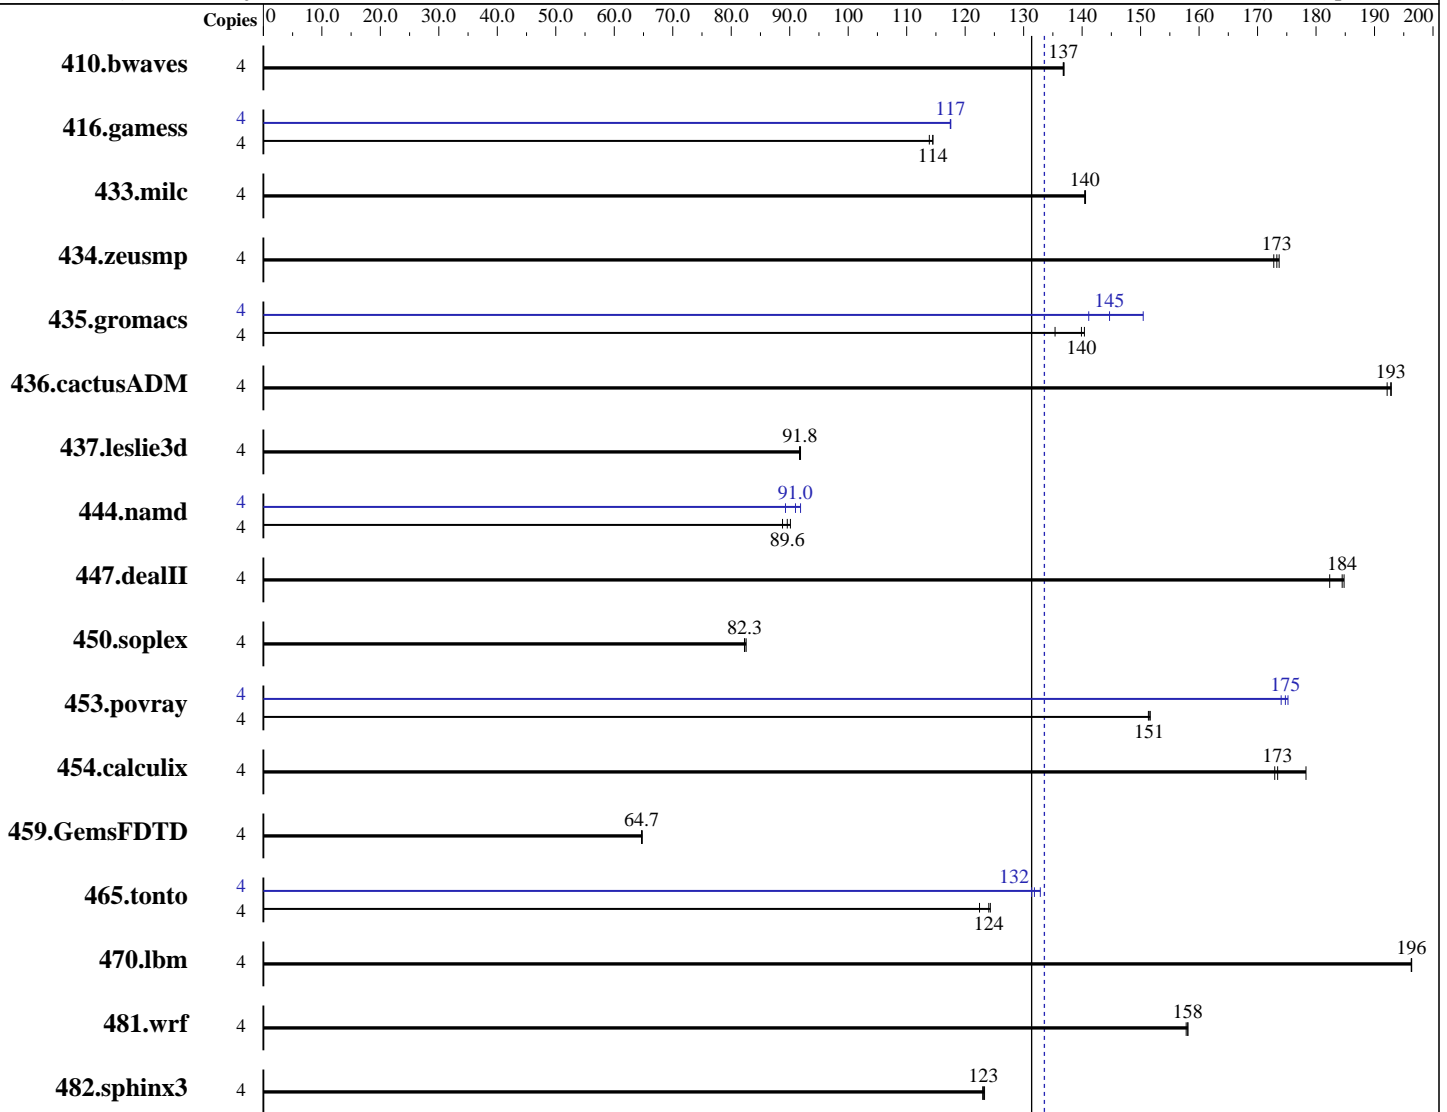

SPECfp\_rate\_base2006 = 131

SPECfp\_rate2006 = 134

### Hardware

CPU Name: Intel Core i3-6100  
 CPU Characteristics:  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
 Kernel 3.12.48-52.27-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 134

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

SPECfp\_rate\_base2006 = 131

CPU2006 license: 19

Test date: Nov-2015

Test sponsor: Fujitsu

Hardware Availability: Feb-2016

Tested by: Fujitsu

Software Availability: Sep-2015

L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<u>397</u>	<u>137</u>	397	137	397	137	4	<u>397</u>	<u>137</u>	397	137	397	137
416.gamess	4	684	114	<u>684</u>	<u>114</u>	688	114	4	<u>667</u>	<u>117</u>	666	118	667	117
433.milc	4	261	141	<u>261</u>	<u>140</u>	261	140	4	261	141	<u>261</u>	<u>140</u>	261	140
434.zeusmp	4	<u>210</u>	<u>173</u>	210	174	211	173	4	<u>210</u>	<u>173</u>	210	174	211	173
435.gromacs	4	203	140	211	135	<u>204</u>	<u>140</u>	4	190	150	202	141	<u>197</u>	<u>145</u>
436.cactusADM	4	<u>248</u>	<u>193</u>	248	193	249	192	4	<u>248</u>	<u>193</u>	248	193	249	192
437.leslie3d	4	<u>410</u>	<u>91.8</u>	409	91.9	410	91.7	4	<u>410</u>	<u>91.8</u>	409	91.9	410	91.7
444.namd	4	356	90.1	<u>358</u>	<u>89.6</u>	361	88.8	4	349	91.9	359	89.3	<u>353</u>	<u>91.0</u>
447.dealII	4	251	182	<u>248</u>	<u>184</u>	248	185	4	251	182	<u>248</u>	<u>184</u>	248	185
450.soplex	4	404	82.6	<u>405</u>	<u>82.3</u>	406	82.3	4	404	82.6	<u>405</u>	<u>82.3</u>	406	82.3
453.povray	4	140	152	141	151	<u>140</u>	<u>151</u>	4	121	175	<u>122</u>	<u>175</u>	122	174
454.calculix	4	<u>190</u>	<u>173</u>	191	173	185	178	4	<u>190</u>	<u>173</u>	191	173	185	178
459.GemsFDTD	4	<u>656</u>	<u>64.7</u>	655	64.8	656	64.7	4	<u>656</u>	<u>64.7</u>	655	64.8	656	64.7
465.tonto	4	317	124	321	122	<u>317</u>	<u>124</u>	4	<u>299</u>	<u>132</u>	296	133	300	131
470.lbm	4	280	196	<u>280</u>	<u>196</u>	280	196	4	280	196	<u>280</u>	<u>196</u>	280	196
481.wrf	4	283	158	283	158	<u>283</u>	<u>158</u>	4	283	158	283	158	<u>283</u>	<u>158</u>
482.sphinx3	4	632	123	634	123	<u>633</u>	<u>123</u>	4	632	123	634	123	<u>633</u>	<u>123</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 134**

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2015

**Hardware Availability:** Feb-2016

**Software Availability:** Sep-2015

## Platform Notes (Continued)

running on TX1330M2 Sat Nov 21 00:14:59 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Core(TM) i3-6100 CPU @ 3.70GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 4

physical 0: cores 0 1

cache size : 3072 KB

From /proc/meminfo

MemTotal: 65902560 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 0

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12"

VERSION\_ID="12"

PRETTY\_NAME="SUSE Linux Enterprise Server 12"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12"

uname -a:

Linux TX1330M2 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014

(9879bd4) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 5 Nov 20 16:43

SPEC is set to: /home/SPECcpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	237G	7.8G	229G	4%	/home

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 134**

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2015

**Hardware Availability:** Feb-2016

**Software Availability:** Sep-2015

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.1.0 for D3373-A1x  
10/30/2015

Memory:

4x SK Hynix HMA82GU7MFR8N-TF 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB  
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 134**

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 19

**Test date:** Nov-2015

**Test sponsor:** Fujitsu

**Hardware Availability:** Feb-2016

**Tested by:** Fujitsu

**Software Availability:** Sep-2015

## Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 134**

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2015

**Hardware Availability:** Feb-2016

**Software Availability:** Sep-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 134**

PRIMERGY TX1330 M2, Intel Core i3-6100, 3.70 GHz

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2015

**Hardware Availability:** Feb-2016

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 30 19:59:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 December 2015.