



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp®_rate2006 = 1660
SPECfp_rate_base2006 = 1610

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jul-2016

Hardware Availability: Jul-2016

Software Availability: Mar-2015

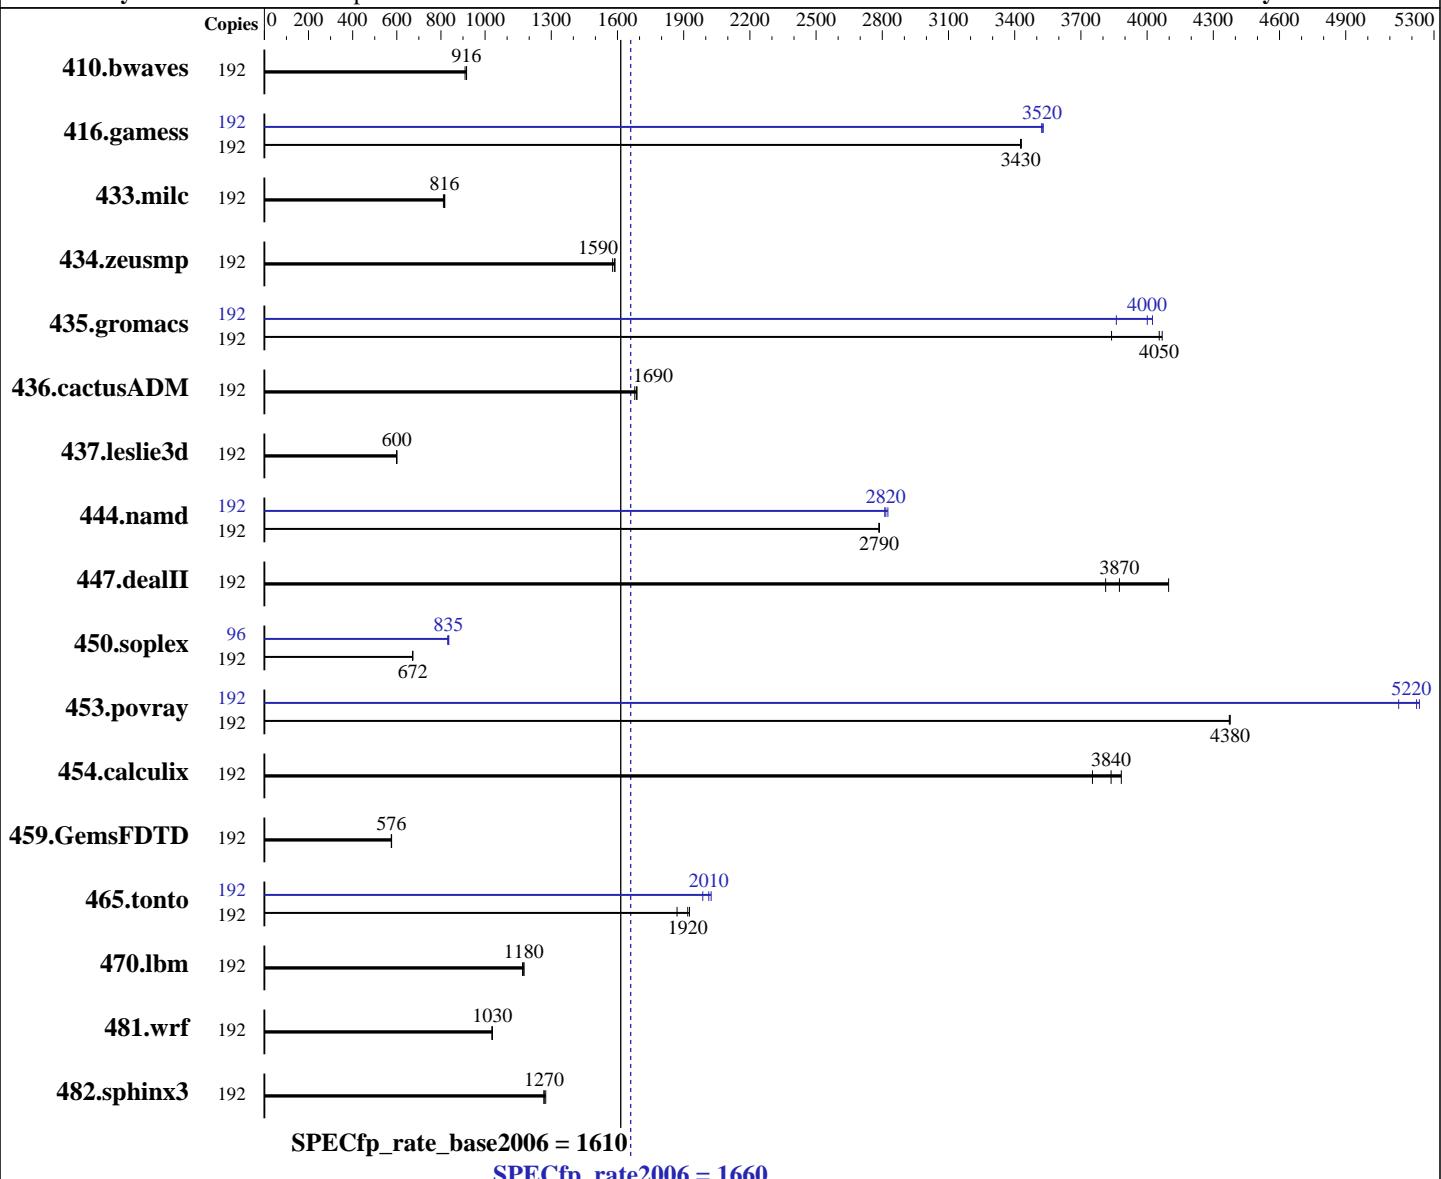

Hardware		Software	
CPU Name:	Intel Xeon E7-8890 v4	Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz	Compiler:	Kernel 3.12.49-11-default
CPU MHz:	2200		C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
FPU:	Integrated		Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
CPU(s) enabled:	96 cores, 4 chips, 24 cores/chip, 2 threads/core	Auto Parallel:	No
CPU(s) orderable:	2,4 chips	File System:	xfs
Primary Cache:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (multi-user)
Secondary Cache:	256 KB I+D on chip per core		Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	2848	916	<u>2848</u>	<u>916</u>	2869	909	192	2848	916	<u>2848</u>	<u>916</u>	2869	909		
416.gamess	192	1096	3430	<u>1097</u>	<u>3430</u>	1097	3430	192	1065	3530	1067	3520	<u>1067</u>	<u>3520</u>		
433.milc	192	<u>2159</u>	<u>816</u>	2156	817	2173	811	192	<u>2159</u>	<u>816</u>	2156	817	2173	811		
434.zeusmp	192	1100	1590	1107	1580	<u>1102</u>	<u>1590</u>	192	1100	1590	1107	1580	<u>1102</u>	<u>1590</u>		
435.gromacs	192	337	4070	357	3840	<u>338</u>	<u>4050</u>	192	<u>343</u>	<u>4000</u>	355	3860	341	4020		
436.cactusADM	192	<u>1361</u>	<u>1690</u>	1367	1680	1359	1690	192	<u>1361</u>	<u>1690</u>	1367	1680	1359	1690		
437.leslie3d	192	3008	600	3012	599	<u>3009</u>	<u>600</u>	192	3008	600	3012	599	<u>3009</u>	<u>600</u>		
444.namd	192	553	2780	<u>553</u>	<u>2790</u>	552	2790	192	545	2830	<u>547</u>	<u>2820</u>	548	2810		
447.dealII	192	<u>567</u>	<u>3870</u>	536	4100	576	3810	192	<u>567</u>	<u>3870</u>	536	4100	576	3810		
450.soplex	192	<u>2383</u>	<u>672</u>	2383	672	2382	672	96	<u>959</u>	<u>835</u>	959	835	964	831		
453.povray	192	<u>233</u>	<u>4380</u>	233	4380	234	4370	192	199	5140	<u>196</u>	<u>5220</u>	195	5230		
454.calculix	192	408	3880	422	3750	<u>413</u>	<u>3840</u>	192	408	3880	422	3750	<u>413</u>	<u>3840</u>		
459.GemsFDTD	192	3533	577	3540	575	<u>3539</u>	<u>576</u>	192	3533	577	3540	575	<u>3539</u>	<u>576</u>		
465.tonto	192	981	1930	1010	1870	<u>985</u>	<u>1920</u>	192	951	1990	933	2020	<u>938</u>	<u>2010</u>		
470.lbm	192	<u>2244</u>	<u>1180</u>	2255	1170	2243	1180	192	<u>2244</u>	<u>1180</u>	2255	1170	2243	1180		
481.wrf	192	2080	1030	2076	1030	<u>2076</u>	<u>1030</u>	192	2080	1030	2076	1030	<u>2076</u>	<u>1030</u>		
482.sphinx3	192	2935	1270	2955	1270	<u>2951</u>	<u>1270</u>	192	2935	1270	2955	1270	<u>2951</u>	<u>1270</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

Platform Notes

BIOS Configuration:

Operating Mode set to "Maximum Performance"
COD Preference set to Enabled
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on Draco-02 Sat Jul 9 09:18:20 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
 4 "physical id"s (chips)
 192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 24
 siblings : 48
 physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
 physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
 physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
 physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
cache size : 30720 KB

From /proc/meminfo
MemTotal: 529148996 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

Platform Notes (Continued)

```
uname -a:  
Linux Draco-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 8 17:57
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda4        xfs   688G  4.9G  683G  1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[A9E135CUS-3.10]- 06/16/2016

Memory:

16x Hynix HMA84GR7MFR4N-UH 32 GB 2 rank 2400 MHz, configured at 1600 MHz
80x NO DIMM Unknown

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3850 X6 Essential
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECfp_rate2006 = 1660

SPECfp_rate_base2006 = 1610

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:58:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.