



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp®\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

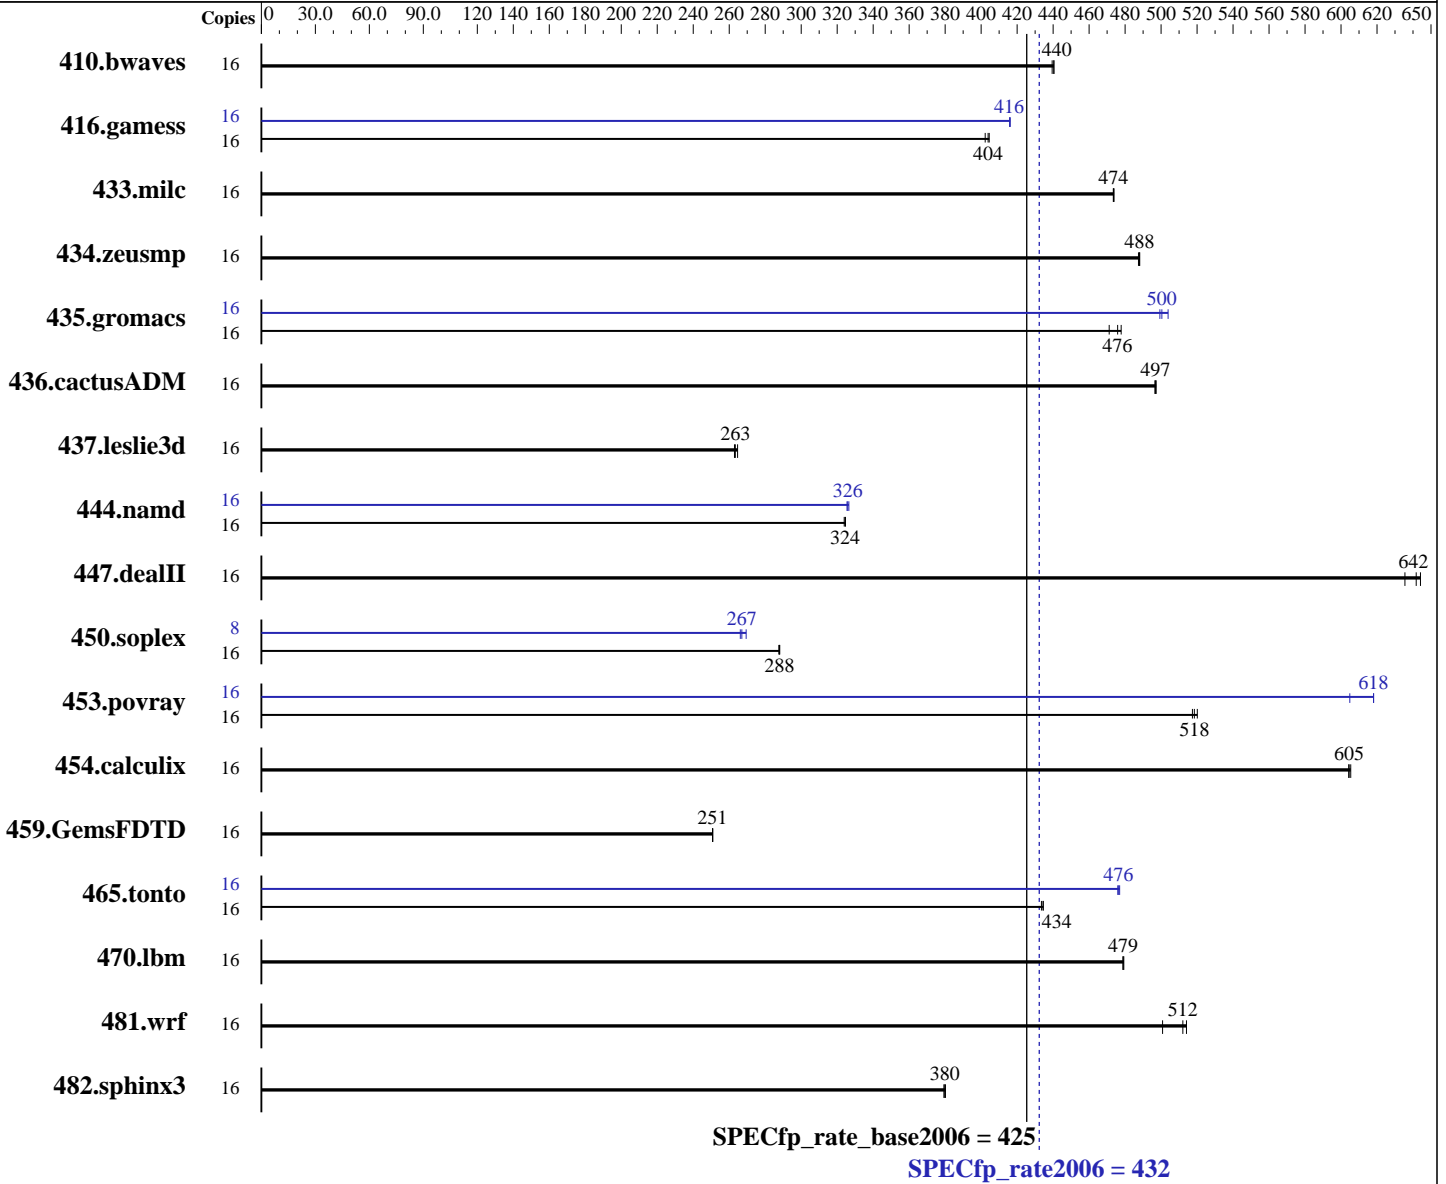

### Hardware

CPU Name: Intel Xeon E5-2637 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = **432**

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = **425**

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 2 x SATA, 300 GB, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>494</b>	<b>440</b>	495	439	494	440	16	<b>494</b>	<b>440</b>	495	439	494	440
416.gamess	16	<b>776</b>	<b>404</b>	774	404	779	402	16	753	416	753	416	<b>753</b>	<b>416</b>
433.milc	16	310	473	310	474	<b>310</b>	<b>474</b>	16	310	473	310	474	<b>310</b>	<b>474</b>
434.zeusmp	16	298	488	<b>298</b>	<b>488</b>	299	487	16	298	488	<b>298</b>	<b>488</b>	299	487
435.gromacs	16	239	478	<b>240</b>	<b>476</b>	242	471	16	229	499	227	504	<b>228</b>	<b>500</b>
436.cactusADM	16	385	497	384	497	<b>385</b>	<b>497</b>	16	385	497	384	497	<b>385</b>	<b>497</b>
437.leslie3d	16	568	265	572	263	<b>571</b>	<b>263</b>	16	568	265	572	263	<b>571</b>	<b>263</b>
444.namd	16	<b>396</b>	<b>324</b>	396	324	395	325	16	393	326	<b>394</b>	<b>326</b>	394	325
447.dealII	16	<b>285</b>	<b>642</b>	284	644	288	636	16	<b>285</b>	<b>642</b>	284	644	288	636
450.soplex	16	<b>463</b>	<b>288</b>	464	288	463	288	8	<b>250</b>	<b>267</b>	251	266	248	269
453.povray	16	<b>164</b>	<b>518</b>	164	520	165	517	16	138	618	<b>138</b>	<b>618</b>	141	605
454.calculix	16	218	605	218	604	<b>218</b>	<b>605</b>	16	218	605	218	604	<b>218</b>	<b>605</b>
459.GemsFDTD	16	677	251	<b>677</b>	<b>251</b>	677	251	16	677	251	<b>677</b>	<b>251</b>	677	251
465.tonto	16	<b>362</b>	<b>434</b>	362	435	363	433	16	330	477	331	476	<b>330</b>	<b>476</b>
470.lbm	16	459	479	459	479	<b>459</b>	<b>479</b>	16	459	479	459	479	<b>459</b>	<b>479</b>
481.wrf	16	357	501	<b>349</b>	<b>512</b>	348	514	16	357	501	<b>349</b>	<b>512</b>	348	514
482.sphinx3	16	<b>821</b>	<b>380</b>	822	379	820	380	16	<b>821</b>	<b>380</b>	822	379	820	380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /benchmarks/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on c1302 Sat Oct 8 17:15:40 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
 2 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal: 131925028 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux c1302 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 8 16:35

SPEC is set to: /benchmarks/cpu2006

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 544G 71G 446G 14% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Oct-2016  
Hardware Availability: May-2016  
Software Availability: Mar-2016

## Platform Notes (Continued)

BIOS American Megatrends Inc. 5.11 05/18/2016  
Memory:  
8x NO DIMM NO DIMM  
8x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/benchmarks/cpu2006/libs/32:/benchmarks/cpu2006/libs/64:/benchmarks/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

## Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 432

Sugon TC4600E (Intel Xeon E5-2637 v4)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2016

Hardware Availability: May-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 2 10:38:09 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 November 2016.