



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint®_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

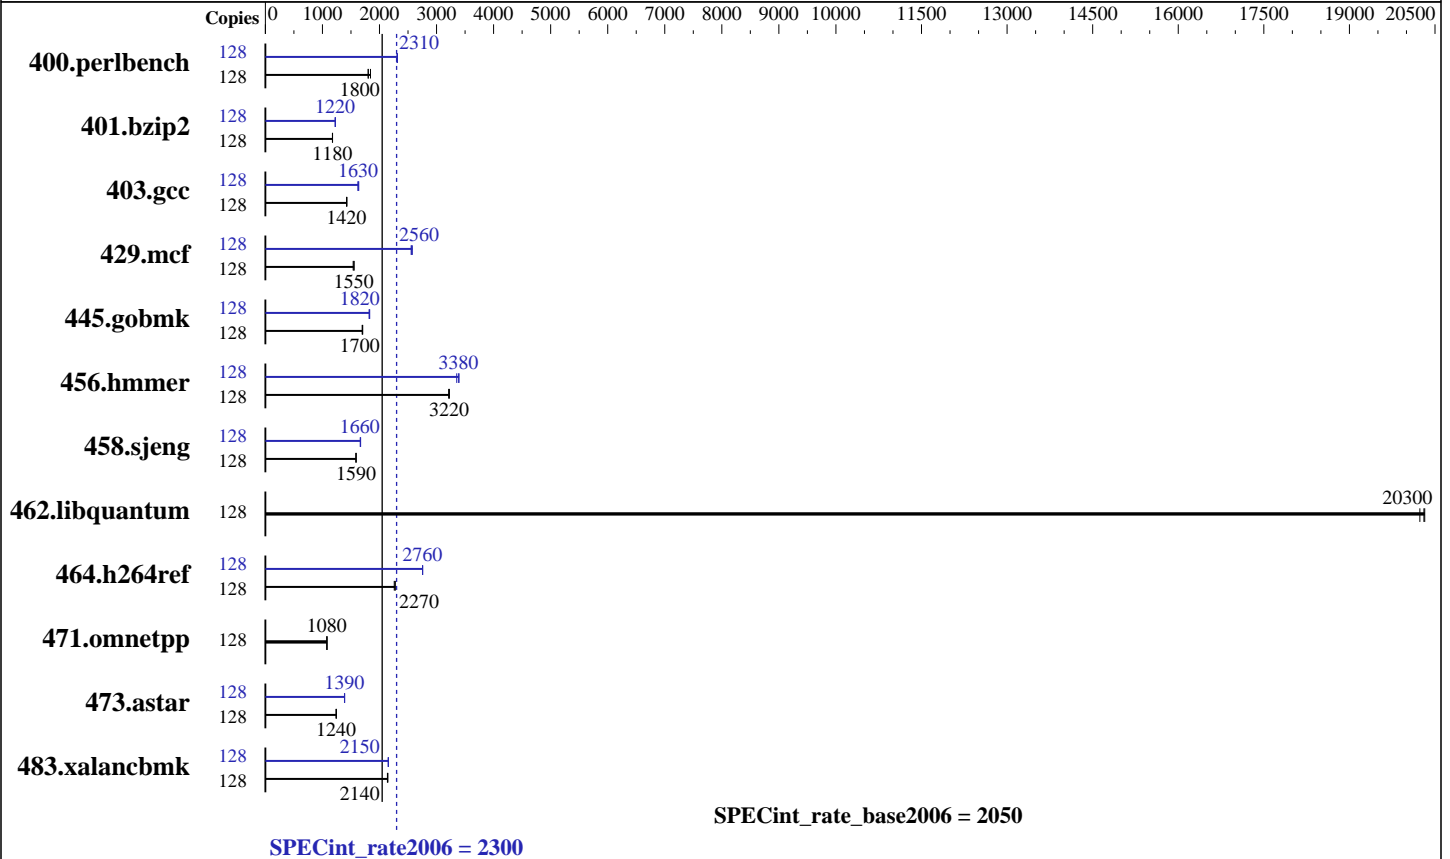

Hardware

CPU Name: AMD EPYC 7551
CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 64 cores, 2 chips, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 64 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2667V-R, running at 2400)
Disk Subsystem: 1 x 1 TB SSD
Other Hardware: None

Software

Operating System: Ubuntu 16.04.2 LTS,
Kernel 4.4.0-83-generic
Compiler: C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: No
File System: ext4
System State: Run level 3 (Full multiuser with network)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	679	1840	694	1800	<u>693</u>	<u>1800</u>	128	542	2310	<u>541</u>	<u>2310</u>	540	2320
401.bzip2	128	1049	1180	1051	1180	<u>1050</u>	<u>1180</u>	128	<u>1009</u>	<u>1220</u>	1007	1230	1009	1220
403.gcc	128	<u>723</u>	<u>1420</u>	721	1430	724	1420	128	<u>633</u>	<u>1630</u>	635	1620	630	1640
429.mcf	128	<u>752</u>	<u>1550</u>	751	1550	759	1540	128	<u>456</u>	<u>2560</u>	457	2550	453	2580
445.gobmk	128	787	1710	792	1700	<u>788</u>	<u>1700</u>	128	<u>737</u>	<u>1820</u>	738	1820	734	1830
456.hammer	128	<u>371</u>	<u>3220</u>	370	3220	372	3210	128	352	3390	<u>353</u>	<u>3380</u>	356	3350
458.sjeng	128	976	1590	974	1590	<u>975</u>	<u>1590</u>	128	931	1660	928	1670	<u>930</u>	<u>1660</u>
462.libquantum	128	131	20300	<u>131</u>	<u>20300</u>	131	20200	128	131	20300	<u>131</u>	<u>20300</u>	131	20200
464.h264ref	128	<u>1246</u>	<u>2270</u>	1245	2280	1254	2260	128	1028	2750	1028	2760	<u>1028</u>	<u>2760</u>
471.omnetpp	128	741	1080	<u>742</u>	<u>1080</u>	742	1080	128	741	1080	<u>742</u>	<u>1080</u>	742	1080
473.astar	128	725	1240	722	1240	<u>724</u>	<u>1240</u>	128	<u>647</u>	<u>1390</u>	647	1390	648	1390
483.xalancbmk	128	413	2140	<u>412</u>	<u>2140</u>	412	2150	128	<u>410</u>	<u>2150</u>	410	2150	409	2160

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=114688 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

The Linux run level was 3; sysinfo run-level is incorrect.
The dmidecode memory speed information is incorrect.



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/work/cpu2006/amd1603-rate-libs-revA/32:/root/work/cpu2006/amd1603-rate-libs-revA/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite, which is only available from AMD at

<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

Binaries were compiled on a system with 2x AMD Opteron 6378 chips + 128GB Memory using RHEL 6.3

Submitted_by: "Smith, Van" <Van.Smith@amd.com>

Submitted: Mon Aug 7 22:41:39 EDT 2017

Submission: cpu2006-20170807-48094.sub

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-mno-fma4 -GRA:aggr_loop_splitting=off
-GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4 -WB, -mno-tbm
-mno-xop

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

Peak Optimization Flags (Continued)

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1 -mno-fma4

456.hmmr: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1
-mno-fma4

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1 -mno-fma4

462.libquantum: basepeak = yes

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1
-mno-fma4

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1 -mno-fma4

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Advanced Micro Devices)

Asus RS700A-E9,
AMD EPYC 7551

SPECint_rate2006 = 2300

SPECint_rate_base2006 = 2050

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2016

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 5 18:23:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 August 2017.