



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

**SPECrate2017\_int\_base = 395**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

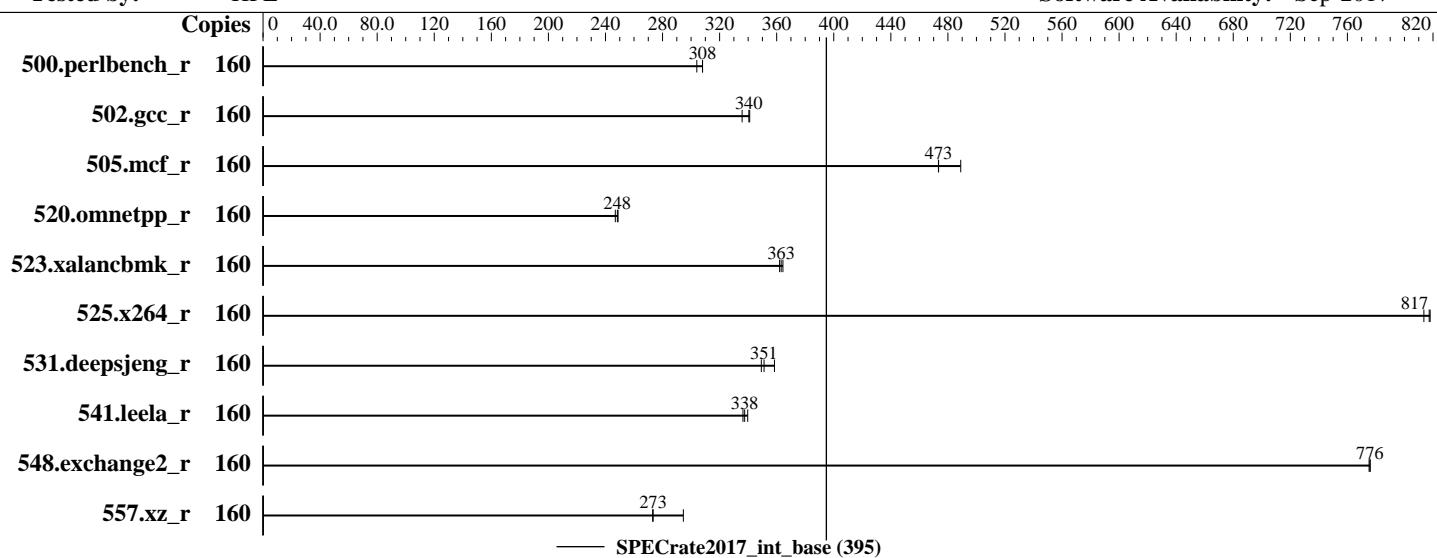

## Hardware

CPU Name: Intel Xeon Gold 6148  
 Max MHz.: 3700  
 Nominal: 2400  
 Enabled: 80 cores, 4 chips, 2 threads/core  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 2 x 480 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Compiler: Kernel 4.4.21-69-default  
 C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U34 released Oct-2017 (tested with U34 9/29/2017)  
 File System: xfs  
 System State: Run level 3 (mult-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library V5.0.1;  
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
 jemalloc: sources available via jemalloc.net



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

**SPECrate2017\_int\_base = 395**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	827	308	<b>827</b>	<b>308</b>	838	304									
502.gcc_r	160	675	336	664	341	<b>665</b>	<b>340</b>									
505.mcf_r	160	529	489	<b>546</b>	<b>473</b>	546	473									
520.omnetpp_r	160	850	247	<b>845</b>	<b>248</b>	844	249									
523.xalancbmk_r	160	464	364	<b>465</b>	<b>363</b>	467	362									
525.x264_r	160	<b>343</b>	<b>817</b>	344	814	342	818									
531.deepsjeng_r	160	512	358	<b>522</b>	<b>351</b>	525	349									
541.leela_r	160	<b>785</b>	<b>338</b>	788	336	780	340									
548.exchange2_r	160	541	775	<b>540</b>	<b>776</b>	540	776									
557.xz_r	160	587	295	<b>632</b>	<b>273</b>	633	273									

**SPECrate2017\_int\_base = 395**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (2.40 GHz, Intel Xeon Gold 6148)	<b>SPECrate2017_int_base = 395</b>
	<b>SPECrate2017_int_peak = Not Run</b>
CPU2017 License: 3	<b>Test Date:</b> Nov-2017
Test Sponsor: HPE	<b>Hardware Availability:</b> Oct-2017
Tested by: HPE	<b>Software Availability:</b> Sep-2017

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
 Memory Patrol Scrubbing set to Disabled  
 LLC Prefetch set to Enabled  
 LLC Dead Line Allocation set to Disabled  
 Stale A to S set to Enabled  
 Workload Profile set to General Throughput Compute  
 Minimum Processor Idle Power Core C-State set to C1E State  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-e6az Tue Nov 28 12:06:38 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
  4 "physical id"s (chips)
  160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	160
On-line CPU(s) list:	0-159
Thread(s) per core:	2
Core(s) per socket:	20
Socket(s):	4
NUMA node(s):	8
Vendor ID:	GenuineIntel
CPU family:	6
Model:	85
Model name:	Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
Stepping:	4
CPU MHz:	2394.380
BogoMIPS:	4788.76
Virtualization:	VT-x

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

**SPECrate2017\_int\_base = 395**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 3

**Test Date:** Nov-2017

Test Sponsor: HPE

**Hardware Availability:** Oct-2017

Tested by: HPE

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-9,80-89
NUMA node1 CPU(s): 10-19,90-99
NUMA node2 CPU(s): 20-29,100-109
NUMA node3 CPU(s): 30-39,110-119
NUMA node4 CPU(s): 40-49,120-129
NUMA node5 CPU(s): 50-59,130-139
NUMA node6 CPU(s): 60-69,140-149
NUMA node7 CPU(s): 70-79,150-159
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 80 81 82 83 84 85 86 87 88 89
node 0 size: 96346 MB
node 0 free: 95933 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 90 91 92 93 94 95 96 97 98 99
node 1 size: 96765 MB
node 1 free: 96397 MB
node 2 cpus: 20 21 22 23 24 25 26 27 28 29 100 101 102 103 104 105 106 107 108 109
node 2 size: 96765 MB
node 2 free: 96251 MB
node 3 cpus: 30 31 32 33 34 35 36 37 38 39 110 111 112 113 114 115 116 117 118 119
node 3 size: 96765 MB
node 3 free: 96503 MB
node 4 cpus: 40 41 42 43 44 45 46 47 48 49 120 121 122 123 124 125 126 127 128 129
node 4 size: 96765 MB
node 4 free: 96518 MB
node 5 cpus: 50 51 52 53 54 55 56 57 58 59 130 131 132 133 134 135 136 137 138 139
node 5 size: 96765 MB
node 5 free: 96518 MB
node 6 cpus: 60 61 62 63 64 65 66 67 68 69 140 141 142 143 144 145 146 147 148 149
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

SPECrate2017\_int\_base = 395

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 6 size: 96765 MB
node 6 free: 96518 MB
node 7 cpus: 70 71 72 73 74 75 76 77 78 79 150 151 152 153 154 155 156 157 158 159
node 7 size: 96763 MB
node 7 free: 96518 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 21 31 31 31 31 31 31
  1: 21 10 31 31 31 31 31 31
  2: 31 31 10 21 31 31 31 31
  3: 31 31 21 10 31 31 31 31
  4: 31 31 31 10 21 31 31 31
  5: 31 31 31 21 10 31 31 31
  6: 31 31 31 31 31 10 21 31
  7: 31 31 31 31 31 31 21 10
```

```
From /proc/meminfo
MemTotal:      792269980 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux linux-e6az 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
  x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 28 12:05
```

```
SPEC is set to: /home/cpu2017
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

SPECrate2017\_int\_base = 395

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	852G	84G	769G	10%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 09/29/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

FC 548.exchange2\_r(base)

=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

SPECrate2017\_int\_base = 395

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.40 GHz, Intel Xeon Gold 6148)

SPECrate2017\_int\_base = 395

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Other Flags (Continued)

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-28 13:06:38-0500.

Report generated on 2018-10-31 17:13:25 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.