



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

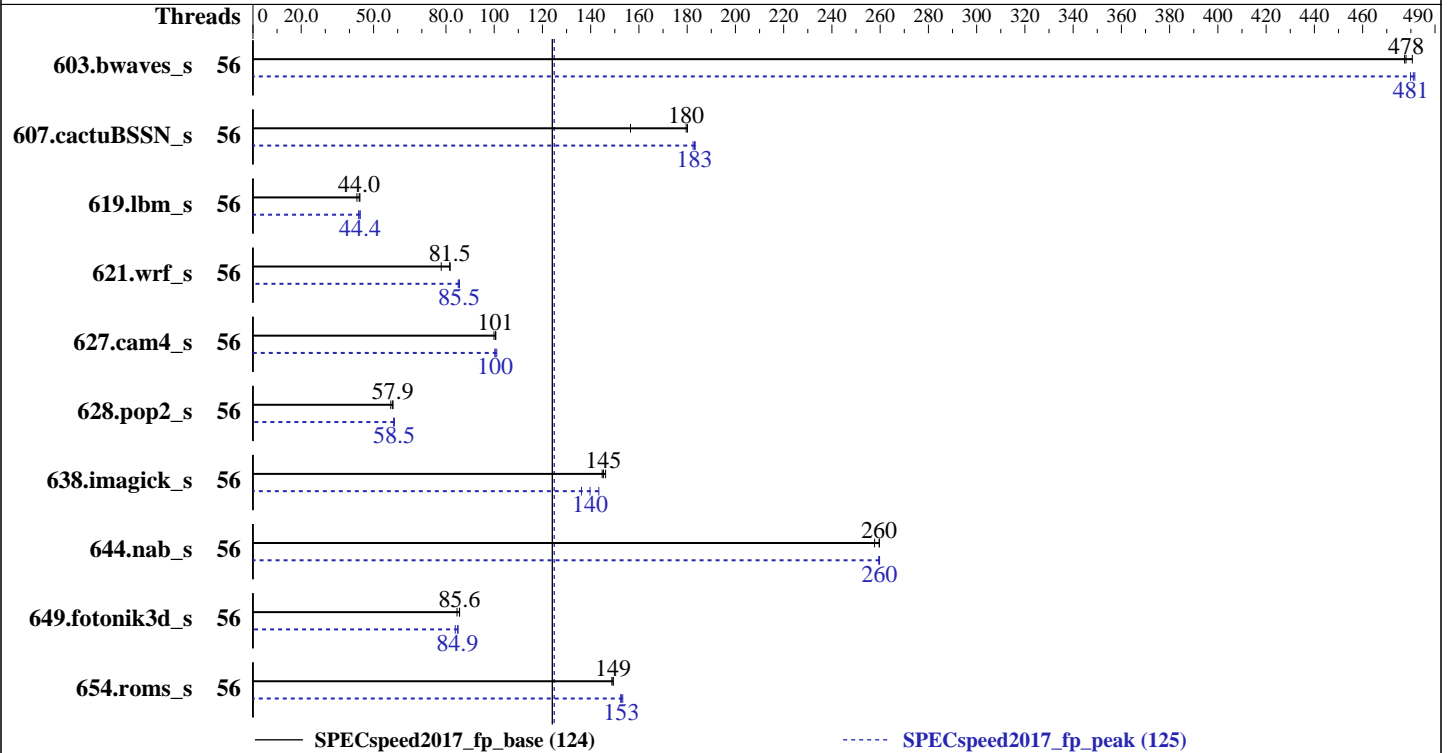

Hardware

CPU Name: Intel Xeon Platinum 8176
 Max MHz.: 3800
 Nominal: 2100
 Enabled: 56 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0601 released Oct-2017
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	124	477	<u>123</u>	<u>478</u>	123	481	56	123	480	122	482	<u>123</u>	<u>481</u>
607.cactuBSSN_s	56	107	157	<u>92.8</u>	<u>180</u>	92.5	180	56	90.9	183	91.4	182	<u>91.1</u>	<u>183</u>
619.lbm_s	56	122	43.1	118	44.3	<u>119</u>	<u>44.0</u>	56	120	43.8	<u>118</u>	<u>44.4</u>	118	44.4
621.wrf_s	56	169	78.1	<u>162</u>	<u>81.5</u>	162	81.7	56	155	85.6	155	85.1	<u>155</u>	<u>85.5</u>
627.cam4_s	56	88.7	99.9	<u>88.1</u>	<u>101</u>	88.0	101	56	88.4	100	87.7	101	<u>88.3</u>	<u>100</u>
628.pop2_s	56	<u>205</u>	<u>57.9</u>	208	57.2	205	58.0	56	204	58.3	<u>203</u>	<u>58.5</u>	203	58.6
638.imagick_s	56	99.7	145	<u>99.3</u>	<u>145</u>	98.7	146	56	<u>103</u>	<u>140</u>	101	143	106	136
644.nab_s	56	67.8	258	67.3	260	<u>67.3</u>	<u>260</u>	56	<u>67.3</u>	<u>260</u>	67.3	260	67.4	259
649.fotonik3d_s	56	<u>106</u>	<u>85.6</u>	106	85.7	108	84.6	56	107	85.0	<u>107</u>	<u>84.9</u>	109	83.9
654.roms_s	56	<u>105</u>	<u>149</u>	106	149	105	149	56	103	153	<u>103</u>	<u>153</u>	103	152

SPECspeed2017_fp_base = **124**

SPECspeed2017_fp_peak = **125**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pmm5 Fri Dec 22 15:23:34 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 56

On-line CPU(s) list: 0-55

Thread(s) per core: 1

Core(s) per socket: 28

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             2
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
Stepping:                  4
CPU MHz:                   2057.590
CPU max MHz:               3800.0000
CPU min MHz:               1000.0000
BogoMIPS:                  4200.00
Virtualization:            VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  39424K
NUMA node0 CPU(s):        0-27
NUMA node1 CPU(s):        28-55
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vnmi flexpriority ept vpid
fsrsgbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 385589 MB
node 0 free: 384511 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 387040 MB
node 1 free: 385923 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      791173296 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-pmm5 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 22 15:18

SPEC is set to: /spec2017

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        btrfs    203G   42G  160G  21% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
=====
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

=====
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECspeed2017_fp_base = 124

SPECspeed2017_fp_peak = 125

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-22 02:23:33-0500.

Report generated on 2018-10-31 16:29:14 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.