



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55


Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

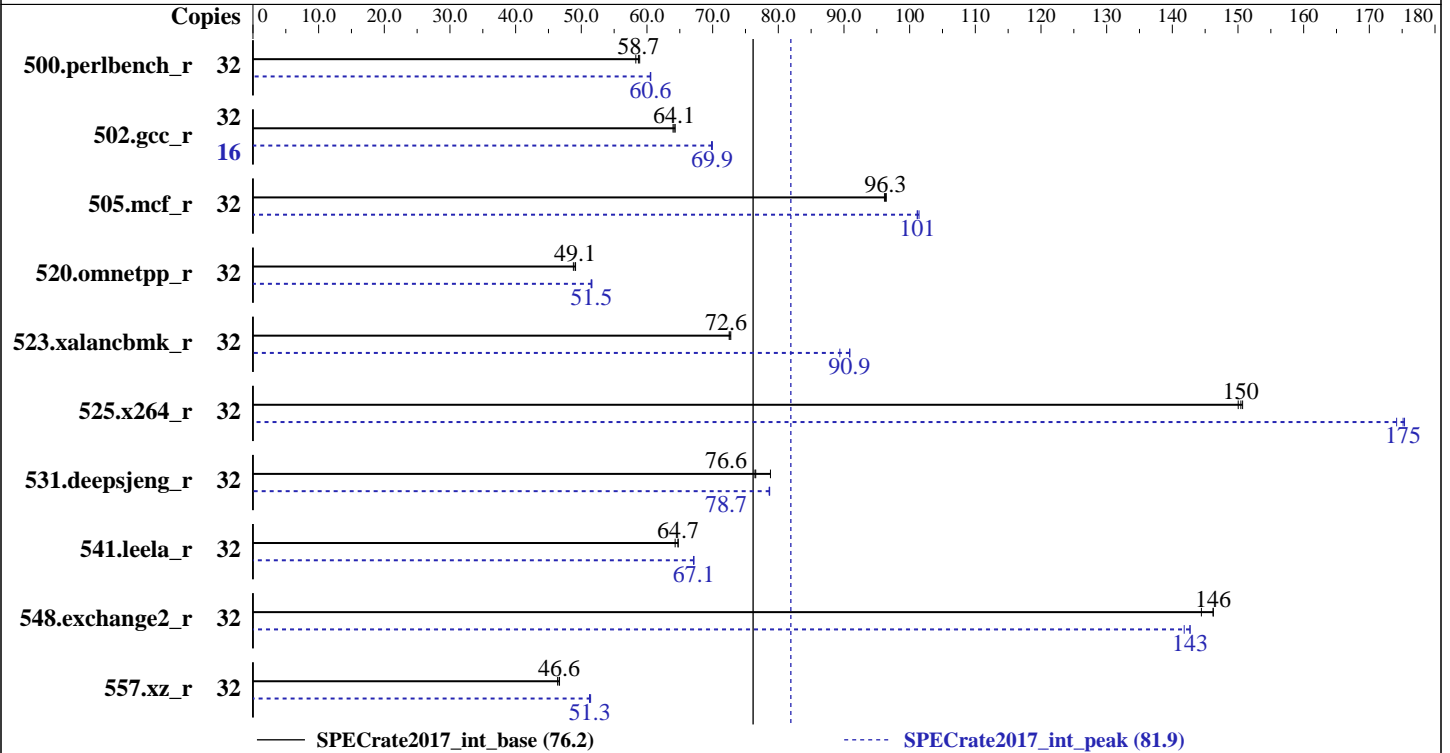

Hardware

CPU Name: AMD EPYC 7281
 Max MHz.: 2700
 Nominal: 2100
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 32 MB I+D on chip per chip, 4 MB shared / 2 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 4DRx4 PC4-2667V-L)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
 kernel 4.4.126-94.22-default
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: Version 1.6.4 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library
 V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2018
Hardware Availability: Dec-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	874	58.3	865	58.9	868	58.7	32	841	60.6	841	60.6	842	60.5
502.gcc_r	32	707	64.1	708	64.0	705	64.3	16	324	69.9	324	69.9	324	69.8
505.mcf_r	32	536	96.4	537	96.3	538	96.2	32	510	101	511	101	511	101
520.omnetpp_r	32	860	48.8	856	49.1	855	49.1	32	813	51.6	815	51.5	814	51.5
523.xalancbmk_r	32	466	72.5	465	72.6	464	72.8	32	378	89.4	372	90.9	372	90.9
525.x264_r	32	372	150	372	151	373	150	32	320	175	322	174	320	175
531.deepsjeng_r	32	479	76.6	480	76.4	465	78.8	32	467	78.6	466	78.7	466	78.7
541.leela_r	32	818	64.7	824	64.3	819	64.7	32	789	67.1	790	67.1	789	67.1
548.exchange2_r	32	581	144	573	146	573	146	32	588	143	591	142	588	143
557.xz_r	32	740	46.7	745	46.4	741	46.6	32	672	51.4	674	51.3	674	51.2

SPECrate2017_int_base = 76.2

SPECrate2017_int_peak = 81.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1704-rate-libs-revD/64:/home/cpu2017-1.0.5/amd1704-rate-libs-revD/32:"
MALLOCCONF = "lg_chunk:26"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

jemalloc uses environment variable MALLOCCONF with values narenas and lg_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,

lg_chunk:21 sets the default chunk size to 2^21 = 2MiB.

Platform Notes

BIOS settings:

Memory Interleaving set to Channel Interleaving

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States set to Autonomous

Memory Patrol Scrub disabled

Memory Refresh Rate set to 1x

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Platform Notes (Continued)

PCI ASPM L1 Link Power Management disabled
Determinism Slider set to Power Determinism
Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-fl85 Tue Nov 27 02:01:44 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7281 16-Core Processor
 1 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 23
Model: 1
Model name: AMD EPYC 7281 16-Core Processor
Stepping: 2
CPU MHz: 2096.013
BogoMIPS: 4192.02
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 64K
L2 cache: 512K
L3 cache: 4096K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Platform Notes (Continued)

```

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28
node 0 size: 128621 MB
node 0 free: 128466 MB
node 1 cpus: 1 5 9 13 17 21 25 29
node 1 size: 129018 MB
node 1 free: 128862 MB
node 2 cpus: 2 6 10 14 18 22 26 30
node 2 size: 129018 MB
node 2 free: 128858 MB
node 3 cpus: 3 7 11 15 19 23 27 31
node 3 size: 129017 MB
node 3 free: 128861 MB
node distances:
node  0  1  2  3
0:  10  16  16  16
1:  16  10  16  16
2:  16  16  10  16
3:  16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528052376 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Platform Notes (Continued)

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-fl85 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Nov 27 02:00 last=5

SPEC is set to: /home/cpu2017-1.0.5

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	1.8T	9.5G	1.8T	1%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.6.4 10/04/2018

Memory:

8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666

8x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 502.gcc_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017_04_26)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
 CXXC 523.xalancbmk_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
 AOCC.LLVM.4.0.0.B35.2017_04_26)
 Target: i386-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
 CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
 525.x264_r(base) 557.xz_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
 AOCC.LLVM.4.0.0.B35.2017_04_26)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
 peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
 AOCC.LLVM.4.0.0.B35.2017_04_26)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
 CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
 AOCC.LLVM.4.0.0.B35.2017_04_26)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Compiler Version Notes (Continued)

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang_gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madx -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop
-fplugin-arg-dragonegg-llvm-option=-enable-iv-split
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

```

```

502.gcc_r: -m32 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -ljemalloc

```

```

505.mcf_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```

520.omnetpp_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

523.xalancbmk_r: -m32 -flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1

-finline-aggressive -mllvm -unroll-threshold=100

-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: -flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop

-fprofile-instr-generate(pass 1)

-fprofile-instr-use(pass 2) -Ofast -march=znver1

-mllvm -unroll-count=8 -mllvm -unroll-threshold=100

-ljemalloc

Fortran benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops

-ffast-math -Ofast -fdefault-integer-8 -fplugin=dragonegg.so

-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop

-fplugin-arg-dragonegg-llvm-option=-enable-iv-split

-fplugin-arg-dragonegg-llvm-option=-merge-constant

-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000

-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc

-lgfortran -lamdlibm

Peak Other Flags

C benchmarks:

502 gcc_r: -L/root/work/lib/jemalloc/lib32

C++ benchmarks:

523.xalancbmk_r: -L/root/work/lib/jemalloc/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 76.2

PowerEdge R7415 (AMD EPYC 7281, 2.70GHz)

SPECrate2017_int_peak = 81.9

CPU2017 License: 55

Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-27 03:01:43-0500.

Report generated on 2018-12-26 13:01:06 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.