



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55


Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

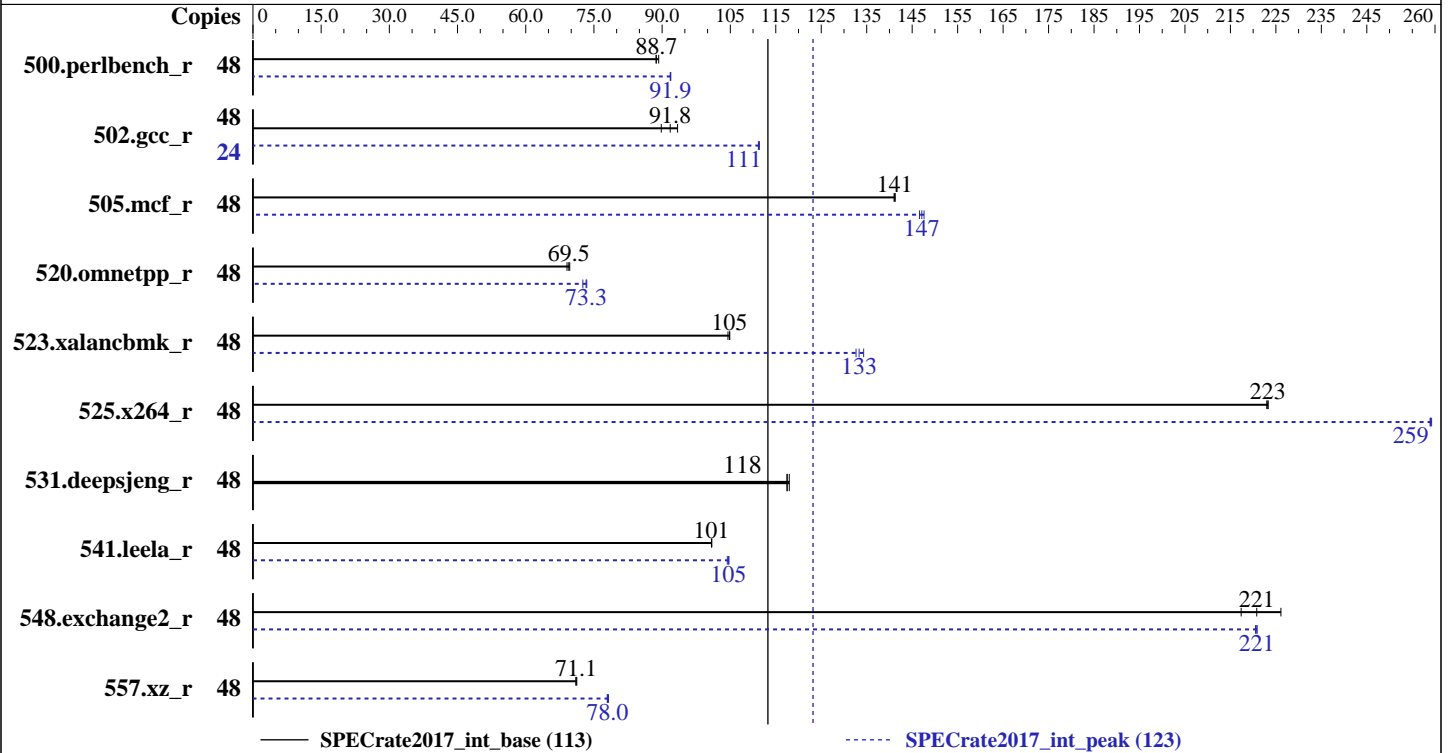

### Hardware

CPU Name: AMD EPYC 7401P  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4DRx4 PC4-2667V-L)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.126-94.22-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.6.7 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V4.5.0;



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	856	89.2	<b>861</b>	<b>88.7</b>	862	88.7	48	<b>832</b>	<b>91.9</b>	833	91.8	831	91.9
502.gcc_r	48	757	89.8	728	93.4	<b>741</b>	<b>91.8</b>	24	306	111	<b>305</b>	<b>111</b>	305	111
505.mcf_r	48	549	141	550	141	<b>550</b>	<b>141</b>	48	525	148	<b>527</b>	<b>147</b>	529	147
520.omnetpp_r	48	904	69.7	912	69.1	<b>907</b>	<b>69.5</b>	48	868	72.6	<b>859</b>	<b>73.3</b>	858	73.4
523.xalancbmk_r	48	485	104	483	105	<b>483</b>	<b>105</b>	48	377	134	382	133	<b>380</b>	<b>133</b>
525.x264_r	48	<b>376</b>	<b>223</b>	376	223	377	223	48	324	259	<b>324</b>	<b>259</b>	325	259
531.deepsjeng_r	48	468	117	466	118	<b>468</b>	<b>118</b>	48	468	117	466	118	<b>468</b>	<b>118</b>
541.leela_r	48	788	101	788	101	<b>788</b>	<b>101</b>	48	759	105	<b>760</b>	<b>105</b>	762	104
548.exchange2_r	48	579	217	<b>570</b>	<b>221</b>	556	226	48	569	221	<b>570</b>	<b>221</b>	570	221
557.xz_r	48	730	71.0	<b>730</b>	<b>71.1</b>	728	71.2	48	<b>665</b>	<b>78.0</b>	663	78.2	665	77.9

SPECrate2017\_int\_base = 113

SPECrate2017\_int\_peak = 123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1704-rate-libs-revD/64:/home/cpu2017-1.0.5/amd1704-rate-libs-revD/32:"
MALLOCCONF = "lg_chunk:26"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

jemalloc uses environment variable MALLOCCONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

## Platform Notes

BIOS settings:

Memory Interleaving set to Channel Interleaving

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States set to Autonomous

Memory Patrol Scrub disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management disabled

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Date: Dec-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

Determinism Slider set to Power Determinism  
Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-j270 Tue Dec 11 14:23:14 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7401P 24-Core Processor
  1 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             1
NUMA node(s):         4
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401P 24-Core Processor
Stepping:              2
CPU MHz:               1996.198
BogoMIPS:              3992.39
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Platform Notes (Continued)

```

constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 128621 MB
node 0 free: 128463 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 129018 MB
node 1 free: 128871 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 129018 MB
node 2 free: 128859 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 129017 MB
node 3 free: 128842 MB
node distances:
node  0  1  2  3
 0:  10  16  16  16
 1:  16  10  16  16
 2:  16  16  10  16
 3:  16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528052476 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Platform Notes (Continued)

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-j270 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB
```

run-level 3 Dec 11 14:14

SPEC is set to: /home/cpu2017-1.0.5

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   405G   16G  389G   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.6.7 10/29/2018

Memory:

```
8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666
8x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
-----

```
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2018  
Hardware Availability: Dec-2018  
Software Availability: Apr-2018

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 523.xalanbmk\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

CXXC 541.leela\_r(peak)

```
-----
AOCCLLVMM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
  AOCCLLVMM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----
```

=====  
FC 548.exchange2\_r(base, peak)

```
-----
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -z muldefs
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madox -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop
-fplugin-arg-dragonegg-llvm-option=-enable-iv-split
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Portability Flags (Continued)

```

502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

```

```

502.gcc_r: -m32 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -ljemalloc

```

```

505.mcf_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -ljemalloc

```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```

520.omnetpp_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -m32 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops
-ffast-math -Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-lsr-in-nested-loop
-fplugin-arg-dragonegg-llvm-option=-enable-iv-split
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

## Peak Other Flags

C benchmarks:

```
502.gcc_r: -L/root/work/lib/jemalloc/lib32
```

C++ benchmarks:

```
523.xalancbmk_r: -L/root/work/lib/jemalloc/lib32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 113

PowerEdge R6415 (AMD EPYC 7401P, 2.00GHz)

SPECrate2017\_int\_peak = 123

**CPU2017 License:** 55

**Test Date:** Dec-2018

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2018

**Tested by:** Dell Inc.

**Software Availability:** Apr-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-12-11 15:23:14-0500.

Report generated on 2019-01-22 16:47:24 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.