



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2019

Hardware Availability: Sep-2018

Software Availability: Nov-2018

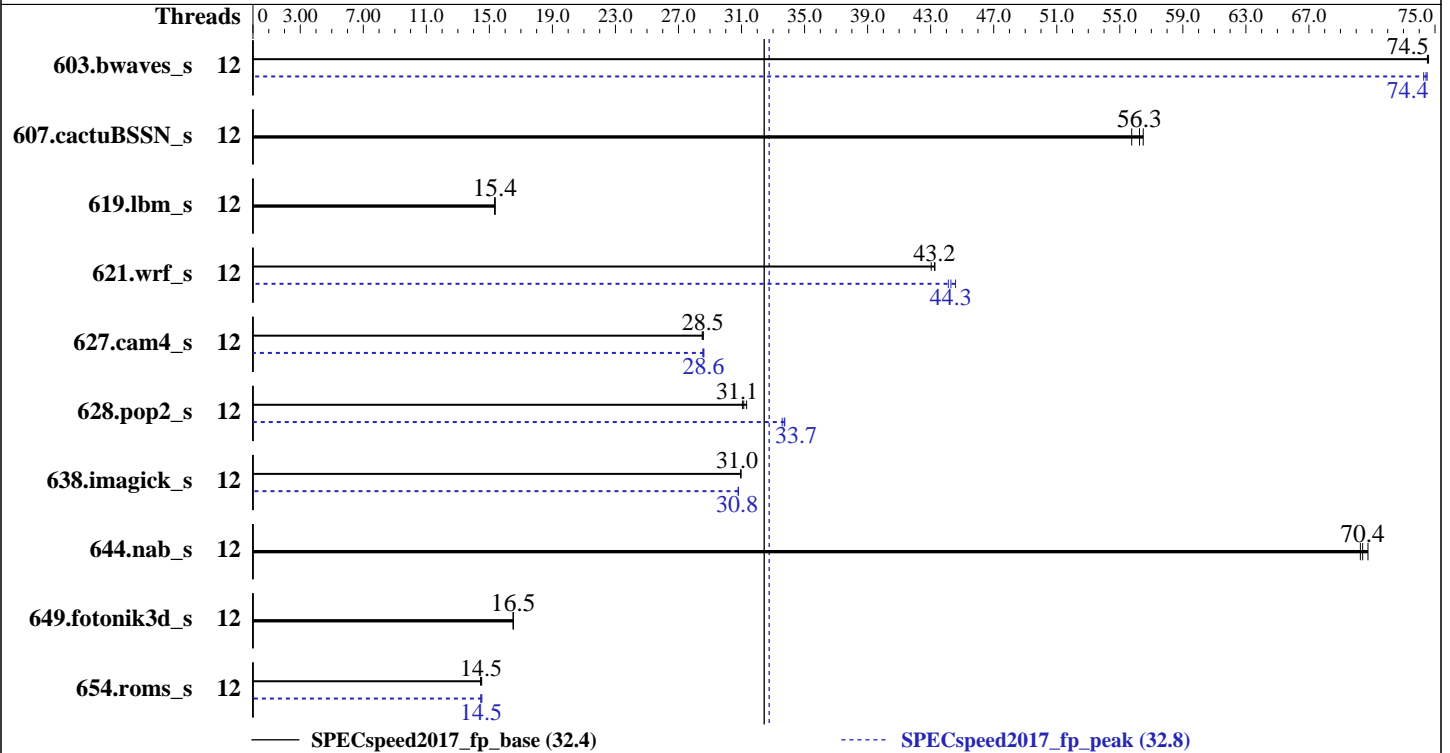

### Hardware

CPU Name: Intel Xeon E-2136  
 Max MHz.: 4500  
 Nominal: 3300  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 500 GB SATA HDD, 7200RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.120-94.17-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 0303 released Aug-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2019

Hardware Availability: Sep-2018

Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	12	791	74.6	<u>791</u>	<u>74.5</u>	792	74.5	12	<u>793</u>	<u>74.4</u>	794	74.3	792	74.5
607.cactuBSSN_s	12	295	56.5	<u>296</u>	<u>56.3</u>	299	55.8	12	295	56.5	<u>296</u>	<u>56.3</u>	299	55.8
619.lbm_s	12	341	15.4	341	15.3	<u>341</u>	<u>15.4</u>	12	341	15.4	341	15.3	<u>341</u>	<u>15.4</u>
621.wrf_s	12	<u>306</u>	<u>43.2</u>	306	43.3	307	43.0	12	297	44.6	<u>299</u>	<u>44.3</u>	300	44.1
627.cam4_s	12	<u>311</u>	<u>28.5</u>	311	28.5	310	28.6	12	311	28.5	<u>310</u>	<u>28.6</u>	310	28.6
628.pop2_s	12	382	31.1	<u>381</u>	<u>31.1</u>	379	31.3	12	<u>352</u>	<u>33.7</u>	352	33.7	354	33.6
638.imagick_s	12	466	30.9	<u>466</u>	<u>31.0</u>	466	31.0	12	<u>468</u>	<u>30.8</u>	468	30.8	469	30.8
644.nab_s	12	247	70.7	<u>248</u>	<u>70.4</u>	249	70.3	12	247	70.7	<u>248</u>	<u>70.4</u>	249	70.3
649.fotonik3d_s	12	552	16.5	552	16.5	<u>552</u>	<u>16.5</u>	12	552	16.5	552	16.5	<u>552</u>	<u>16.5</u>
654.roms_s	12	<u>1088</u>	<u>14.5</u>	1085	14.5	1090	14.4	12	<u>1088</u>	<u>14.5</u>	1084	14.5	1089	14.5

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec2017\_2019u1/lib/ia32:/spec2017\_2019u1/lib/intel64:/spec2017\_2019u1/je5.0.1-32:/spec2017\_2019u1/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2018

**Software Availability:** Nov-2018

## Platform Notes

BIOS Configuration:

VT-d = Disabled

AES = Disabled

Sysinfo program /spec2017\_2019u1/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Wed Feb 20 15:03:17 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2136 CPU @ 3.30GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2136 CPU @ 3.30GHz

Stepping: 10

CPU MHz: 4349.615

CPU max MHz: 4500.0000

CPU min MHz: 800.0000

BogoMIPS: 6623.99

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 12288K

NUMA node0 CPU(s): 0-11

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2018

**Software Availability:** Nov-2018

### Platform Notes (Continued)

```
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 64313 MB
node 0 free: 63786 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65857424 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2019

Hardware Availability: Sep-2018

Software Availability: Nov-2018

### Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Feb 20 14:58

SPEC is set to: /spec2017\_2019u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	445G	116G	329G	27%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0303 08/07/2018

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

icc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
FC 607.cactuBSSN\_s(base, peak)  
=====

icpc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

ifort (IFORT) 19.0.1.144 20181018

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2019

Hardware Availability: Sep-2018

Software Availability: Nov-2018

### Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 603.bwaves\_s(peak)

ifort (IFORT) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)

ifort (IFORT) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf\_s(peak) 628.pop2\_s(peak)

ifort (IFORT) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2018

**Software Availability:** Nov-2018

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2018

**Software Availability:** Nov-2018

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

```
638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

(Continued on next page)





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS300-E10(P11C-C/4L) Server System  
(3.30 GHz, Intel Xeon E-2136)

SPECspeed2017\_fp\_base = 32.4

SPECspeed2017\_fp\_peak = 32.8

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2019

**Hardware Availability:** Sep-2018

**Software Availability:** Nov-2018

## Peak Optimization Flags (Continued)

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-02-20 02:03:16-0500.

Report generated on 2019-04-16 17:14:29 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-16.