



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3


**Test Date:** May-2019

Test Sponsor: HPE

**Hardware Availability:** Apr-2019

Tested by: HPE

**Software Availability:** Feb-2019

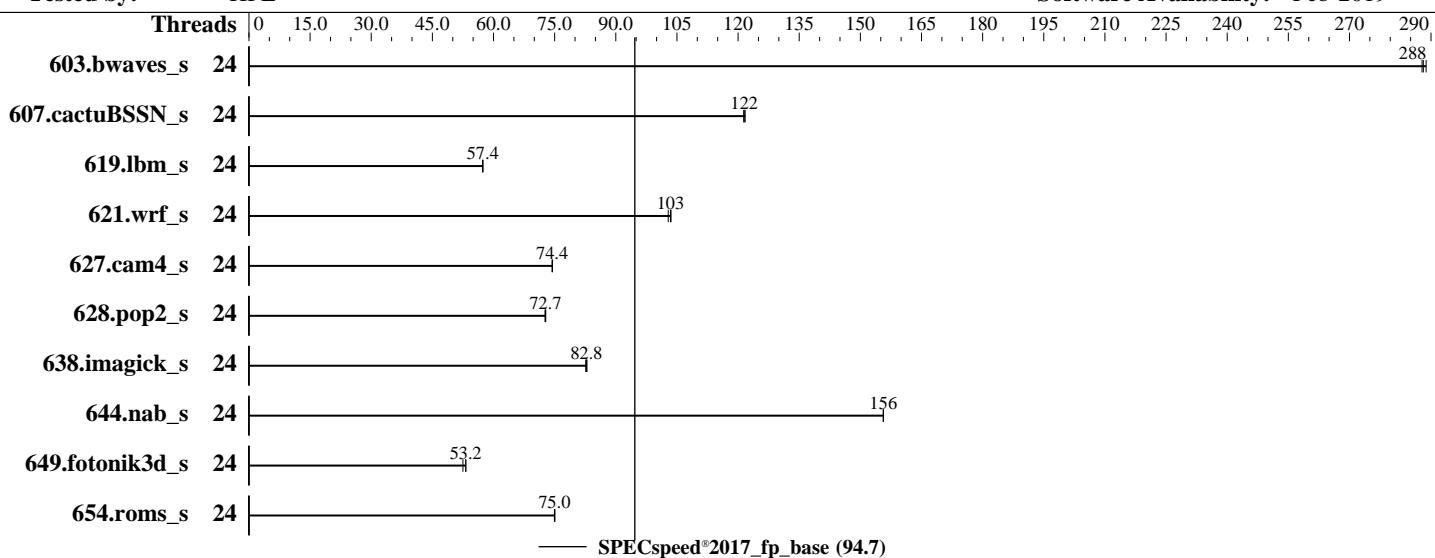

## Hardware

CPU Name: Intel Xeon Gold 6212U  
 Max MHz: 3900  
 Nominal: 2400  
 Enabled: 24 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Compiler: Kernel 4.12.14-23-default  
 C/C++: Version 19.0.2.187 of Intel C/C++  
 Compiler Build 20190117 for Linux;  
 Fortran: Version 19.0.2.187 of Intel Fortran  
 Compiler Build 20190117 for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U30 04/18/2019 released Apr-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	204	289	205	288	<b>205</b>	<b>288</b>							
607.cactuBSSN_s	24	137	122	<u>137</u>	<u>122</u>	137	121							
619.lbm_s	24	<u>91.3</u>	<u>57.4</u>	91.4	57.3	91.3	57.4							
621.wrf_s	24	129	103	<u>128</u>	<u>103</u>	128	104							
627.cam4_s	24	<u>119</u>	<u>74.4</u>	119	74.5	119	74.4							
628.pop2_s	24	<u>163</u>	<u>72.7</u>	163	72.8	163	72.6							
638.imagick_s	24	<u>174</u>	<u>82.8</u>	174	82.9	175	82.6							
644.nab_s	24	112	156	112	156	<u>112</u>	<u>156</u>							
649.fotonik3d_s	24	<u>171</u>	<u>53.2</u>	171	53.2	174	52.5							
654.roms_s	24	210	75.1	<u>210</u>	<u>75.0</u>	210	74.9							
<b>SPECspeed®2017_fp_base = 94.7</b>														

**SPECspeed®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017\_fpspeed/lib/ia32:/home/cpu2017\_fpspeed/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3

**Test Date:** May-2019

Test Sponsor: HPE

**Hardware Availability:** Apr-2019

Tested by: HPE

**Software Availability:** Feb-2019

## Platform Notes (Continued)

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Balanced Power

Workload Profile set to Custom

Numa Group Size Optimization set to Flat

Sysinfo program /home/cpu2017\_fpspeed/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcd8f2999c33d61f64985e45859ea9

running on dl380-clx-sles15 Wed May 29 20:32:32 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6212U CPU @ 2.40GHz

1 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 1

Core(s) per socket: 24

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6212U CPU @ 2.40GHz

Stepping: 6

CPU MHz: 2400.000

BogoMIPS: 4800.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

```
L3 cache: 36608K
NUMA node0 CPU(s): 0-23
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpfperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbe fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_13 cdp_13 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 386355 MB
node 0 free: 382085 MB
node distances:
node 0
0: 10
```

From /proc/meminfo

```
MemTotal: 395627944 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux dl380-clx-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018
(cd0437b) x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 May 29 18:13

SPEC is set to: /home/cpu2017\_fpspeed

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	407G	89G	318G	22%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 04/18/2019

Memory:

12x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.1bm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

SPECspeed®2017\_fp\_base = 94.7

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactusBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

SPECspeed®2017\_fp\_base = 94.7

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Portability Flags (Continued)

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>  
<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.2019-04-03.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>  
<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.2019-04-03.00.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.40 GHz, Intel Xeon Gold 6212U)

**SPECspeed®2017\_fp\_base = 94.7**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-05-29 20:32:31-0400.

Report generated on 2019-11-05 10:47:14 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-04.