



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2019  
Hardware Availability: Oct-2019  
Software Availability: May-2019

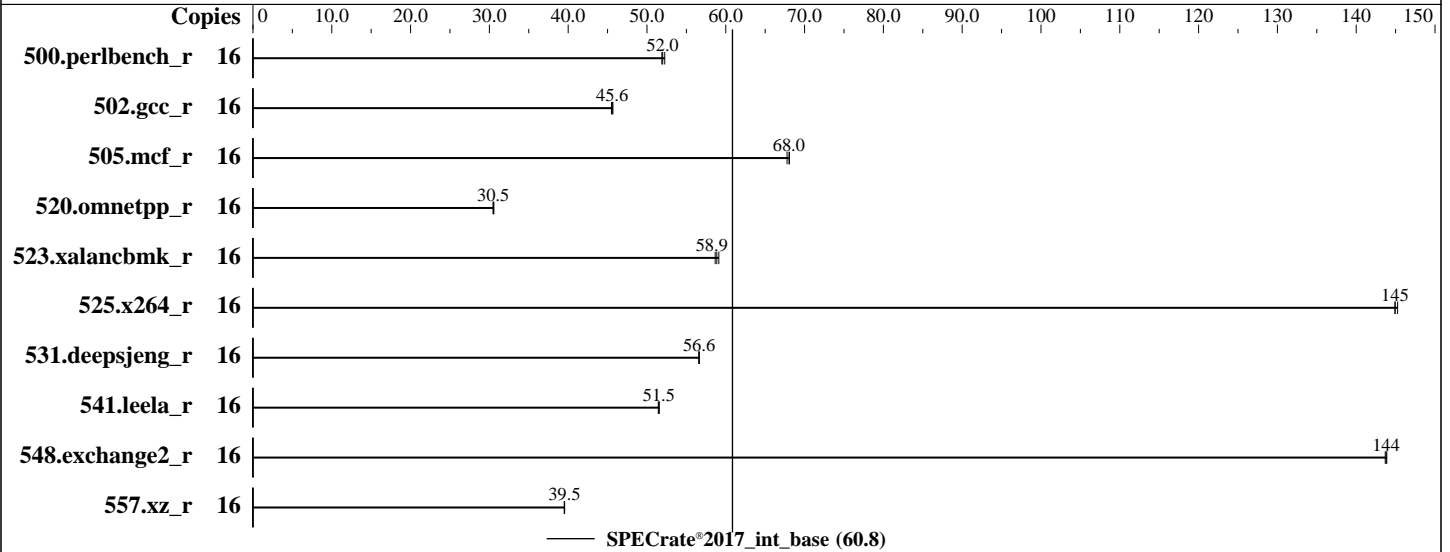

### Hardware

CPU Name: Intel Xeon E-2288G  
Max MHz: 5000  
Nominal: 3700  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 16 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x SATA M.2 SSD, 480 GB  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
4.12.14-25.28-default  
Compiler: C/C++: Version 19.0.4.227 of Intel  
C/C++ Compiler for Linux;  
Fortran: Version 19.0.4.227 of  
Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2019  
Hardware Availability: Oct-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	487	52.3	491	51.9	<b>490</b>	<b>52.0</b>							
502.gcc_r	16	498	45.5	<b>497</b>	<b>45.6</b>	496	45.7							
505.mcf_r	16	381	67.8	380	68.1	<b>380</b>	<b>68.0</b>							
520.omnetpp_r	16	689	30.5	687	30.6	<b>688</b>	<b>30.5</b>							
523.xalancbmk_r	16	<b>287</b>	<b>58.9</b>	288	58.7	286	59.1							
525.x264_r	16	193	145	<b>193</b>	<b>145</b>	193	145							
531.deepsjeng_r	16	324	56.6	<b>324</b>	<b>56.6</b>	324	56.6							
541.leela_r	16	515	51.4	514	51.5	<b>514</b>	<b>51.5</b>							
548.exchange2_r	16	292	144	<b>292</b>	<b>144</b>	291	144							
557.xz_r	16	437	39.5	437	39.6	<b>437</b>	<b>39.5</b>							

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-15

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Platform Notes

BIOS configuration:  
Adjacent Cache Line Prefetch = Disabled  
C states = Disabled  
Fan Control = Full  
Hardware Prefetcher = Disabled  
Intel Virtualization Technology = Disabled  
Intel Speed Shift Technology = Disabled  
Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on SLES15-BMT Sun Oct 13 15:58:03 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
cpu cores      : 8
siblings       : 16
physical 0:    cores 0 1 2 3 4 5 6 7
```

```
From lscpu:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          16
On-line CPU(s) list: 0-15
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s):       1
NUMA node(s):   1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           158
Model name:      Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
Stepping:        13
CPU MHz:         3700.000
CPU max MHz:     5000.0000
CPU min MHz:     800.0000
BogoMIPS:        7392.00
Virtualization:  VT-x
L1d cache:       32K
L1i cache:       32K
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

L2 cache:          256K
L3 cache:          16384K
NUMA node0 CPU(s): 0-15
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt
intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify
hwp_act_window hwp_epp flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16384 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 63925 MB
node 0 free: 63426 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:      65459484 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux SLES15-BMT 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Oct 13 15:52

SPEC is set to: /home/Benchmark/speccpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 343G 47G 297G 14% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x  
09/06/2019

Memory:  
4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
525.x264\_r(base) 557.xz\_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** May-2019

## Compiler Version Notes (Continued)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11  
  
C++ benchmarks:  
icpc -m64  
  
Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc  
  
C++ benchmarks:  
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M4, Intel Xeon E-2288G,  
3.70 GHz

SPECrate®2017\_int\_base = 60.8

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Oct-2019

**Hardware Availability:** Oct-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.2019-11-01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.2019-11-01.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-13 02:58:03-0400.

Report generated on 2019-11-01 10:43:29 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-01.