



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

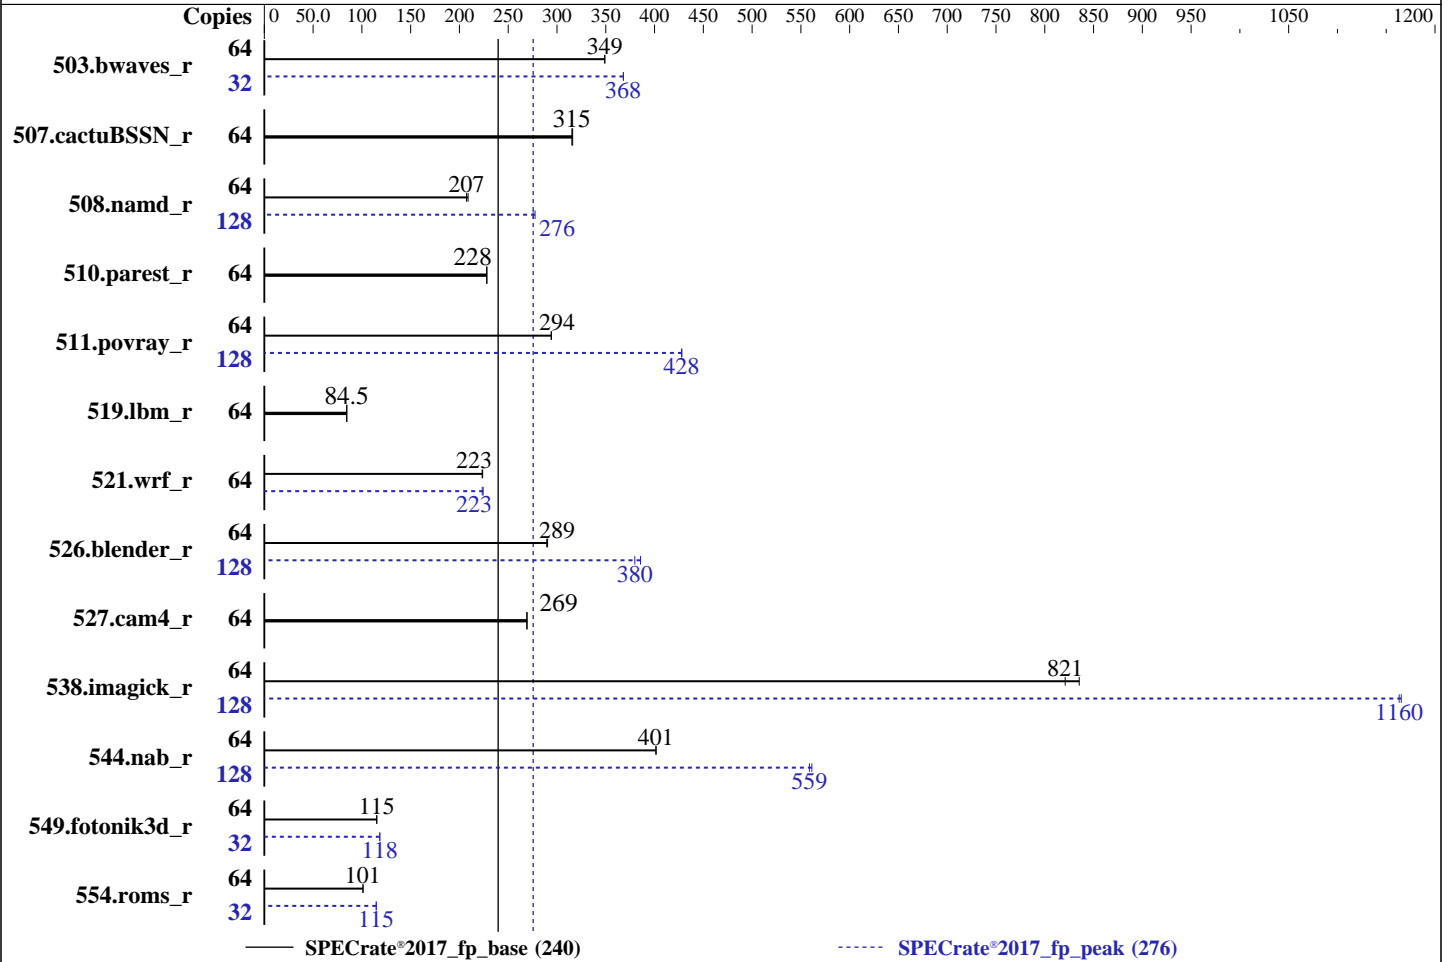

### Hardware

CPU Name: AMD EPYC 7662  
 Max MHz: 3300  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.3.0 released Jan-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2020  
Hardware Availability: Apr-2020  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b>1839</b>	<b>349</b>	1839	349			32	<b>872</b>	<b>368</b>	872	368		
507.cactuBSSN_r	64	256	316	<b>257</b>	<b>315</b>			64	256	316	<b>257</b>	<b>315</b>		
508.namd_r	64	<b>293</b>	<b>207</b>	291	209			128	438	278	<b>441</b>	<b>276</b>		
510.parest_r	64	<b>735</b>	<b>228</b>	734	228			64	<b>735</b>	<b>228</b>	734	228		
511.povray_r	64	508	294	<b>508</b>	<b>294</b>			128	<b>699</b>	<b>428</b>	698	428		
519.lbm_r	64	<b>799</b>	<b>84.5</b>	798	84.6			64	<b>799</b>	<b>84.5</b>	798	84.6		
521.wrf_r	64	<b>642</b>	<b>223</b>	641	224			64	<b>642</b>	<b>223</b>	639	224		
526.blender_r	64	336	290	<b>337</b>	<b>289</b>			128	506	386	<b>513</b>	<b>380</b>		
527.cam4_r	64	415	269	<b>416</b>	<b>269</b>			64	415	269	<b>416</b>	<b>269</b>		
538.imagick_r	64	191	835	<b>194</b>	<b>821</b>			128	<b>274</b>	<b>1160</b>	273	1170		
544.nab_r	64	268	402	<b>268</b>	<b>401</b>			128	<b>386</b>	<b>559</b>	384	561		
549.fotonik3d_r	64	2164	115	<b>2164</b>	<b>115</b>			32	1053	118	<b>1054</b>	<b>118</b>		
554.roms_r	64	1005	101	<b>1006</b>	<b>101</b>			32	443	115	<b>443</b>	<b>115</b>		

SPECrate®2017\_fp\_base = 240

SPECrate®2017\_fp\_peak = 276

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/root/cpu2017-1.1.0/amd\_rate\_aocc200\_rome\_C\_lib/64:/root/cpu2017-1.1.0/amd\_rate\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4

CCX as NUMA Domain set to Enabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost Enabled

Cstates set to Enabled

Memory Patrol Scrub Disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management Disabled

Determinism Slider set to Power Determinism

Efficiency Optimized Mode Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

Memory Interleaving set to Disabled  
Memory Freq set to 3200  
Fan Speed = Maximum  
ApbDis = disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-g3ob Wed Jan 22 18:45:21 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7662 64-Core Processor  
1 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 64  
siblings : 128  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59 60 61 62 63

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 43 bits physical, 48 bits virtual  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 64  
Socket(s): 1  
NUMA node(s): 16  
Vendor ID: AuthenticAMD  
CPU family: 23  
Model: 49  
Model name: AMD EPYC 7662 64-Core Processor  
Stepping: 0  
CPU MHz: 1996.267  
BogoMIPS: 3992.53  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

L3 cache:                16384K
NUMA node0 CPU(s):      0-3,64-67
NUMA node1 CPU(s):      4-7,68-71
NUMA node2 CPU(s):      8-11,72-75
NUMA node3 CPU(s):      12-15,76-79
NUMA node4 CPU(s):      16-19,80-83
NUMA node5 CPU(s):      20-23,84-87
NUMA node6 CPU(s):      24-27,88-91
NUMA node7 CPU(s):      28-31,92-95
NUMA node8 CPU(s):      32-35,96-99
NUMA node9 CPU(s):      36-39,100-103
NUMA node10 CPU(s):     40-43,104-107
NUMA node11 CPU(s):     44-47,108-111
NUMA node12 CPU(s):     48-51,112-115
NUMA node13 CPU(s):     52-55,116-119
NUMA node14 CPU(s):     56-59,120-123
NUMA node15 CPU(s):     60-63,124-127

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 15548 MB
node 0 free: 15277 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 16126 MB
node 1 free: 15903 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 16126 MB
node 2 free: 15885 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 16125 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 3 free: 15875 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 16126 MB
node 4 free: 15922 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 16126 MB
node 5 free: 15919 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 16096 MB
node 6 free: 15895 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 16125 MB
node 7 free: 15925 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 16126 MB
node 8 free: 15911 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 16126 MB
node 9 free: 15920 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 16126 MB
node 10 free: 15926 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 16125 MB
node 11 free: 15922 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 16126 MB
node 12 free: 15905 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 16126 MB
node 13 free: 15924 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 16126 MB
node 14 free: 15925 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 16111 MB
node 15 free: 15907 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
  1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
  2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
  3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
  4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12
  5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12
  6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12
  7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

8:	12	12	12	12	12	12	12	12	10	11	11	11	12	12	12	12
9:	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	12
10:	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	12
11:	12	12	12	12	12	12	12	12	11	11	11	10	12	12	12	12
12:	12	12	12	12	12	12	12	12	12	12	12	12	10	11	11	11
13:	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11
14:	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11
15:	12	12	12	12	12	12	12	12	12	12	12	12	11	11	11	10

From /proc/meminfo

```
MemTotal:      263574100 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Nov 25 12:20 last=5

SPEC is set to: /root/cpu2017-1.1.0

```
Filesystem      Type      Size      Used      Avail      Use%      Mounted on
/dev/sda2       xfs       440G      36G      405G       9%      /
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2020  
Hardware Availability: Apr-2020  
Software Availability: Aug-2019

## Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
  BIOS:    Dell Inc. 1.3.0 01/14/2020
  Vendor:  Dell Inc.
  Product: PowerEdge R7515
  Product Family: PowerEdge
  Serial:  5MGPH13
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  8x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
  8x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
          | 544.nab_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++        | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++, C     | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
```

```
=====  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
        | 554.roms_r(base, peak)
```

```
=====  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====  
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

```
=====  
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

```

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

```
538.imagick_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

526.blender\_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 240

PowerEdge R7515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017\_fp\_peak = 276

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-22 19:45:21-0500.

Report generated on 2020-04-14 15:19:26 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.