



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jun-2019

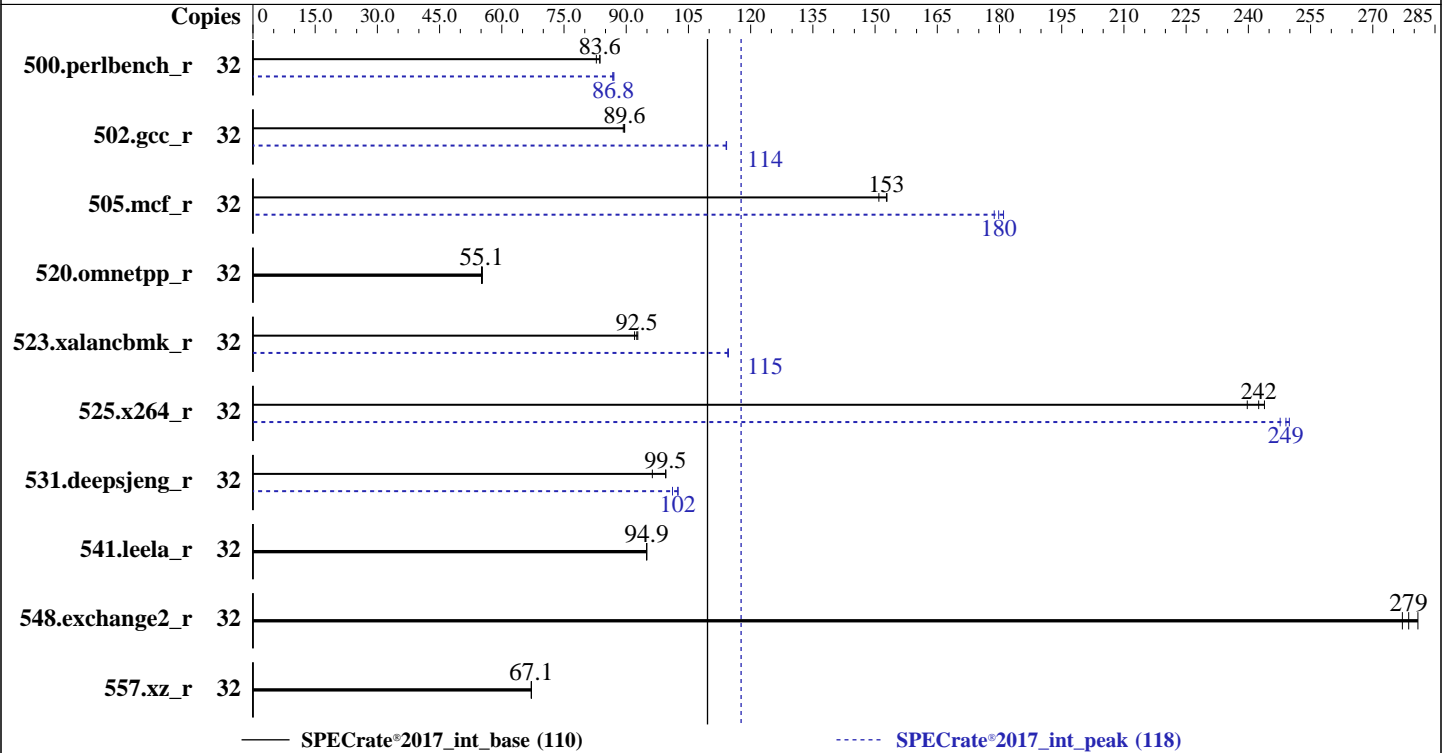

### Hardware

CPU Name: AMD EPYC 7282  
 Max MHz: 3200  
 Nominal: 2800  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 240 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 0501 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	615	82.8	<b>609</b>	<b>83.6</b>	609	83.7	32	587	86.8	585	87.0	<b>587</b>	<b>86.8</b>
502.gcc_r	32	<b>506</b>	<b>89.6</b>	506	89.6	507	89.3	32	397	114	397	114	<b>397</b>	<b>114</b>
505.mcf_r	32	343	151	<b>339</b>	<b>153</b>	338	153	32	<b>288</b>	<b>180</b>	286	181	289	179
520.omnetpp_r	32	759	55.3	<b>761</b>	<b>55.1</b>	762	55.1	32	759	55.3	<b>761</b>	<b>55.1</b>	762	55.1
523.xalancbmk_r	32	364	92.8	367	92.0	<b>365</b>	<b>92.5</b>	32	295	115	<b>295</b>	<b>115</b>	295	114
525.x264_r	32	234	240	<b>231</b>	<b>242</b>	230	244	32	<b>225</b>	<b>249</b>	224	250	226	248
531.deepsjeng_r	32	<b>369</b>	<b>99.5</b>	368	99.6	381	96.3	32	<b>358</b>	<b>102</b>	363	101	358	103
541.leela_r	32	558	94.9	<b>558</b>	<b>94.9</b>	558	94.9	32	558	94.9	<b>558</b>	<b>94.9</b>	558	94.9
548.exchange2_r	32	303	277	<b>301</b>	<b>279</b>	298	281	32	303	277	<b>301</b>	<b>279</b>	298	281
557.xz_r	32	515	67.1	515	67.1	<b>515</b>	<b>67.1</b>	32	515	67.1	515	67.1	<b>515</b>	<b>67.1</b>

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Operating System Notes (Continued)

OS set to performance mode via cpupower frequency-set -g performance.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/spec2017c3/amd\_rate\_aocc200\_rome\_C\_lib/64:/spec2017c3/amd\_rate\_aocc200\_rome\_C\_lib/32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flt0  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Configuration:

Power phase shedding = Disabled

SVM Mode = Disabled

SR-IOV support = Disabled

DRAM Scrub time = Disabled

Determinism Slider = Power

Sysinfo program /spec2017c3/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-wv9n Sun Mar 22 10:43:01 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jun-2019

### Platform Notes (Continued)

model name : AMD EPYC 7282 16-Core Processor

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              1
NUMA node(s):          1
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7282 16-Core Processor
Stepping:               0
CPU MHz:                2800.000
CPU max MHz:            2800.0000
CPU min MHz:            1500.0000
BogoMIPS:               5656.20
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jun-2019

### Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
node 0 size: 515818 MB
node 0 free: 515045 MB
node distances:
node    0
0:    10
```

```
From /proc/meminfo
MemTotal:      528197632 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-wv9n 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

```
run-level 3 Mar 20 14:35
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2020

Hardware Availability: Nov-2019

Software Availability: Jun-2019

### Platform Notes (Continued)

SPEC is set to: /spec2017c3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdd4	xf	199G	18G	182G	9%	/

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 0501 11/07/2019

Vendor: ASUSTeK COMPUTER INC.

Product: KRPA-U16 Series

Product Family: Server

Serial: System Serial Number

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M393A8G40AB2-CWE 64 kB 2 rank 3200

8x Unknown Unknown

(End of data from sysinfo program)

### Compiler Version Notes

C | 502.gcc\_r(peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

### Compiler Version Notes (Continued)

C | 502.gcc\_r(peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Base Portability Flags (Continued)

525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc  
-lflang
```

### C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

### Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS500A-E10(KRPA-U16) Server System  
2.80 GHz, AMD EPYC 7282

SPECrate®2017\_int\_base = 110

SPECrate®2017\_int\_peak = 118

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2020

**Hardware Availability:** Nov-2019

**Software Availability:** Jun-2019

## Peak Optimization Flags (Continued)

```
531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/sppo/dev/cpu2017/v110/amd\_rate\_aocc200\_rome\_C\_lib/32

C++ benchmarks:

523.xalancbmk\_r: -L/sppo/dev/cpu2017/v110/amd\_rate\_aocc200\_rome\_C\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Rome-V1.0-revG.html>

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Rome-V1.0-revG.xml>

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.2019-09-17.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-21 22:43:00-0400.

Report generated on 2020-04-14 14:04:28 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.