



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu


PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

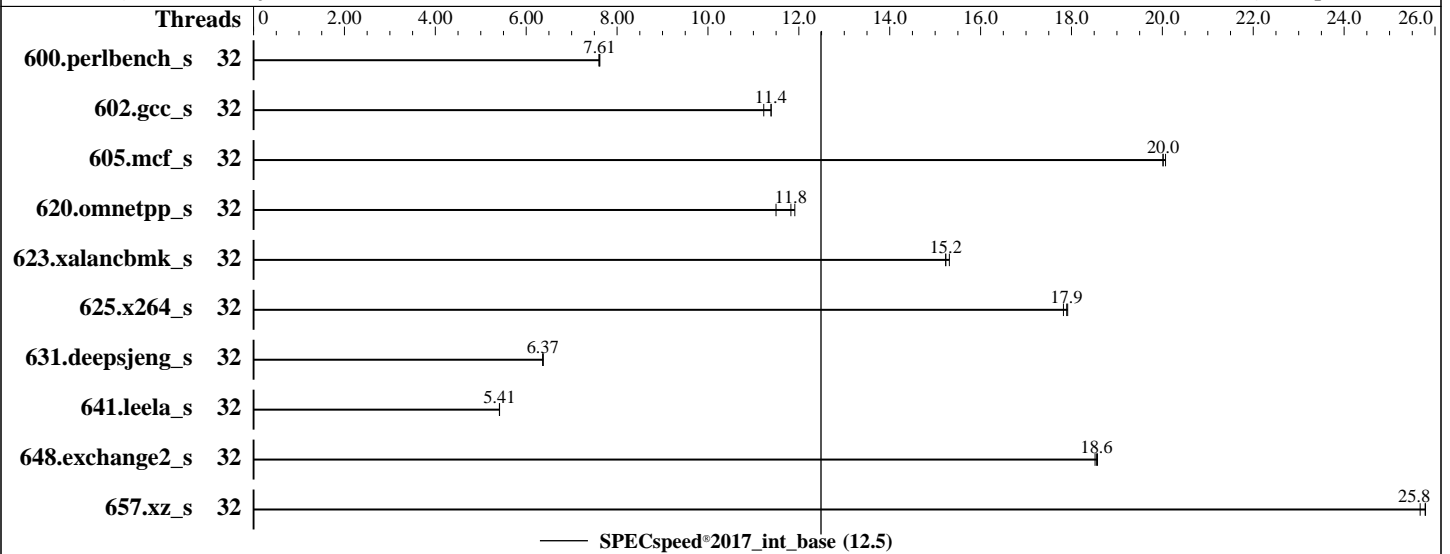

Hardware

CPU Name: Intel Xeon Platinum 8356H
 Max MHz: 4400
 Nominal: 3900
 Enabled: 32 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.8.0 for D3892-A1x. Released Jan-2021 tested as V1.0.0.0 R1.1.1 for D3892-A1x Sep-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	233	7.61	234	7.60	233	7.62							
602.gcc_s	32	350	11.4	350	11.4	355	11.2							
605.mcf_s	32	236	20.0	236	20.0	235	20.1							
620.omnetpp_s	32	137	11.9	142	11.5	138	11.8							
623.xalancbmk_s	32	93.0	15.2	93.0	15.2	92.5	15.3							
625.x264_s	32	99.0	17.8	98.5	17.9	98.6	17.9							
631.deepsjeng_s	32	225	6.36	225	6.37	225	6.37							
641.leela_s	32	315	5.41	315	5.41	315	5.41							
648.exchange2_s	32	158	18.6	159	18.5	158	18.6							
657.xz_s	32	240	25.8	241	25.7	240	25.8							

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-31

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/PVT/speccpu/lib/intel64:/home/PVT/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper Threading = Disabled
Override OS Energy Performance = Enabled
Energy Performance = Performance
HWPM Support = OOB mode
Stale AtoS = Disabled

Sysinfo program /home/PVT/speccpu/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Mon Oct 12 08:47:14 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
4 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 2 5 6 8 10 17 19 28
physical 1: cores 2 3 5 6 12 16 18 19
physical 2: cores 1 6 8 10 17 19 28 29
physical 3: cores 2 10 13 17 18 19 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

```

Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8356H CPU @ 3.90GHz
Stepping: 11
CPU MHz: 1200.022
BogoMIPS: 7800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 dtherm ida arat pln pts hwp_epp pku ospke avx512_vnni
md_clear flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 385227 MB
node 0 free: 384903 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 387042 MB
node 1 free: 386790 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 387069 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

```

node 2 free: 386594 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 387069 MB
node 3 free: 386682 MB
node distances:
node   0   1   2   3
  0:  10  20  20  20
  1:  20  10  20  20
  2:  20  20  10  20
  3:  20  20  20  10

```

```

From /proc/meminfo
MemTotal:      1583521956 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:                Not affected
CVE-2018-3620 (L1 Terminal Fault):    Not affected
Microarchitectural Data Sampling:    Not affected
CVE-2017-5754 (Meltdown):            Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):    Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):    Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
tsx_async_abort:                Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Platform Notes (Continued)

run-level 3 Oct 12 06:04

SPEC is set to: /home/PVT/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 330G 11G 319G 4% /home

From /sys/devices/virtual/dmi/id
BIOS: FUJITSU V1.0.0.0 R1.1.1 for D3892-Alx 09/25/2020
Vendor: FUJITSU
Product: PRIMERGY RX4770 M6
Product Family: SERVER
Serial: MABTxxxxxx

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
| 625.x264_s(base) 657.xz_s(base)
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
| 641.leela_s(base)
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

=====
Fortran | 648.exchange2_s(base)
=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H, 3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Oct-2020
Hardware Availability: Nov-2020
Software Availability: Apr-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M6, Intel Xeon Platinum 8356H,
3.90GHz

SPECspeed®2017_int_base = 12.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2020

Hardware Availability: Nov-2020

Software Availability: Apr-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512  
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.html>

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CPL-RevA.xml>

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-12 08:47:13-0400.

Report generated on 2020-10-27 16:16:38 by CPU2017 PDF formatter v6255.

Originally published on 2020-10-27.