



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081


Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

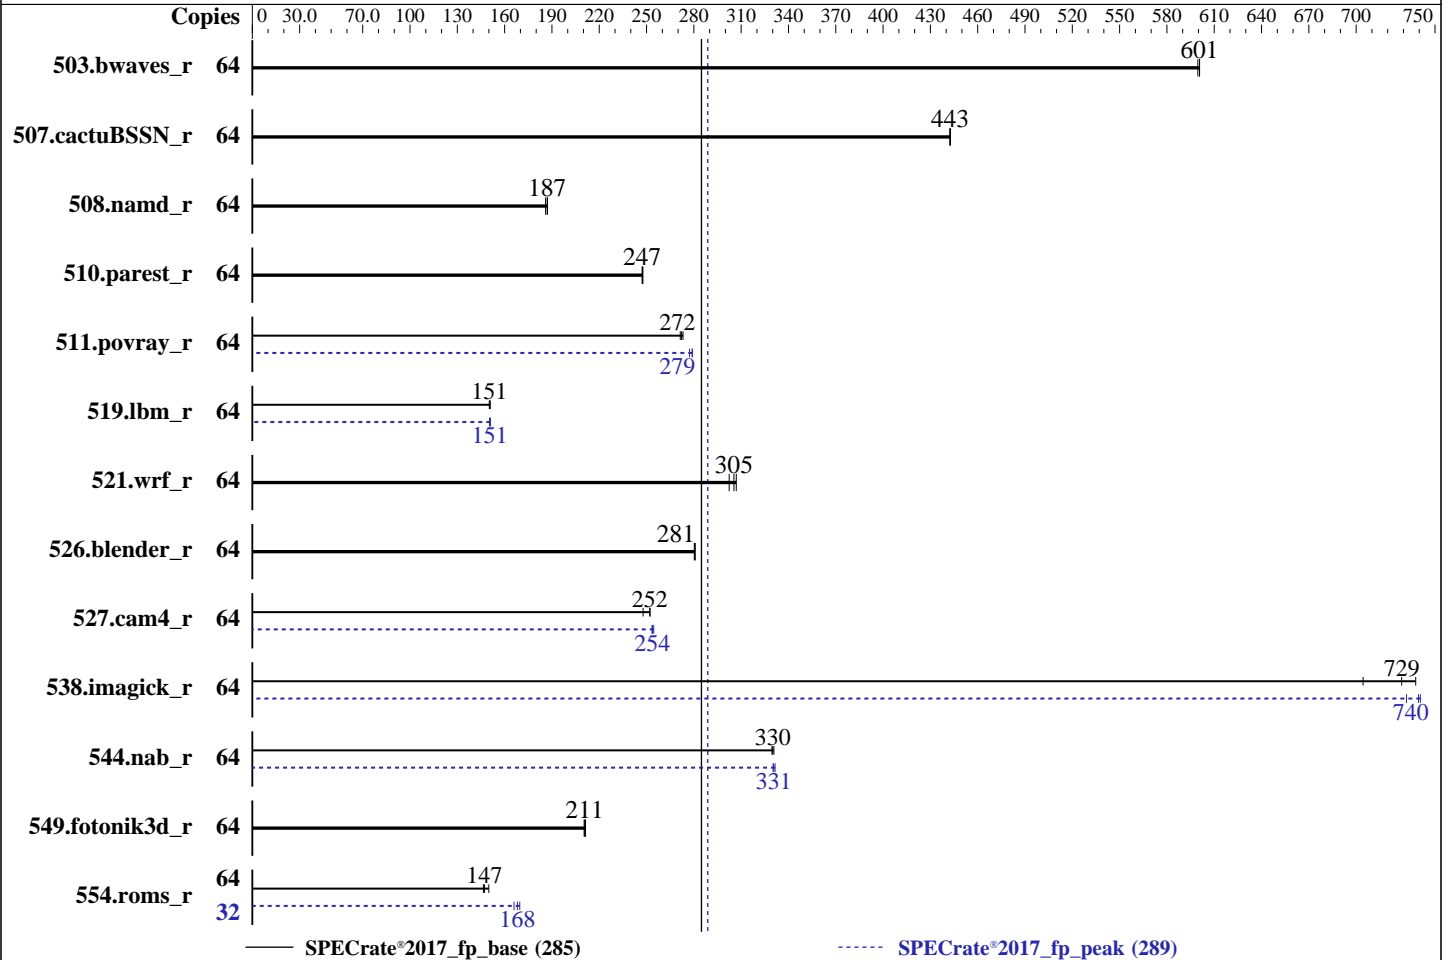

Hardware

CPU Name: AMD EPYC 7302
 Max MHz: 3300
 Nominal: 3000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 2 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200V-L)
 Storage: 1 x 960 GB SSD SATA III
 Other: None

Software

OS: CentOS Linux 8.2
 kernel version 4.18.0-193.19.1.el8_2.x86_64
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 3003 released Jul-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285

SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1068	601	1070	600	1068	601	64	1068	601	1070	600	1068	601
507.cactuBSSN_r	64	183	443	183	443	183	442	64	183	443	183	443	183	442
508.namd_r	64	325	187	327	186	325	187	64	325	187	327	186	325	187
510.parest_r	64	676	248	677	247	677	247	64	676	248	677	247	677	247
511.povray_r	64	549	272	551	271	547	273	64	539	277	536	279	536	279
519.lbm_r	64	449	150	448	151	447	151	64	447	151	448	151	448	150
521.wrf_r	64	467	307	474	302	469	305	64	467	307	474	302	469	305
526.blender_r	64	348	280	347	281	347	281	64	348	280	347	281	347	281
527.cam4_r	64	452	248	444	252	444	252	64	440	255	442	253	441	254
538.imagick_r	64	216	738	218	729	226	704	64	215	740	217	732	215	741
544.nab_r	64	327	330	326	331	326	330	64	325	332	326	331	326	330
549.fotonik3d_r	64	1183	211	1180	211	1185	210	64	1183	211	1180	211	1185	210
554.roms_r	64	694	147	691	147	678	150	32	300	170	306	166	302	168

SPECrate®2017_fp_base = **285**

SPECrate®2017_fp_peak = **289**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/home/CPU2017-1.1.0/  
    amd_rate_aocc200_rome_C_lib/32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:

Power phase shedding = Disabled

SVM Mode = Disabled

SR-IOV support = Disabled

DRAM Scrub time = Disabled

NUMA nodes per socket = NPS4

Determinism Slider = Power

Sysinfo program /home/CPU2017-1.1.0/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on Zyxel Tue Oct 20 13:40:51 2020

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285

SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7302 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7302 16-Core Processor
Stepping: 0
CPU MHz: 2858.599
CPU max MHz: 3000.0000
CPU min MHz: 1500.0000
BogoMIPS: 6000.47
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285

SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 64063 MB
node 0 free: 63882 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 64508 MB
node 1 free: 64235 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 64481 MB
node 2 free: 64211 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 64496 MB
node 3 free: 64325 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 64508 MB
node 4 free: 64356 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 64508 MB
node 5 free: 64381 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 64508 MB
node 6 free: 64380 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 64509 MB
node 7 free: 64381 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 12 12 12 32 32 32 32
 1:  12 10 12 12 32 32 32 32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Platform Notes (Continued)

2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

```
MemTotal:      527961084 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 8.2.2004 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.2.2004 (Core)
system-release: CentOS Linux release 8.2.2004 (Core)
system-release-cpe: cpe:/o:centos:centos:8
```

uname -a:

```
Linux Zyxel 4.18.0-193.19.1.el8_2.x86_64 #1 SMP Mon Sep 14 14:37:00 UTC 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit: Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
srbds: Not affected
tsx_async_abort: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Platform Notes (Continued)

run-level 3 Oct 20 05:15

SPEC is set to: /home/CPU2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl_zyxel-home	xfs	839G	9.7G	829G	2%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 3003 07/10/2020

Vendor: ASUSTeK COMPUTER INC.

Product: KNPP-D32-R Series

Product Family: Server

Serial: System Serial Number

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 36ASF4G72PZ-3G2E2 32 kB 2 rank 3200

16x Unknown Unknown

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
=====

```

```

-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285
SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285

SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

554.roms_r (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

526.blender_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa
eterio 217 RZ1 (AMD Epyc 7302, 3.0 GHz)
AMD EPYC 7302

SPECrate®2017_fp_base = 285

SPECrate®2017_fp_peak = 289

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020

Hardware Availability: Aug-2019

Software Availability: Sep-2020

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html>

http://www.spec.org/cpu2017/flags/Epsilon_platform_amd_RZ1_rome.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml>

http://www.spec.org/cpu2017/flags/Epsilon_platform_amd_RZ1_rome.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-20 13:40:51-0400.

Report generated on 2020-11-10 15:21:39 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.