



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL360 Gen10 Plus


(2.30 GHz, Intel Xeon Platinum 8380)

## SPECrate®2017\_int\_base = 557

## SPECrate®2017\_int\_peak = 581

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Jun-2021

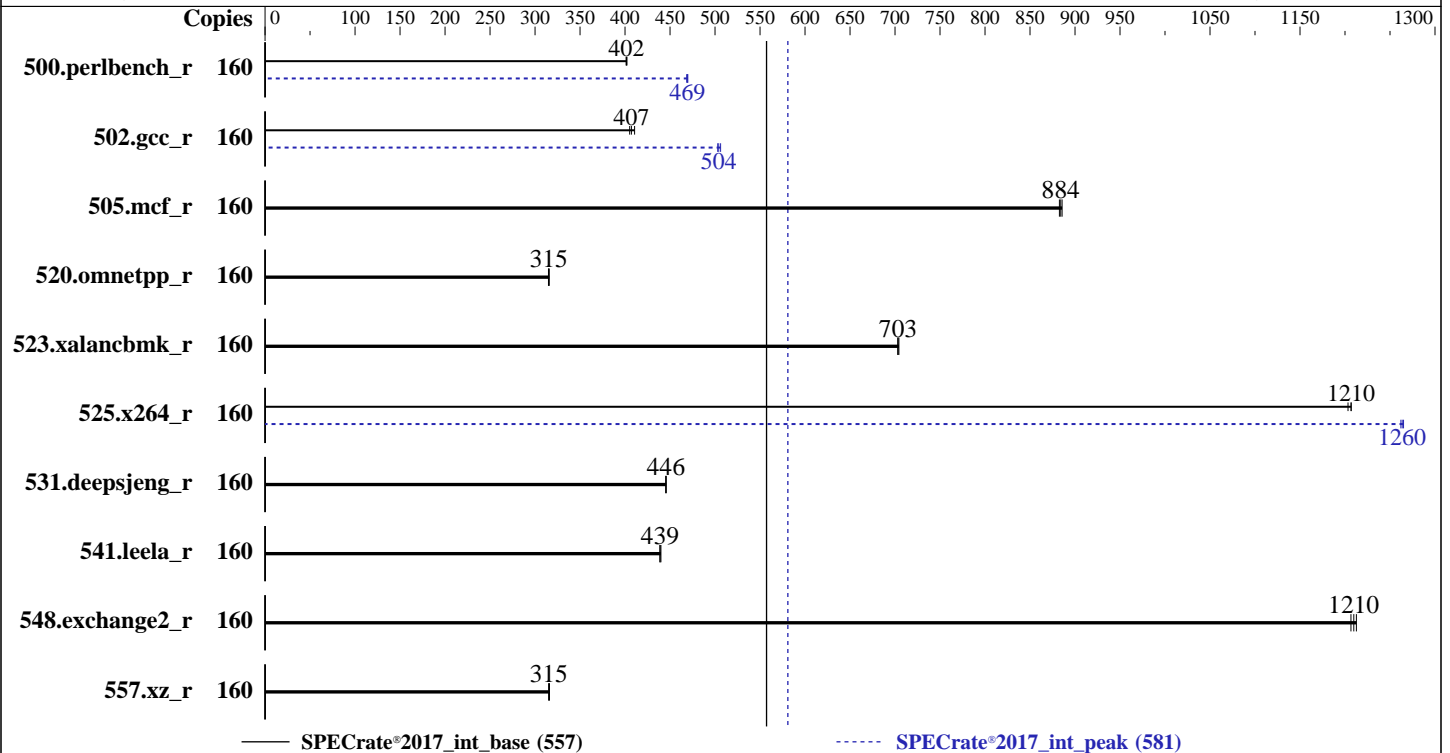

### Hardware

CPU Name: Intel Xeon Platinum 8380  
Max MHz: 3400  
Nominal: 2300  
Enabled: 80 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 800 GB SAS SSD, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
Kernel 4.18.0-240.el8.x86\_64  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
Parallel: No  
Firmware: HPE BIOS Version U46 v1.42 05/16/2021 released Jun-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 557

SPECrate®2017\_int\_peak = 581

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2021  
Hardware Availability: Jun-2021  
Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	635	401	633	402	<b>634</b>	<b>402</b>	160	<b>543</b>	<b>469</b>	542	470	544	468
502.gcc_r	160	<b>557</b>	<b>407</b>	552	411	559	405	160	448	506	<b>449</b>	<b>504</b>	450	503
505.mcf_r	160	293	883	292	886	<b>292</b>	<b>884</b>	160	293	883	292	886	<b>292</b>	<b>884</b>
520.omnetpp_r	160	<b>666</b>	<b>315</b>	667	315	665	316	160	<b>666</b>	<b>315</b>	667	315	665	316
523.xalancbmk_r	160	240	704	240	703	<b>240</b>	<b>703</b>	160	240	704	240	703	<b>240</b>	<b>703</b>
525.x264_r	160	232	1210	<b>232</b>	<b>1210</b>	233	1200	160	<b>222</b>	<b>1260</b>	221	1270	222	1260
531.deepsjeng_r	160	411	446	412	445	<b>412</b>	<b>446</b>	160	411	446	412	445	<b>412</b>	<b>446</b>
541.leela_r	160	<b>604</b>	<b>439</b>	602	440	604	439	160	<b>604</b>	<b>439</b>	602	440	604	439
548.exchange2_r	160	346	1210	<b>347</b>	<b>1210</b>	347	1210	160	346	1210	<b>347</b>	<b>1210</b>	347	1210
557.xz_r	160	548	315	<b>548</b>	<b>315</b>	547	316	160	548	315	<b>548</b>	<b>315</b>	547	316

SPECrate®2017\_int\_base = 557

SPECrate®2017\_int\_peak = 581

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Submitted\_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>

Submitted: Mon May 24 12:41:14 EDT 2021

Submission: cpu2017-20210524-26427.sub

Submitted\_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>

Submitted: Tue Jun 1 10:16:53 EDT 2021

Submission: cpu2017-20210524-26427.sub

## Platform Notes

The system ROM used for this result contains Intel microcode version 0xd0002a0 for the Intel Xeon Platinum 8380 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Advanced Memory Protection set to Advanced ECC

XPT Remote Prefetcher set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Intel UPI Link Frequency set to Minimum

Intel UPI Link Enablement set to Single Link

D2K set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Energy Efficient Turbo set to Enabled

Adjacent Sector Prefetch set to Disabled

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu May 20 11:55:15 2021

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz

2 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 40

siblings : 80

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 160

On-line CPU(s) list: 0-159

Thread(s) per core: 2

Core(s) per socket: 40

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 106

Model name: Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz

Stepping: 6

CPU MHz: 973.127

BogoMIPS: 4600.00

Virtualization: VT-x

L1d cache: 48K

L1i cache: 32K

L2 cache: 1280K

L3 cache: 61440K

NUMA node0 CPU(s): 0-19,80-99

NUMA node1 CPU(s): 20-39,100-119

NUMA node2 CPU(s): 40-59,120-139

NUMA node3 CPU(s): 60-79,140-159

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp

lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid

aperfmpperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes (Continued)

```

xtpr pdcn pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512v1 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 61440 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

```

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
88 89 90 91 92 93 94 95 96 97 98 99

```

node 0 size: 501065 MB

node 0 free: 515167 MB

```

node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119

```

node 1 size: 501054 MB

node 1 free: 515671 MB

```

node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139

```

node 2 size: 501212 MB

node 2 free: 515776 MB

```

node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159

```

node 3 size: 501226 MB

node 3 free: 515572 MB

node distances:

```

node 0 1 2 3

```

0: 10 20 30 30

1: 20 10 30 30

2: 30 30 10 20

3: 30 30 20 10

From /proc/meminfo

MemTotal: 2113465324 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.3"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.el8.x86\_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling):

Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 May 20 11:42

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel100-home	xf	670G	70G	600G	11%	/home

From /sys/devices/virtual/dmi/id

Vendor: HPE

Product: ProLiant DL360 Gen10 Plus

Product Family: ProLiant

Serial: CN701108CK

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200

BIOS:

BIOS Vendor: HPE  
BIOS Version: U46  
BIOS Date: 05/16/2021  
BIOS Revision: 1.42  
Firmware Revision: 2.40

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Portability Flags (Continued)

```
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL360 Gen10 Plus**

(2.30 GHz, Intel Xeon Platinum 8380)

**SPECrate®2017\_int\_base = 557**

**SPECrate®2017\_int\_peak = 581**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revC.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-20 02:25:15-0400.

Report generated on 2021-06-08 19:53:56 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.