



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Feb-2020

Software Availability: May-2021

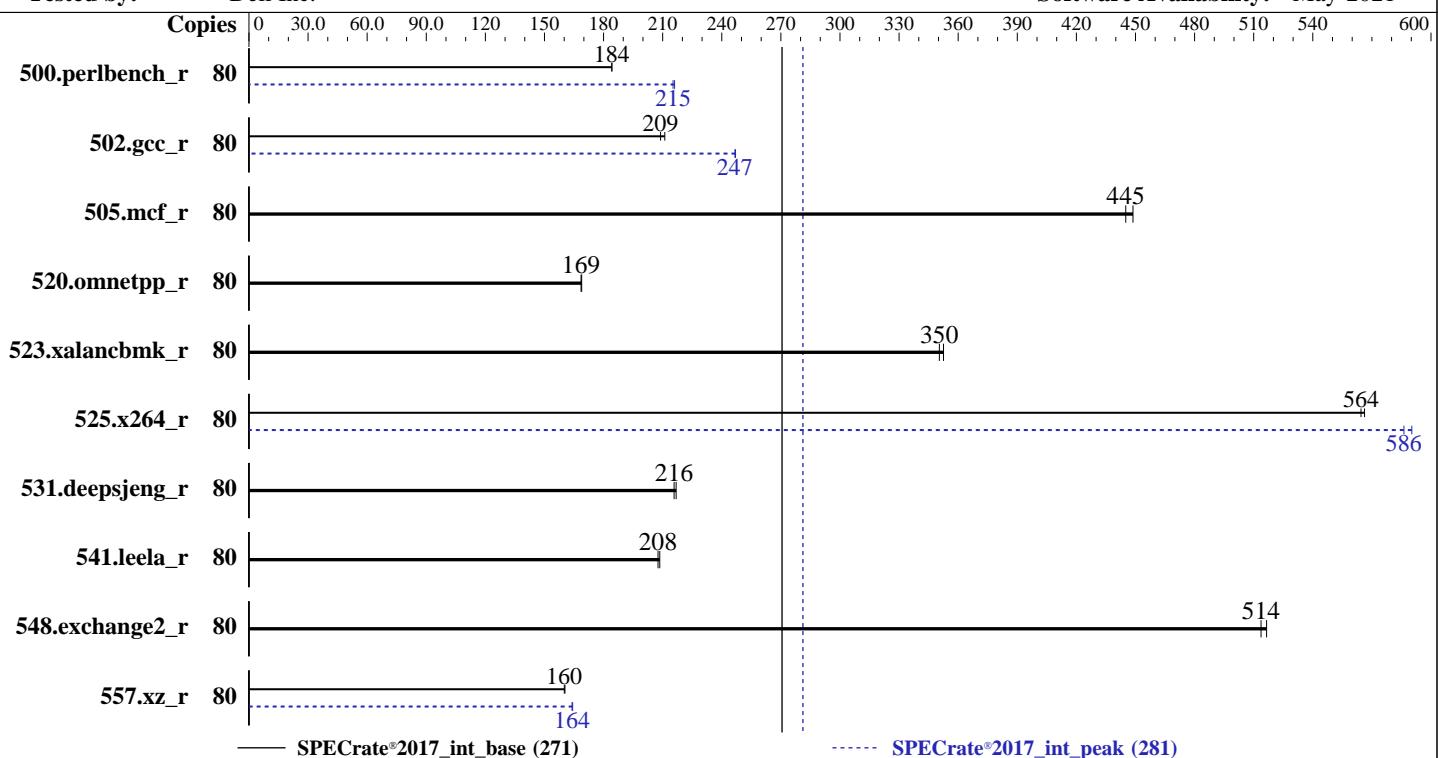

Hardware		Software	
CPU Name:	Intel Xeon Gold 6242R	OS:	Red Hat Enterprise Linux 8.4 (Ootpa)
Max MHz:	4100		4.18.0-305.el8.x86_64
Nominal:	3100	Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Enabled:	40 cores, 2 chips, 2 threads/core		Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Orderable:	1,2 chips		C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Cache L1:	32 KB I + 32 KB D on chip per core	Parallel:	No
L2:	1 MB I+D on chip per core	Firmware:	Version 2.12.2 released Jul-2021
L3:	35.75 MB I+D on chip per chip	File System:	tmpfs
Other:	None	System State:	Run level 3 (multi-user)
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)	Base Pointers:	64-bit
Storage:	125 GB on tmpfs	Peak Pointers:	32/64-bit
Other:	None	Other:	jemalloc memory allocator V5.0.1
		Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2021  
Hardware Availability: Feb-2020  
Software Availability: May-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	691	184	<b>691</b>	<b>184</b>			80	<b>592</b>	<b>215</b>	589	216				
502.gcc_r	80	<b>542</b>	<b>209</b>	537	211			80	<b>459</b>	<b>247</b>	459	247				
505.mcf_r	80	<b>290</b>	<b>445</b>	288	449			80	<b>290</b>	<b>445</b>	288	449				
520.omnetpp_r	80	<b>623</b>	<b>169</b>	621	169			80	<b>623</b>	<b>169</b>	621	169				
523.xalancbmk_r	80	<b>241</b>	<b>350</b>	240	353			80	<b>241</b>	<b>350</b>	240	353				
525.x264_r	80	247	566	<b>248</b>	<b>564</b>			80	237	590	<b>239</b>	<b>586</b>				
531.deepsjeng_r	80	<b>425</b>	<b>216</b>	423	217			80	<b>425</b>	<b>216</b>	423	217				
541.leela_r	80	635	209	<b>638</b>	<b>208</b>			80	635	209	<b>638</b>	<b>208</b>				
548.exchange2_r	80	<b>408</b>	<b>514</b>	406	517			80	<b>408</b>	<b>514</b>	406	517				
557.xz_r	80	<b>540</b>	<b>160</b>	539	160			80	<b>527</b>	<b>164</b>	526	164				

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.8-ic2021.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 271

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

SPECCrate®2017\_int\_peak = 281

CPU2017 License: 55

Test Date: Oct-2021

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: May-2021

## General Notes (Continued)

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering  
Virtualization Technology : Disabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
CPU Interconnect Bus Link  
Power Management : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2021.1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d  
running on localhost.localdomain Tue Oct 19 13:05:39 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6242R CPU @ 3.10GHz  
2 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 271

SPECCrate®2017\_int\_peak = 281

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2021  
Hardware Availability: Feb-2020  
Software Availability: May-2021

## Platform Notes (Continued)

```
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 4 5 6 8 9 10 11 12 13 16 17 18 19 21 26 28 29  
physical 1: cores 0 1 3 5 6 8 10 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu from util-linux 2.32.1:

```
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Byte Order:            Little Endian  
CPU(s):                80  
On-line CPU(s) list:  0-79  
Thread(s) per core:   2  
Core(s) per socket:   20  
Socket(s):             2  
NUMA node(s):          4  
Vendor ID:             GenuineIntel  
BIOS Vendor ID:       Intel  
CPU family:            6  
Model:                 85  
Model name:            Intel(R) Xeon(R) Gold 6242R CPU @ 3.10GHz  
BIOS Model name:      Intel(R) Xeon(R) Gold 6242R CPU @ 3.10GHz  
Stepping:               7  
CPU MHz:               3800.000  
CPU max MHz:          4100.0000  
CPU min MHz:          1200.0000  
BogoMIPS:              6200.00  
Virtualization:        VT-x  
L1d cache:             32K  
L1i cache:             32K  
L2 cache:              1024K  
L3 cache:              36608K  
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76  
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77  
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78  
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid  
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave  
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13  
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbbase tsc_adjust  
bmil hle avx2 smep bmi2 erms invpcid cqmp_mpx rdt_a avx512f avx512dq rdseed adx smap  
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves  
cqmq_llc cqmq_occup_llc cqmq_mbmm_total cqmq_mbmm_local dtherm ida arat pln pts pku ospke  
avx512_vnni md_clear flush_l1d arch_capabilities
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 271

SPECCrate®2017\_int\_peak = 281

CPU2017 License: 55

Test Date: Oct-2021

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: May-2021

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76

node 0 size: 95303 MB

node 0 free: 94813 MB

node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77

node 1 size: 96763 MB

node 1 free: 96603 MB

node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78

node 2 size: 96763 MB

node 2 free: 87315 MB

node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79

node 3 size: 96725 MB

node 3 free: 96566 MB

node distances:

node 0 1 2 3

0: 10 21 11 21

1: 21 10 21 11

2: 11 21 10 21

3: 21 11 21 10

From /proc/meminfo

MemTotal: 394810052 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has
performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.4 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.4"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"

ANSI\_COLOR="0;31"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

CPU2017 License: 55

Test Date: Oct-2021

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: May-2021

## Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Mitigation: Split huge pages

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: usercopy/swaps
barriers and \_\_user pointer
sanitization

CVE-2017-5753 (Spectre variant 1):

Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling

CVE-2017-5715 (Spectre variant 2):

Mitigation: TSX disabled

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

run-level 3 Oct 19 13:01

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	4.4G	121G	4%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge M640
Product Family:	PowerEdge

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x	00AD00B300AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933
4x	00AD063200AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933
3x	00AD069D00AD	HMA84GR7CJR4N-WM	32 GB	2	rank	2933

BIOS:

BIOS Vendor:	Dell Inc.
--------------	-----------

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_int\_base = 271

SPECCrate®2017\_int\_peak = 281

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

CPU2017 License: 55

Test Date: Oct-2021

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: May-2021

## Platform Notes (Continued)

BIOS Version: 2.12.2  
BIOS Date: 07/12/2021  
BIOS Revision: 2.12

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
 2021.1 Build 20201113
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

SPECCrate®2017\_int\_base = 271

SPECCrate®2017\_int\_peak = 281

CPU2017 License: 55

Test Date: Oct-2021

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: May-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(peak) 557.xz_r(peak)
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 502.gcc_r(peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
```

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2021  
Hardware Availability: Feb-2020  
Software Availability: May-2021

## Compiler Version Notes (Continued)

Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-floop-math=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbundles-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 271

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

SPECrate®2017\_int\_peak = 281

---

CPU2017 License: 55

**Test Date:** Oct-2021

**Test Sponsor:** Dell Inc.

## **Hardware Availability:** Feb-2020

**Tested by:** Dell Inc.

**Software Availability:** May-2021

## Base Optimization Flags (Continued)

## C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lgkmalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lgkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

## 500.perlbench\_r: icc

557.xz\_r: icc

## C++ benchmarks:

icpx

## Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

Test Date: Oct-2021

Hardware Availability: Feb-2020

Software Availability: May-2021

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M640 (Intel Xeon Gold 6242R, 3.10 GHz)

SPECrate®2017\_int\_base = 271

SPECrate®2017\_int\_peak = 281

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Feb-2020

Software Availability: May-2021

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-19 13:05:39-0400.

Report generated on 2021-11-10 10:11:32 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-09.