



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

**SPECrate®2017\_int\_base = 449**

**SPECrate®2017\_int\_peak = 466**

CPU2017 License: 9016


Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

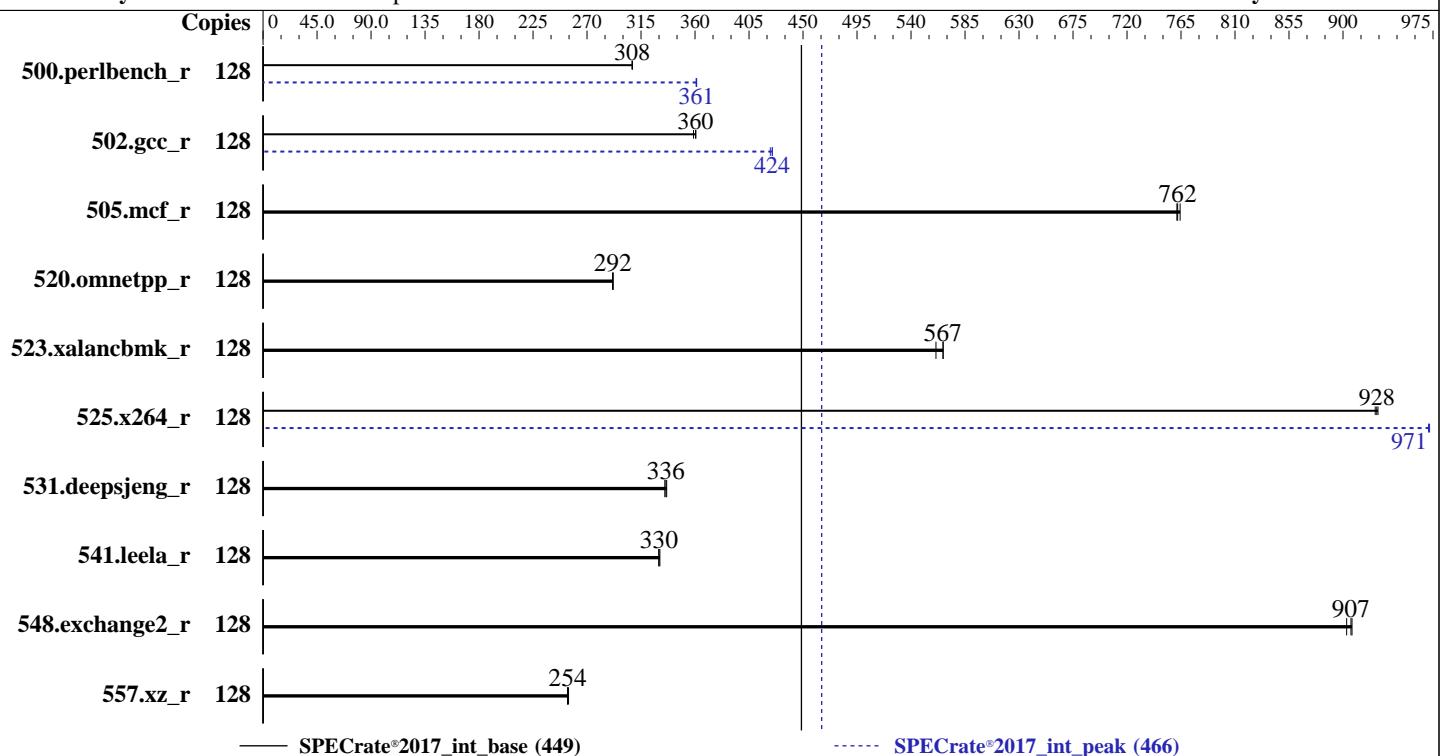

### Hardware

CPU Name: Intel Xeon Platinum 8352M  
Max MHz: 3500  
Nominal: 2300  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 48 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 4 TB PCIE NVME SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)  
4.18.0-240.22.1.el8\_3.x86\_64  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler  
Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler  
Classic Build 20201112 for Linux  
Parallel: No  
Firmware: Version 0504 released May-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

**SPECrate®2017\_int\_base = 449**

**SPECrate®2017\_int\_peak = 466**

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	662	308	<b>662</b>	<b>308</b>	662	308	128	564	361	565	361	<b>564</b>	<b>361</b>		
502.gcc_r	128	503	361	505	359	<b>503</b>	<b>360</b>	128	429	423	<b>427</b>	<b>424</b>	427	424		
505.mcf_r	128	272	762	<b>271</b>	<b>762</b>	271	764	128	272	762	<b>271</b>	<b>762</b>	271	764		
520.omnetpp_r	128	576	291	576	292	<b>576</b>	<b>292</b>	128	576	291	576	292	<b>576</b>	<b>292</b>		
523.xalancbmk_r	128	241	561	238	567	<b>239</b>	<b>567</b>	128	241	561	238	567	<b>239</b>	<b>567</b>		
525.x264_r	128	241	929	<b>241</b>	<b>928</b>	242	927	128	231	972	<b>231</b>	<b>971</b>	231	971		
531.deepsjeng_r	128	<b>437</b>	<b>336</b>	438	335	436	336	128	<b>437</b>	<b>336</b>	438	335	436	336		
541.leela_r	128	<b>642</b>	<b>330</b>	641	331	643	330	128	<b>642</b>	<b>330</b>	641	331	643	330		
548.exchange2_r	128	371	903	<b>370</b>	<b>907</b>	370	908	128	371	903	<b>370</b>	<b>907</b>	370	908		
557.xz_r	128	<b>544</b>	<b>254</b>	545	254	543	255	128	<b>544</b>	<b>254</b>	545	254	543	255		

**SPECrate®2017\_int\_base = 449**

**SPECrate®2017\_int\_peak = 466**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu118/lib/intel64:/home/cpu118/lib/ia32:/home/cpu118/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC2 (2-clusters)

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /home/cpu118/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d  
running on localhost.localdomain Wed Oct 20 21:13:07 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8352M CPU @ 2.30GHz
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 32  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Platinum 8352M CPU @ 2.30GHz  
Stepping: 6  
CPU MHz: 2800.000  
CPU max MHz: 3500.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4600.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 49152K  
NUMA node0 CPU(s): 0-15,64-79  
NUMA node1 CPU(s): 16-31,80-95  
NUMA node2 CPU(s): 32-47,96-111  
NUMA node3 CPU(s): 48-63,112-127  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperfmpf perf\_pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpocntdq la57 rdpid md\_clear pconfig flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 49152 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79
node 0 size: 250439 MB
node 0 free: 256762 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 252662 MB
node 1 free: 257213 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 250951 MB
node 2 free: 257105 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 250888 MB
node 3 free: 257082 MB
node distances:
node   0   1   2   3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10
```

```
From /proc/meminfo
MemTotal:      1056462036 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-240.22.1.el8_3.x86_64 #1 SMP Thu Mar 25 14:36:04
EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Oct 20 13:20

SPEC is set to: /home/cpul18

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	3.6T	30G	3.6T	1%	/home

From /sys/devices/virtual/dmi/id

```
Vendor: ASUSTeK COMPUTER INC.
Product: RS700-E10-RS12U
Product Family: Server
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
16x NO DIMM NO DIMM
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200
```

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0504
BIOS Date:	05/26/2021
BIOS Revision:	5.4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

=====

C | 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version  
2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version  
2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version  
2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2021

Hardware Availability: May-2021

Software Availability: Mar-2021

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTeKPlatform-Settings-z12-V1.0.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System  
(2.30 GHz, Intel Xeon Platinum 8352M)

SPECrate®2017\_int\_base = 449

SPECrate®2017\_int\_peak = 466

CPU2017 License: 9016

Test Date: Oct-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.0.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-20 21:13:07-0400.

Report generated on 2021-11-24 11:15:21 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-23.