



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

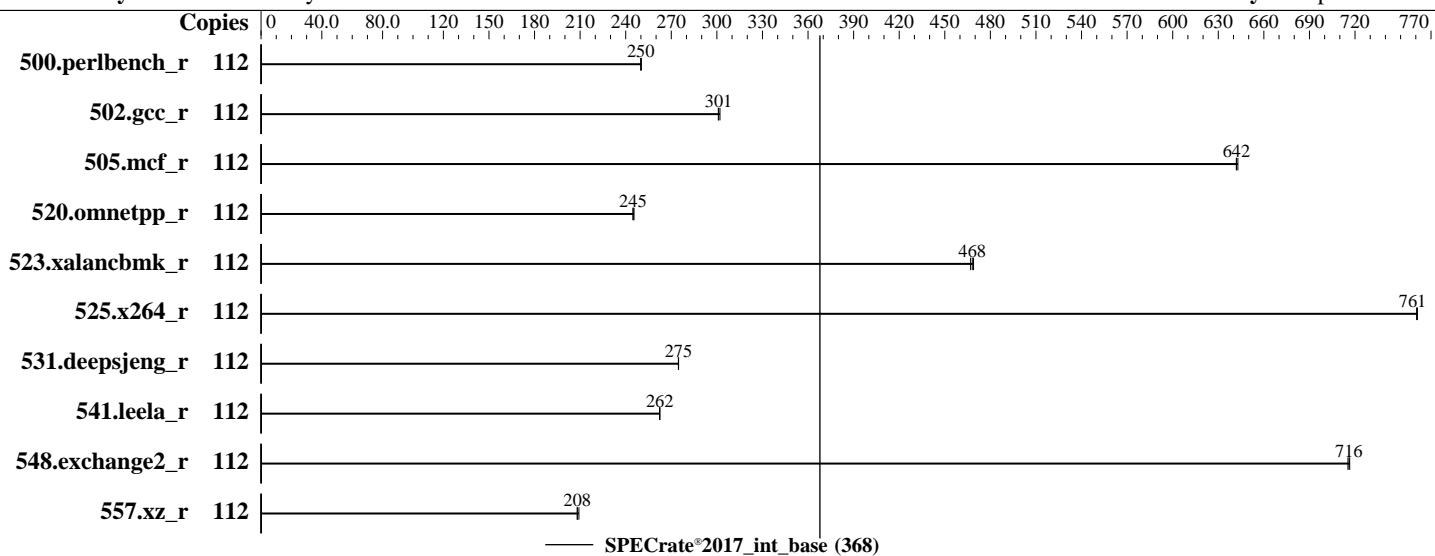

Hardware

CPU Name: Intel Xeon Gold 6330
 Max MHz: 3100
 Nominal: 2000
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 42 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
 Storage: 1 x 240 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 5.3.18-22-default
 Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;
 Fortran: Version 2021.4.0 of Intel Fortran Compiler
 Classic Build 20210910 for Linux;
 Parallel: No
 Firmware: Version 5.0.1d released Aug-2021
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	713	250	712	250	713	250									
502.gcc_r	112	527	301	525	302	527	301									
505.mcf_r	112	282	643	282	642	282	642									
520.omnetpp_r	112	600	245	599	245	600	245									
523.xalancbmk_r	112	253	468	253	467	252	469									
525.x264_r	112	258	761	258	761	258	761									
531.deepsjeng_r	112	467	275	467	275	467	275									
541.leela_r	112	707	262	707	262	707	262									
548.exchange2_r	112	410	715	410	716	410	716									
557.xz_r	112	581	208	578	209	581	208									

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/intel/tbb/2021.4.0/env/../lib/intel64/gcc4.8:/home/intel/mpi/2021
  .4.0//libfabric/lib:/home/intel/mpi/2021.4.0//lib/release:/home/intel/mp
  i/2021.4.0//lib:/home/intel/compiler/2021.4.0/linux/compiler/lib/intel64
  _lin:/home/intel/compiler/2021.4.0/linux/lib:/home/intel/clck/2021.4.0/l
  ib/intel64:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2

Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Sep-2021

Tested by: Cisco Systems

Software Availability: Sep-2021

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Disabled

DCU Streamer Prefetch set to Disabled

Sub NUMA Clustering set to Enabled

LLC Dead Line set to Disabled

Memory Refresh Rate set to 1x Refresh

ADDDC Sparing set to Disabled

Patrol Scrub set to Disabled

Processor C6 Report set to Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d  
running on perf-blade3 Thu Nov 18 09:36:43 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz  
 2 "physical id"s (chips)  
 112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
  cpu cores : 28  
  siblings : 56  
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
  25 26 27  
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
  25 26 27
```

From lscpu from util-linux 2.33.1:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Sep-2021

Tested by: Cisco Systems

Software Availability: Sep-2021

Platform Notes (Continued)

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 46 bits physical, 57 bits virtual
CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping: 6
CPU MHz: 2052.272
CPU max MHz: 3100.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 43008K
NUMA node0 CPU(s): 0-13,56-69
NUMA node1 CPU(s): 14-27,70-83
NUMA node2 CPU(s): 28-41,84-97
NUMA node3 CPU(s): 42-55,98-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 43008 KB

From numactl --hardware

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Sep-2021

Tested by: Cisco Systems

Software Availability: Sep-2021

Platform Notes (Continued)

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 56 57 58 59 60 61 62 63 64 65 66 67 68 69
node 0 size: 515649 MB
node 0 free: 515051 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 1 size: 516088 MB
node 1 free: 515686 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 84 85 86 87 88 89 90 91 92 93 94
95 96 97
node 2 size: 516088 MB
node 2 free: 515748 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 516085 MB
node 3 free: 515690 MB
node distances:
node   0   1   2   3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10
```

From /proc/meminfo

```
MemTotal:      2113446788 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux perf-blade3 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aebe)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Sep-2021

Tested by: Cisco Systems

Software Availability: Sep-2021

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 17 16:26

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	222G	54G	167G	25%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSX-210C-M6
Serial:	FCH25057ALS

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x 0xCE00 M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	X210M6.5.0.1d.0.0816211754
BIOS Date:	08/16/2021
BIOS Revision:	5.22

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
| 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Sep-2021

Tested by: Cisco Systems

Software Availability: Sep-2021

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.html
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-rev1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.2021-12-22.xml
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-ICX-rev1.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M6 (Intel Xeon Gold 6330,
2.00GHz)

SPECrate®2017_int_base = 368

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Sep-2021

Software Availability: Sep-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-18 12:36:42-0500.

Report generated on 2022-02-04 12:38:12 by CPU2017 PDF formatter v6442.

Originally published on 2022-02-04.