



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

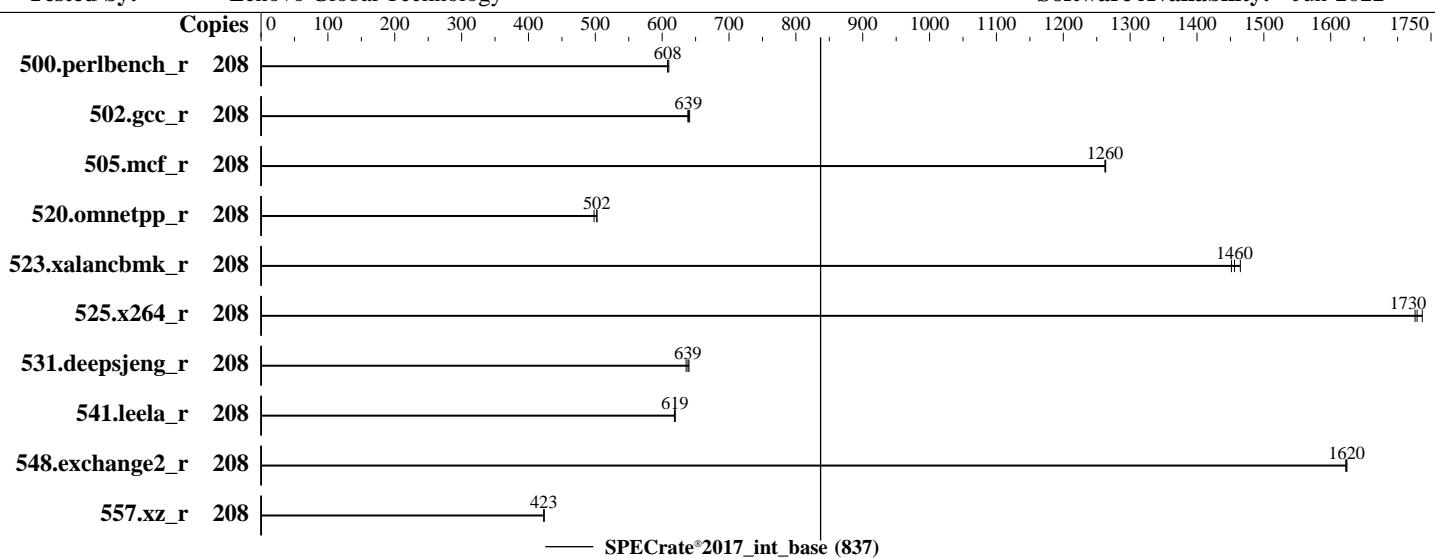

Hardware

CPU Name: Intel Xeon Platinum 8470
Max MHz: 3800
Nominal: 2000
Enabled: 104 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version ESE109L 1.10 released Jan-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	543	610	544	608	545	608									
502.gcc_r	208	461	639	459	641	461	638									
505.mcf_r	208	266	1260	266	1260	266	1260									
520.omnetpp_r	208	543	502	548	498	543	502									
523.xalancbmk_r	208	151	1460	151	1450	150	1460									
525.x264_r	208	210	1740	211	1730	211	1730									
531.deepsjeng_r	208	375	636	372	640	373	639									
541.leela_r	208	556	619	556	619	557	618									
548.exchange2_r	208	336	1620	336	1620	336	1620									
557.xz_r	208	531	423	531	423	531	423									

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.8-ic2022.1/lib/intel64:/home/cpu2017-1.1.8-ic2022.1/lib/ia32:/home/cpu2017-1.1.8-ic
  2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

MONITOR/MWAIT set to Enabled

SNC set to SNC4

LLC Prefetch set to Disabled

UPI Link Disable set to Disabled 1 Link

```
Sysinfo program /home/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Wed Jan 11 21:32:58 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8470
 2 "physical id"s (chips)
 208 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 52
  siblings : 104
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	208
On-line CPU(s) list:	0-207
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8470
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	52
Socket(s):	2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

```

Stepping: 8
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
      umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd
      fсрm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d
      arch_capabilities
Virtualization: VT-x
L1d cache: 4.9 MiB (104 instances)
L1i cache: 3.3 MiB (104 instances)
L2 cache: 208 MiB (104 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-12,104-116
NUMA node1 CPU(s): 13-25,117-129
NUMA node2 CPU(s): 26-38,130-142
NUMA node3 CPU(s): 39-51,143-155
NUMA node4 CPU(s): 52-64,156-168
NUMA node5 CPU(s): 65-77,169-181
NUMA node6 CPU(s): 78-90,182-194
NUMA node7 CPU(s): 91-103,195-207
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

/proc/cpuinfo cache data
cache size : 107520 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 104 105 106 107 108 109 110 111 112 113 114
115 116

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

```
node 0 size: 64169 MB
node 0 free: 63560 MB
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 117 118 119 120 121 122 123 124 125
126 127 128 129
node 1 size: 64505 MB
node 1 free: 64308 MB
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 130 131 132 133 134 135 136 137 138
139 140 141 142
node 2 size: 64505 MB
node 2 free: 64244 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 143 144 145 146 147 148 149 150 151
152 153 154 155
node 3 size: 64470 MB
node 3 free: 64260 MB
node 4 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 156 157 158 159 160 161 162 163 164
165 166 167 168
node 4 size: 64505 MB
node 4 free: 64282 MB
node 5 cpus: 65 66 67 68 69 70 71 72 73 74 75 76 77 169 170 171 172 173 174 175 176 177
178 179 180 181
node 5 size: 64505 MB
node 5 free: 64071 MB
node 6 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 182 183 184 185 186 187 188 189 190
191 192 193 194
node 6 size: 64505 MB
node 6 free: 64285 MB
node 7 cpus: 91 92 93 94 95 96 97 98 99 100 101 102 103 195 196 197 198 199 200 201 202
203 204 205 206 207
node 7 size: 64458 MB
node 7 free: 64112 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 21 21 21 21
1: 12 10 12 12 21 21 21 21
2: 12 12 10 12 21 21 21 21
3: 12 12 12 10 21 21 21 21
4: 21 21 21 21 10 12 12 12
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 10 10
```

```
From /proc/meminfo
MemTotal:      528000872 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
```

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jan 11 21:15

SPEC is set to: /home/cpu2017-1.1.8-ic2022.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	446G	29G	418G	7%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Samsung M321R4GA3BB0-CQKEG	32 GB	2 rank	4800
7x Samsung M321R4GA3BB0-CQKVG	32 GB	2 rank	4800

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	ESE109L-1.10
BIOS Date:	01/07/2023
BIOS Revision:	1.10
Firmware Revision:	1.0

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -fno-optimize-sibling-calls
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8470)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html>
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-11 08:32:57-0500.

Report generated on 2024-01-29 17:20:12 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.