



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

**SPECrate®2017\_fp\_base = 953**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 19


**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Jan-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Jun-2022

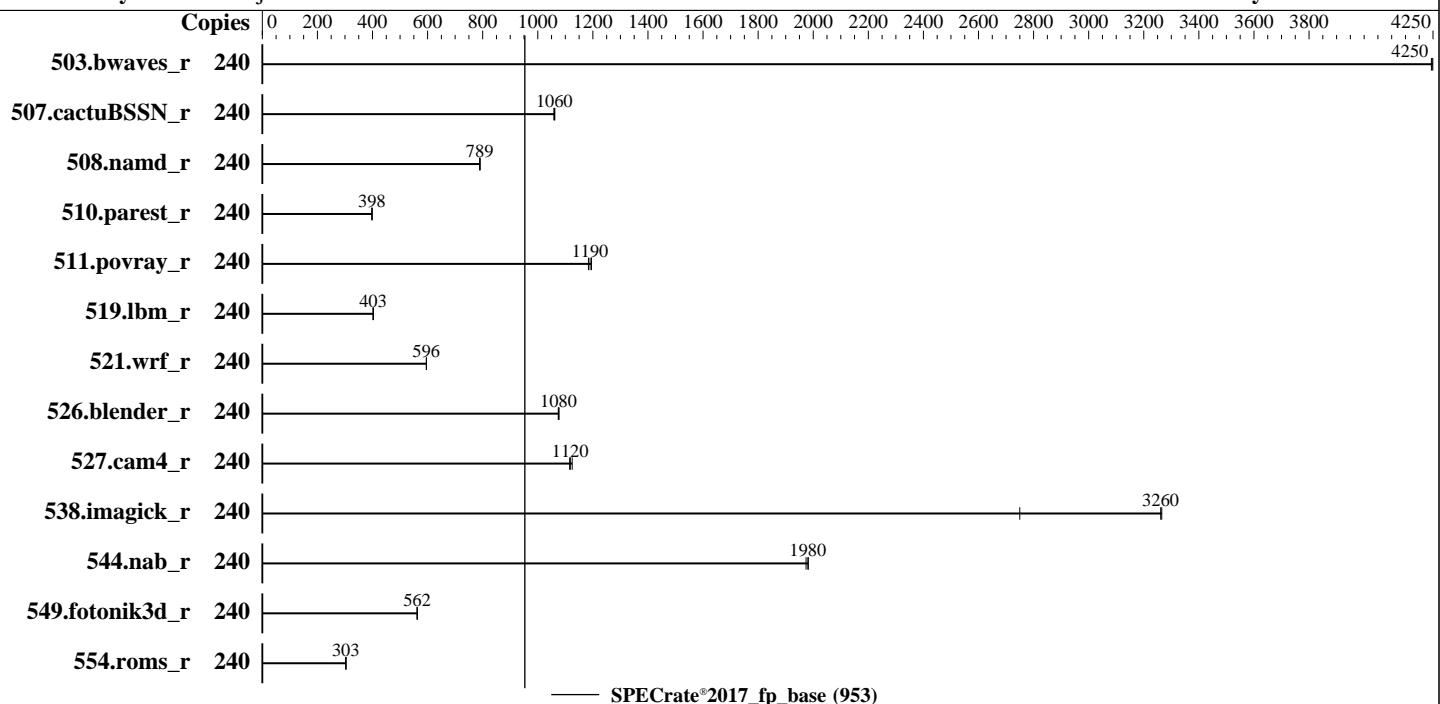

SPECrate®2017\_fp\_base (953)

## Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 120 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x SATA SSD, 1.92TB  
Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3983-A1x. Released Mar-2023 tested as V1.0.0.0 R0.22.1 for D3983-A1x Jan-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

**SPECrate®2017\_fp\_base = 953**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Jun-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	567	4240	566	4250	<b>567</b>	<b>4250</b>							
507.cactusBSSN_r	240	<b>286</b>	<b>1060</b>	287	1060	286	1060							
508.namd_r	240	<b>289</b>	<b>789</b>	289	789	288	791							
510.parest_r	240	1579	398	<b>1577</b>	<b>398</b>	1574	399							
511.povray_r	240	473	1180	<b>471</b>	<b>1190</b>	469	1190							
519.lbm_r	240	<b>628</b>	<b>403</b>	628	403	628	403							
521.wrf_r	240	<b>903</b>	<b>596</b>	903	596	902	596							
526.blender_r	240	<b>340</b>	<b>1080</b>	340	1070	339	1080							
527.cam4_r	240	376	1120	<b>375</b>	<b>1120</b>	373	1120							
538.imagick_r	240	217	2750	<b>183</b>	<b>3260</b>	183	3270							
544.nab_r	240	204	1980	205	1970	<b>204</b>	<b>1980</b>							
549.fotonik3d_r	240	<b>1663</b>	<b>562</b>	1663	563	1664	562							
554.roms_r	240	1256	304	1258	303	<b>1257</b>	<b>303</b>							

**SPECrate®2017\_fp\_base = 953**

**SPECrate®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

```
  "/home/Benchmark/speccpu-1.1.8/lib/intel64:/home/Benchmark/speccpu-1.1.8
   /je5.0.1-64"
```

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Jun-2022

## General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Package C State limit = C0

CPU Performance Boost = Aggressive

SNC (Sub NUMA) = Enable SNC4

FAN Control = Full

Sysinfo program /home/Benchmark/speccpu-1.1.8/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost Wed Jan 4 07:36:49 2023

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8490H
```

```
 2 "physical id"s (chips)
```

```
 240 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
  cpu cores : 60
```

```
  siblings : 120
```

```
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
 53 54 55 56 57 58 59
```

```
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
 53 54 55 56 57 58 59
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Jan-2023

Test Sponsor: Fujitsu

Hardware Availability: Mar-2023

Tested by: Fujitsu

Software Availability: Jun-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	240
On-line CPU(s) list:	0-239
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	60
Socket(s):	2
Stepping:	8
CPU max MHz:	3500.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmand fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	5.6 MiB (120 instances)
L1i cache:	3.8 MiB (120 instances)
L2 cache:	240 MiB (120 instances)
L3 cache:	225 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-14,120-134
NUMA node1 CPU(s):	15-29,135-149
NUMA node2 CPU(s):	30-44,150-164
NUMA node3 CPU(s):	45-59,165-179
NUMA node4 CPU(s):	60-74,180-194
NUMA node5 CPU(s):	75-89,195-209
NUMA node6 CPU(s):	90-104,210-224

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

**SPECrate®2017\_fp\_base = 953**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 19

**Test Date:** Jan-2023

**Test Sponsor:** Fujitsu

**Hardware Availability:** Mar-2023

**Tested by:** Fujitsu

**Software Availability:** Jun-2022

## Platform Notes (Continued)

NUMA node7 CPU(s):	105-119,225-239
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data  
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134
node 0 size: 128562 MB
node 0 free: 127674 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
142 143 144 145 146 147 148 149
node 1 size: 129016 MB
node 1 free: 128642 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164
node 2 size: 129016 MB
node 2 free: 128652 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
172 173 174 175 176 177 178 179
node 3 size: 129016 MB
node 3 free: 128617 MB
node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194
node 4 size: 129016 MB
node 4 free: 128603 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Jan-2023

Test Sponsor: Fujitsu

Hardware Availability: Mar-2023

Tested by: Fujitsu

Software Availability: Jun-2022

## Platform Notes (Continued)

```
node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201  
202 203 204 205 206 207 208 209  
node 5 size: 129016 MB  
node 5 free: 128438 MB  
node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215  
216 217 218 219 220 221 222 223 224  
node 6 size: 129016 MB  
node 6 free: 128590 MB  
node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227  
228 229 230 231 232 233 234 235 236 237 238 239  
node 7 size: 128647 MB  
node 7 free: 128018 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 12 12 12 21 21 21 21  
1: 12 10 12 12 21 21 21 21  
2: 12 12 10 12 21 21 21 21  
3: 12 12 12 10 21 21 21 21  
4: 21 21 21 21 10 12 12 12  
5: 21 21 21 21 12 10 12 12  
6: 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10
```

From /proc/meminfo

```
MemTotal: 1056059684 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
powersave

From /etc/\*release\* /etc/\*version\*

```
os-release:  
NAME="SLES"  
VERSION="15-SP4"  
VERSION_ID="15.4"  
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"  
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

uname -a:

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18  
UTC 2022 (49db222/lp) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Jan-2023

Test Sponsor: Fujitsu

Hardware Availability: Mar-2023

Tested by: Fujitsu

Software Availability: Jun-2022

## Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jan 4 07:35

SPEC is set to: /home/Benchmark/speccpu-1.1.8

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	1.8T	76G	1.7T	5%	/

From /sys/devices/virtual/dmi/id

Vendor:	FUJITSU
Product:	PRIMERGY RX2540 M7
Product Family:	SERVER
Serial:	EWCExxxxxx

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x Samsung M321R8GA0BB0-CQKDG	64 GB	2 rank	4800
6x Samsung M321R8GA0BB0-CQKVG	64 GB	2 rank	4800

BIOS:

BIOS Vendor:	FUJITSU
BIOS Version:	V1.0.0.0 R0.22.1 for D3983-A1x
BIOS Date:	12/01/2022
BIOS Revision:	0.22
Firmware Revision:	2.0

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Jun-2022

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

```
=====
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
```

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
```

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2023

Hardware Availability: Mar-2023

Software Availability: Jun-2022

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H,  
1.90GHz

SPECrate®2017\_fp\_base = 953

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Jan-2023

Test Sponsor: Fujitsu

Hardware Availability: Mar-2023

Tested by: Fujitsu

Software Availability: Jun-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-03 17:36:48-0500.

Report generated on 2023-02-01 18:28:10 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.