



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11


(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

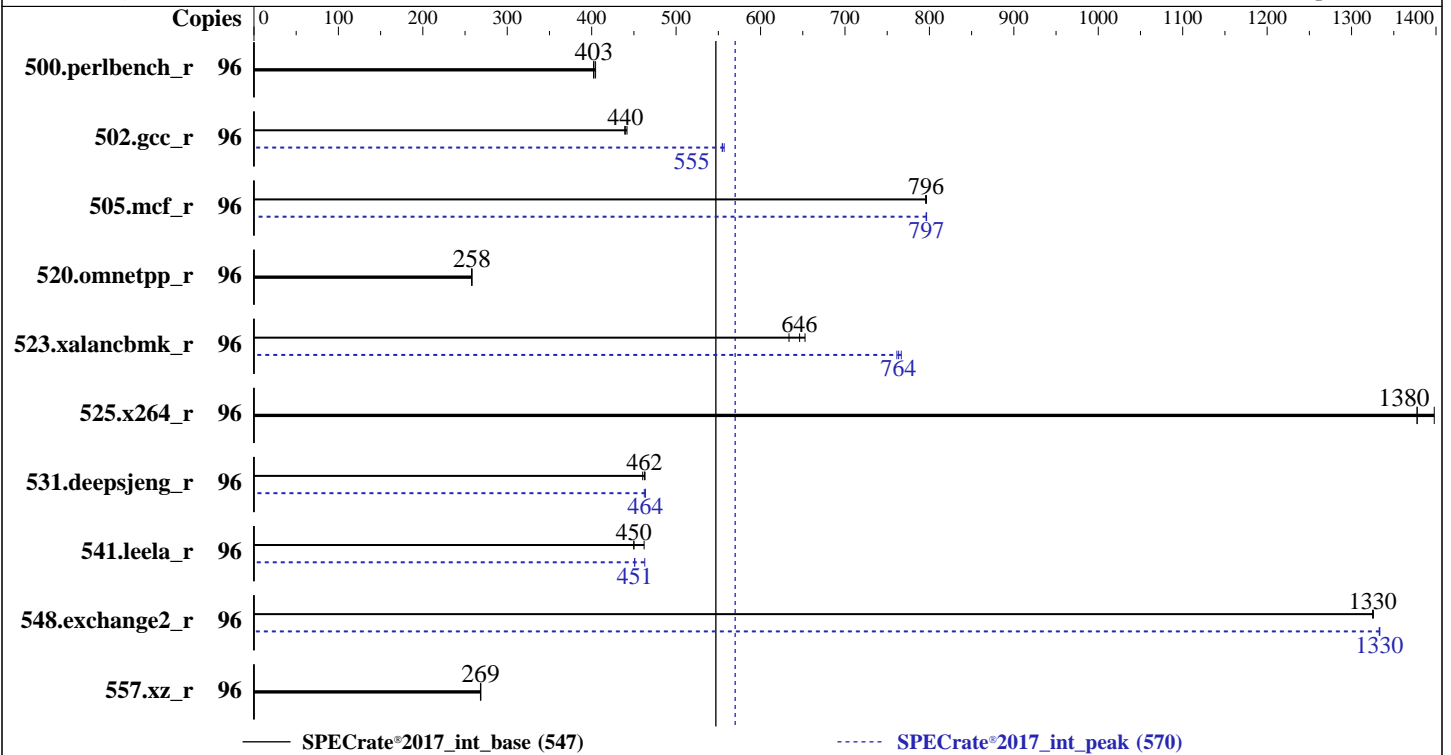

Hardware

CPU Name: AMD EPYC 9474F
 Max MHz: 4100
 Nominal: 3600
 Enabled: 48 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version v1.42 08/16/2023 released
 Aug-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	380	402	378	405	379	403	96	380	402	378	405	379	403
502.gcc_r	96	310	439	309	440	308	442	96	245	555	244	557	245	555
505.mcf_r	96	195	796	195	796	195	796	96	195	797	195	797	195	796
520.omnetpp_r	96	488	258	488	258	489	258	96	488	258	488	258	489	258
523.xalancbmk_r	96	157	646	160	634	155	653	96	133	764	132	767	133	761
525.x264_r	96	120	1400	122	1380	122	1380	96	120	1400	122	1380	122	1380
531.deepsjeng_r	96	239	460	238	462	238	463	96	237	464	237	464	238	462
541.leela_r	96	344	462	353	450	353	450	96	343	463	353	451	352	451
548.exchange2_r	96	190	1330	190	1330	190	1330	96	189	1330	189	1330	189	1330
557.xz_r	96	386	269	387	268	386	269	96	386	269	387	268	386	269

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2023

Hardware Availability: Aug-2023

Software Availability: Apr-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

The system ROM used for this result contains microcode version 0xaa00212 for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.8

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Sun Oct 1 22:22:49 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
22:22:49 up 1 min, 2 users, load average: 4.44, 2.19, 0.82
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 22:22 46.00s 0.00s 0.00s -bash
root pts/0 22:22 9.00s 0.81s 0.03s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094747
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3094747
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.019/templogs/preenv.intrate.019.0.log --lognum 019.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9474F 48-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa10113e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 48
siblings        : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0:  apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             96
On-line CPU(s) list: 0-95
Vendor ID:          AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:         AMD EPYC 9474F 48-Core Processor
BIOS Model name:   AMD EPYC 9474F 48-Core Processor
CPU family:         25
Model:              17
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s):          1
Stepping:           1
BogoMIPS:           7188.93
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                   xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                   misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                   perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
                   hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                   erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                   clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavec xgetbv1
                   xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16
                   clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock
                   nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                   pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
                   ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                   avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```

Virtualization:          AMD-V
L1d cache:              1.5 MiB (48 instances)
L1i cache:              1.5 MiB (48 instances)
L2 cache:               48 MiB (48 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):          8
NUMA node0 CPU(s):     0-5,48-53
NUMA node1 CPU(s):     6-11,54-59
NUMA node2 CPU(s):     12-17,60-65
NUMA node3 CPU(s):     18-23,66-71
NUMA node4 CPU(s):     24-29,72-77
NUMA node5 CPU(s):     30-35,78-83
NUMA node6 CPU(s):     36-41,84-89
NUMA node7 CPU(s):     42-47,90-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 96518 MB
node 0 free: 95908 MB
node 1 cpus: 6-11,54-59
node 1 size: 96765 MB
node 1 free: 96389 MB
node 2 cpus: 12-17,60-65
node 2 size: 96765 MB
node 2 free: 96491 MB
node 3 cpus: 18-23,66-71
node 3 size: 96728 MB
node 3 free: 96449 MB
node 4 cpus: 24-29,72-77
node 4 size: 96765 MB
node 4 free: 96507 MB
node 5 cpus: 30-35,78-83
node 5 size: 96765 MB
node 5 free: 96472 MB
node 6 cpus: 36-41,84-89
node 6 size: 96765 MB
node 6 free: 96456 MB
node 7 cpus: 42-47,90-95
node 7 size: 96716 MB
node 7 free: 96401 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 12 12 12 12 12 12
1:  11 10 12 12 12 12 12 12
2:  12 12 10 11 12 12 12 12
3:  12 12 11 10 12 12 12 12
4:  12 12 12 12 10 11 12 12
5:  12 12 12 12 11 10 12 12
6:  12 12 12 12 12 12 10 11
7:  12 12 12 12 12 12 11 10
```

```
-----
9. /proc/meminfo
   MemTotal:      792362200 kB
```

```
-----
10. who -r
    run-level 3 Oct 1 22:21
```

```
-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target  Status
    multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                  dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                  nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                  systemd-network-generator tuned udisks2 upower
    enabled-runtime  systemd-remount-fs
    disabled        blk-availability canberra-system-bootup canberra-system-shutdown
                  canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
                  hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm
                  rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                  systemd-pstore systemd-sysex
    indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd2,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
    Unable to determine current policy
    boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3600MHz
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2023

Hardware Availability: Aug-2023

Software Availability: Apr-2023

Platform Notes (Continued)

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1

```

17. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

20. Disk information

SPEC is set to: /home/cpu2017

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      372G  15G  357G   4% /home

```

21. /sys/devices/virtual/dmi/id

```

Vendor:      HPE
Product:     ProLiant DL325 Gen11
Product Family: ProLiant

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Platform Notes (Continued)

Serial: DL325GEN11-002

22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

11x Hynix HMC94AEBRA103N 64 GB 2 rank 4800
1x Hynix HMC94MEBRA121N 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.42
BIOS Date: 08/16/2023
BIOS Revision: 1.42
Firmware Revision: 1.40

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2023

Hardware Availability: Aug-2023

Software Availability: Apr-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2023
Hardware Availability: Aug-2023
Software Availability: Apr-2023

Peak Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2023

Hardware Availability: Aug-2023

Software Availability: Apr-2023

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECrate®2017_int_base = 547

SPECrate®2017_int_peak = 570

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2023

Hardware Availability: Aug-2023

Software Availability: Apr-2023

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-01 12:52:49-0400.

Report generated on 2023-10-25 10:36:31 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.