



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL320 Gen11


( 2.90 GHz, Intel Xeon Gold 6542Y )

## SPECrate®2017\_int\_base = 261

## SPECrate®2017\_int\_peak = 269

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

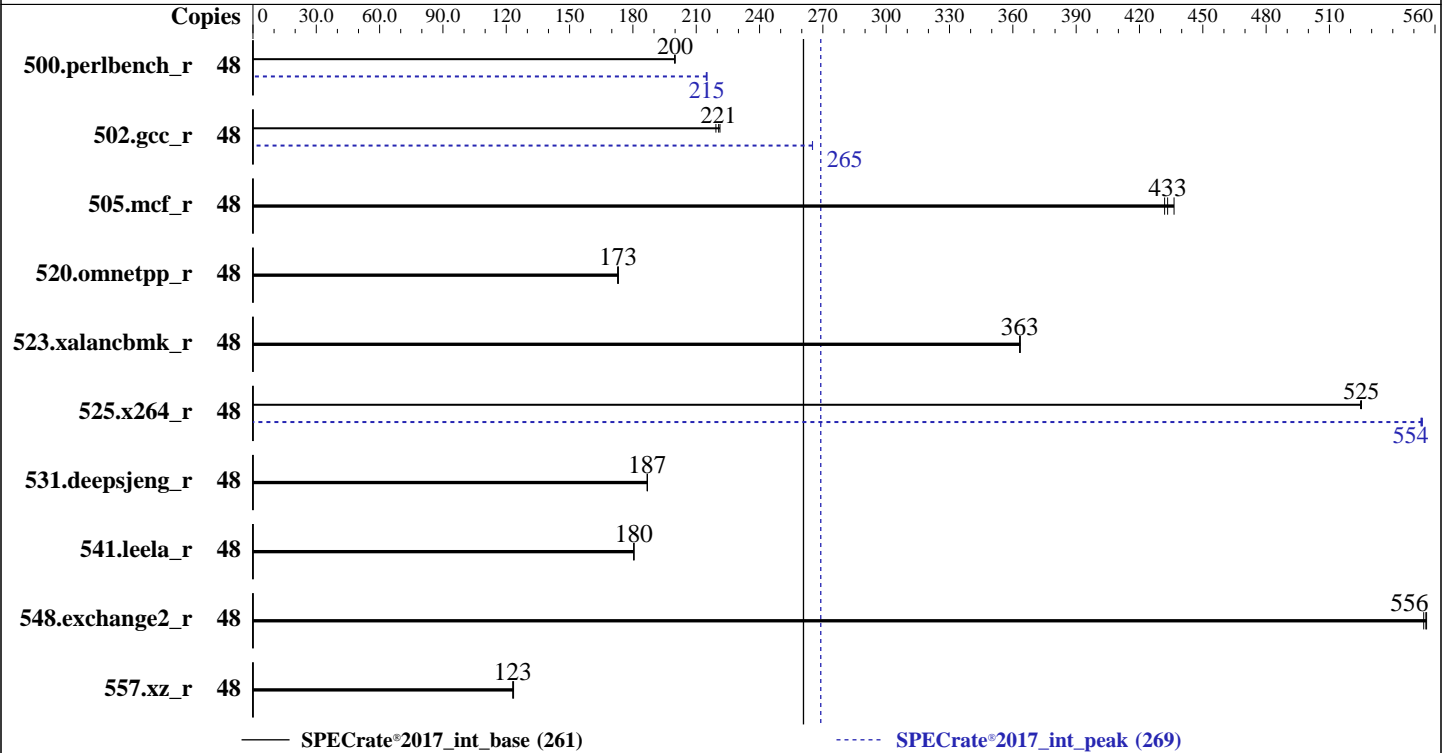

### Hardware

CPU Name: Intel Xeon Gold 6542Y  
 Max MHz: 4100  
 Nominal: 2900  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	<b>382</b>	<b>200</b>	382	200	383	200	48	355	215	356	215	<b>355</b>	<b>215</b>
502.gcc_r	48	310	219	<b>308</b>	<b>221</b>	307	221	48	<b>256</b>	<b>265</b>	256	265	256	265
505.mcf_r	48	178	436	180	432	<b>179</b>	<b>433</b>	48	178	436	180	432	<b>179</b>	<b>433</b>
520.omnetpp_r	48	<b>364</b>	<b>173</b>	364	173	365	173	48	<b>364</b>	<b>173</b>	364	173	365	173
523.xalancbmk_r	48	<b>139</b>	<b>363</b>	139	363	140	363	48	<b>139</b>	<b>363</b>	139	363	140	363
525.x264_r	48	160	525	<b>160</b>	<b>525</b>	160	525	48	<b>152</b>	<b>554</b>	152	553	152	554
531.deepsjeng_r	48	295	187	<b>294</b>	<b>187</b>	294	187	48	295	187	<b>294</b>	<b>187</b>	294	187
541.leela_r	48	440	180	441	180	<b>440</b>	<b>180</b>	48	440	180	441	180	<b>440</b>	<b>180</b>
548.exchange2_r	48	<b>226</b>	<b>556</b>	227	555	226	556	48	<b>226</b>	<b>556</b>	227	555	226	556
557.xz_r	48	<b>421</b>	<b>123</b>	420	123	421	123	48	<b>421</b>	<b>123</b>	420	123	421	123

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Gold 6542Y.

BIOS Configuration:

Workload Profile set to General Throughput Compute.

Enhanced Processor Performance Profile set to Aggressive.

Thermal Configuration set to Maximum Cooling.

Memory Patrol Scrubbing set to Disabled.

Sub-NUMA Clustering (SNC) set to Enable SNC2(2-clusters).

Workload Profile set to Custom.

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State.

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Feb 14 12:11:37 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
12:11:37 up 2 min, 0 users, load average: 0.05, 0.04, 0.01
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU   WHAT
```

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 1030643
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1030643
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 6542Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x21000200
bugs            : spectre_v1 spectre_v2 spec_store_bypass swaps eibrs_pbrsb
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 0: apicids 0-47
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL320 Gen11

( 2.90 GHz, Intel Xeon Gold 6542Y )

## SPECrate®2017\_int\_base = 261

## SPECrate®2017\_int\_peak = 269

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               48
On-line CPU(s) list:  0-47
Vendor ID:            GenuineIntel
Model name:           INTEL(R) XEON(R) GOLD 6542Y
CPU family:           6
Model:                207
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):            1
Stepping:             2
BogoMIPS:             5800.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                    arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

Virtualization: VT-x

L1d cache: 1.1 MiB (24 instances)

L1i cache: 768 KiB (24 instances)

L2 cache: 48 MiB (24 instances)

L3 cache: 60 MiB (1 instance)

NUMA node(s): 2

NUMA node0 CPU(s): 0-11,24-35

NUMA node1 CPU(s): 12-23,36-47

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

L1d	48K	1.1M	12 Data	1	64	1	64
L1i	32K	768K	8 Instruction	1	64	1	64
L2	2M	48M	16 Unified	2	2048	1	64
L3	60M	60M	15 Unified	3	65536	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 128712 MB
node 0 free: 128164 MB
node 1 cpus: 12-23,36-47
node 1 size: 128971 MB
node 1 free: 128205 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

### 9. /proc/meminfo

MemTotal: 263868148 kB

### 10. who -r

run-level 3 Feb 14 12:10

### 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load ksm
kvm_stat lunmask multipathd rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
target-isns targetcli targetclid tuned
indirect wickedd

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=c791a00c-0ac0-437c-a123-380d9ca9a82f
splash=silent
resume=/dev/disk/by-uuid/2045128c-8306-498f-ba9c-cef6051d72af
mitigations=auto
quiet
security=apparmor

```

### 14. cpupower frequency-info

analyzing CPU 0:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

Current active profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	155G	137G	18G	89%	/home

-----  
(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id

Vendor: HPE  
Product: ProLiant DL320 Gen11  
Product Family: ProLiant  
Serial: CNX2210H28

22. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 2.12  
BIOS Date: 12/13/2023  
BIOS Revision: 2.12  
Firmware Revision: 1.55

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmallo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallocc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

( 2.90 GHz, Intel Xeon Gold 6542Y )

**SPECrate®2017\_int\_base = 261**

**SPECrate®2017\_int\_peak = 269**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-14 01:41:37-0500.

Report generated on 2024-03-18 10:12:17 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-15.