



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Jun-2023

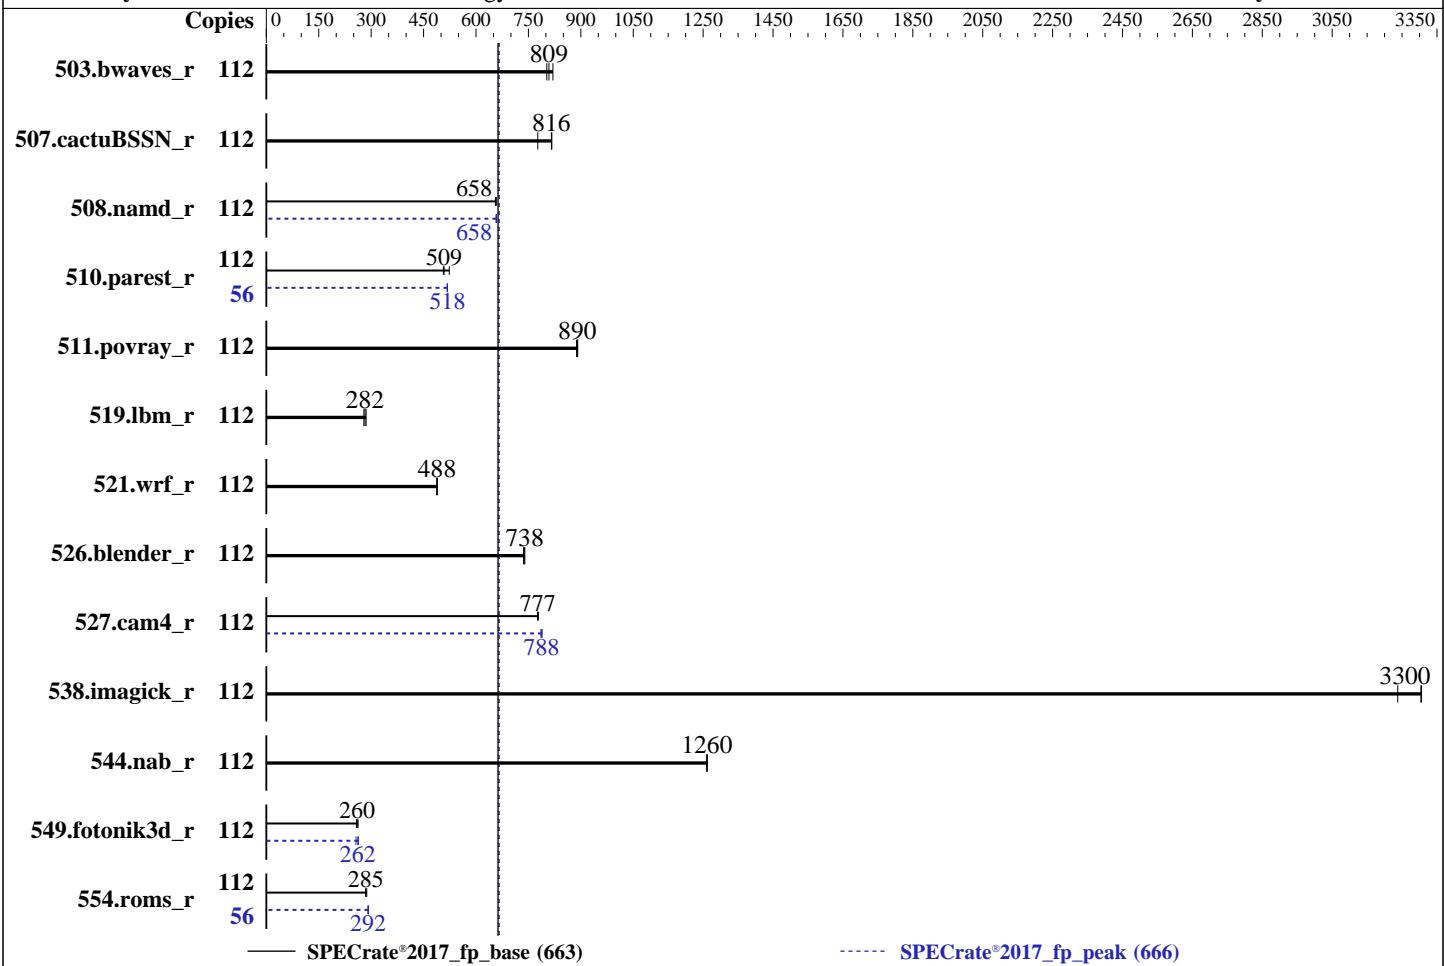

Hardware		Software	
CPU Name:	AMD EPYC 9734	OS:	SUSE Linux Enterprise Server 15 SP5
Max MHz:	3000	Compiler:	Kernel 5.14.21-150500.53-default
Nominal:	2200	Parallel:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	112 cores, 1 chip	Firmware:	No
Orderable:	1 chip	File System:	Lenovo BIOS Version GPE103H 1.10 released Mar-2024
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	xfs
L2:	1 MB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 16 MB shared / 7 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)	Power Management:	None
Storage:	1 x 960 GB M.2 SATA SSD		BIOS and OS set to prefer performance at the cost of additional power usage
Other:	CPU Cooling: Air		



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	<b><u>1389</u></b>	<b><u>809</u></b>	1399	803	1369	820	112	<b><u>1389</u></b>	<b><u>809</u></b>	1399	803	1369	820
507.cactubSSN_r	112	183	777	174	817	<b><u>174</u></b>	<b><u>816</u></b>	112	183	777	174	817	<b><u>174</u></b>	<b><u>816</u></b>
508.namd_r	112	162	655	<b><u>162</u></b>	<b><u>658</u></b>	162	658	112	162	658	162	657	<b><u>162</u></b>	<b><u>658</u></b>
510.parest_r	112	<b><u>576</u></b>	<b><u>509</u></b>	578	507	560	524	56	283	517	283	518	<b><u>283</u></b>	<b><u>518</u></b>
511.povray_r	112	295	888	<b><u>294</u></b>	<b><u>890</u></b>	294	891	112	295	888	<b><u>294</u></b>	<b><u>890</u></b>	294	891
519.lbm_r	112	423	279	<b><u>418</u></b>	<b><u>282</u></b>	413	285	112	423	279	<b><u>418</u></b>	<b><u>282</u></b>	413	285
521.wrf_r	112	513	489	514	488	<b><u>514</u></b>	<b><u>488</u></b>	112	513	489	514	488	<b><u>514</u></b>	<b><u>488</u></b>
526.blender_r	112	231	740	232	736	<b><u>231</u></b>	<b><u>738</u></b>	112	231	740	232	736	<b><u>231</u></b>	<b><u>738</u></b>
527.cam4_r	112	252	778	252	776	<b><u>252</u></b>	<b><u>777</u></b>	112	248	789	<b><u>249</u></b>	<b><u>788</u></b>	249	786
538.imagick_r	112	86.0	3240	<b><u>84.3</u></b>	<b><u>3300</u></b>	84.3	3310	112	86.0	3240	<b><u>84.3</u></b>	<b><u>3300</u></b>	84.3	3310
544.nab_r	112	149	1260	<b><u>149</u></b>	<b><u>1260</u></b>	150	1260	112	149	1260	<b><u>149</u></b>	<b><u>1260</u></b>	150	1260
549.fotonik3d_r	112	<b><u>1678</u></b>	<b><u>260</u></b>	1692	258	1662	263	112	1701	257	1657	263	<b><u>1667</u></b>	<b><u>262</u></b>
554.roms_r	112	619	287	626	284	<b><u>625</u></b>	<b><u>285</u></b>	56	306	291	<b><u>305</u></b>	<b><u>292</u></b>	305	292

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017-1.1.9-amd-
    -aocc400-znver4-A1.2/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

L2 Stream HW Prefetcher set to Disabled

SMT Mode set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Mar  2 05:52:59 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

---

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w
05:52:59 up 4:14, 1 user, load average: 0.07, 0.02, 0.00
USER      TTY      FROM             LOGIN@     IDLE     JCPU    PCPU WHAT
root      ttys1     -          01:39    11.00s   1.35s   0.07s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3094737
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 3094737
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.026/templogs/preenv.fprate.026.0.log --lognum 026.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
```

---

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Platform Notes (Continued)

6. /proc/cpuinfo

```
model name      : AMD EPYC 9734 112-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 160
stepping        : 2
microcode       : 0xaa00213
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 112
siblings        : 112
1 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 0: apicids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                112
On-line CPU(s) list:   0-111
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9734 112-Core Processor
CPU family:             25
Model:                 160
Thread(s) per core:    1
Core(s) per socket:    112
Socket(s):              1
Stepping:               2
Frequency boost:       enabled
CPU max MHz:           2999.2180
CPU min MHz:           1500.0000
BogoMIPS:               4393.07
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfmpfperf rapl pnpi pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt
tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
cdp_13 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

**SPECrate®2017\_fp\_base = 663**

**SPECrate®2017\_fp\_peak = 666**

CPU2017 License: 9017

**Test Date:** Apr-2024

Test Sponsor: Lenovo Global Technology

**Hardware Availability:** May-2024

Tested by: Lenovo Global Technology

**Software Availability:** Jun-2023

## Platform Notes (Continued)

```

Virtualization: overflow_recov succor smca fsrm flush_lld
AMD-V

L1d cache: 3.5 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 112 MiB (112 instances)
L3 cache: 256 MiB (16 instances)

NUMA node(s): 4
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111

Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     32K     3.5M    8 Data          1       64        1           64
  L1i     32K     3.5M    8 Instruction   1       64        1           64
  L2      1M      112M    8 Unified       2      2048        1           64
  L3     16M     256M   16 Unified      3     16384        1           64

```

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-27
node 0 size: 193191 MB
node 0 free: 192181 MB
node 1 cpus: 28-55
node 1 size: 193528 MB
node 1 free: 192586 MB
node 2 cpus: 56-83
node 2 size: 193528 MB
node 2 free: 192345 MB
node 3 cpus: 84-111
node 3 size: 193464 MB
node 3 free: 192403 MB
node distances:
node  0  1  2  3
 0: 10 20 20 20
 1: 20 10 20 20
 2: 20 20 10 20
 3: 20 20 20 10

```

-----  
9. /proc/meminfo

```

MemTotal: 792283364 kB

```

-----  
10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Platform Notes (Continued)

run-level 3 Mar 2 01:39

```
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target      Status
multi-user          running

12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                  kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                  systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled         autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmiev
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind
                  rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd
generated        ntp_sync
indirect         wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=3505b9fe-ece-4cel-bf46-116abd9cf337
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Platform Notes (Continued)

```
vm.swappiness           1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode       1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap            64
    pages_to_scan           4096
    scan_sleep_millisecs    10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   893G   25G  868G   3%  /

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SD535V3 MB
Product Family:  ThinkSystem
Serial:          1234567890

-----
21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
1x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
2x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
9x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     GPE103H-1.10
BIOS Date:        03/12/2024
BIOS Revision:    1.10
Firmware Revision: 0.50
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Platform Notes (Continued)

System date/time for this result was not updated to right time  
and actual testing date can be referred to "spec.cpu2017.test\_date"

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
-----

=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
-----

=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
-----

=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
-----

=====
Fortran      | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdaloc -lflang
```

C++ benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc
-lflang
```

Fortran benchmarks:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdaloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -fsto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology	SPECrate®2017_fp_base = 663
ThinkSystem SD535 V3 (2.20 GHz, AMD EPYC 9734)	SPECrate®2017_fp_peak = 666
CPU2017 License: 9017	Test Date: Apr-2024
Test Sponsor: Lenovo Global Technology	Hardware Availability: May-2024
Tested by: Lenovo Global Technology	Software Availability: Jun-2023

## Peak Compiler Invocation

### C benchmarks:

| clang

## C++ benchmarks:

| clang++

## Fortran benchmarks:

| flang

Benchmarks using both Fortran and C:

flang clang

### Benchmarks using both C and C++:

clang++ clang

## Benchmarks using Fortran, C, and C++:

clang++ clang flang

# Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

## C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver4 -fvecelib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc
```

**(Continued on next page)**



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Peak Optimization Flags (Continued)

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdaloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdaloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc
-lflang
```

Benchmarks using both C and C++:

```
511.povray_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017\_fp\_base = 663

SPECrate®2017\_fp\_peak = 666

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Genoa-U.html>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Genoa-U.xml>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-01 16:52:59-0500.

Report generated on 2024-05-07 22:21:32 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.