



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

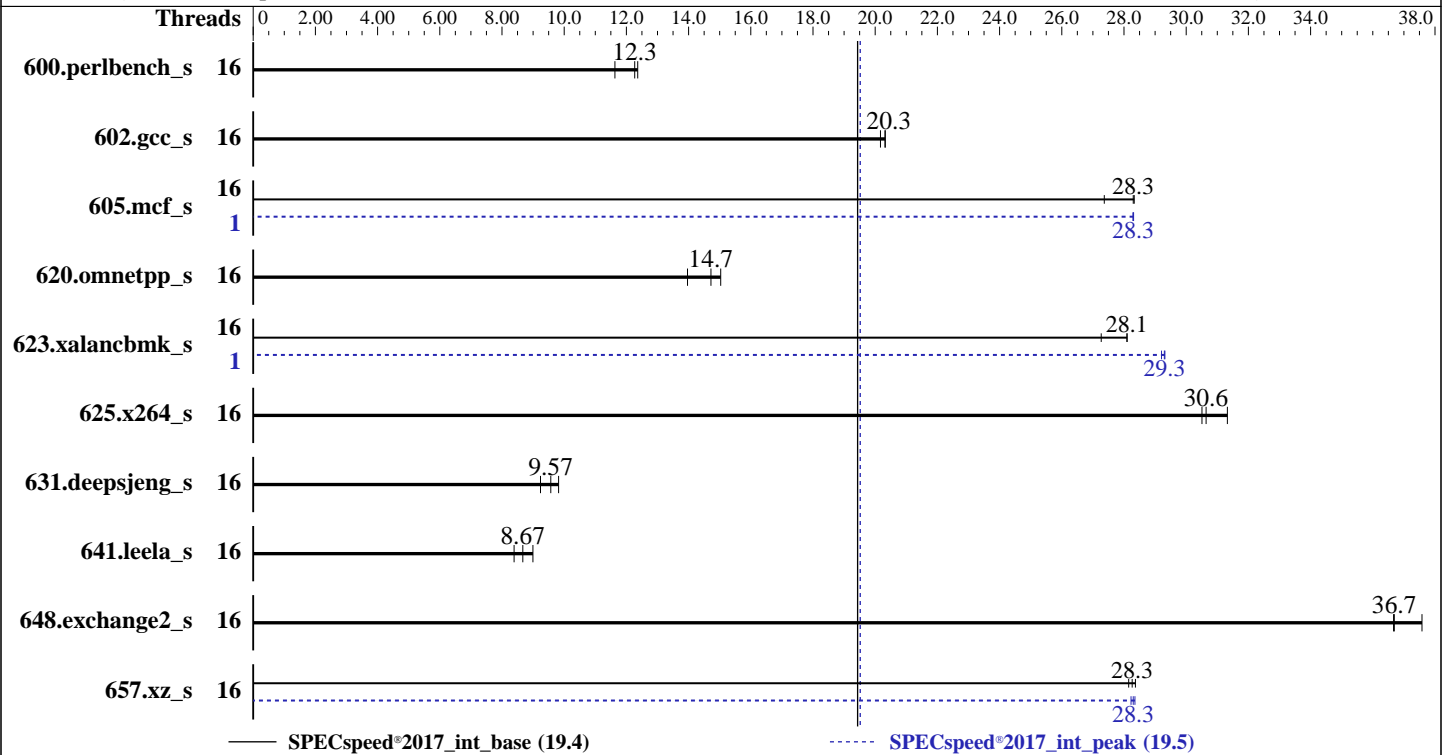

Hardware

CPU Name: AMD EPYC 4564P
 Max MHz: 5700
 Nominal: 4500
 Enabled: 16 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-U, running at 5200)
 Storage: 1 x 960 GB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.4 LTS
 Kernel 6.5.0-27-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2a released Feb-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	153	11.6	144	12.4	145	12.3	16	153	11.6	144	12.4	145	12.3
602.gcc_s	16	196	20.3	196	20.3	197	20.2	16	196	20.3	196	20.3	197	20.2
605.mcf_s	16	173	27.4	167	28.3	167	28.3	1	167	28.3	167	28.3	167	28.3
620.omnetpp_s	16	117	14.0	108	15.0	111	14.7	16	117	14.0	108	15.0	111	14.7
623.xalancbmk_s	16	52.0	27.3	50.4	28.1	50.4	28.1	1	48.3	29.3	48.4	29.3	48.5	29.2
625.x264_s	16	56.3	31.3	57.8	30.5	57.6	30.6	16	56.3	31.3	57.8	30.5	57.6	30.6
631.deepsjeng_s	16	155	9.24	150	9.57	146	9.82	16	155	9.24	150	9.57	146	9.82
641.leela_s	16	203	8.39	197	8.67	190	8.99	16	203	8.39	197	8.67	190	8.99
648.exchange2_s	16	78.2	37.6	80.2	36.7	80.1	36.7	16	78.2	37.6	80.2	36.7	80.1	36.7
657.xz_s	16	219	28.3	218	28.4	220	28.2	16	218	28.3	219	28.2	218	28.4

SPECspeed®2017_int_base = **19.4**

SPECspeed®2017_int_peak = **19.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-15"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
SMT Control = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-1015a-mt Mon Apr 15 01:50:18 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux as-1015a-mt 6.5.0-27-generic #28~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 15 10:51:06 UTC 2 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
01:50:18 up 7 min,  4 users,  load average: 0.08, 0.03, 0.01
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
lab       tty1    -                01:44    8.00s  0.42s  0.00s  -bash
lab       pts/0   -                01:45    8.00s  0.74s  0.41s  sudo su -
lab       tty2    -                01:49   17.00s  0.02s  0.00s  -bash
lab       pts/1   -                01:49   17.00s  0.00s  0.01s  sudo su -
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      lab
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            253495
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeak
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 4564P 16-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 97
stepping        : 2
microcode       : 0xa601206
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size        : 3584 4K pages
cpu cores       : 16
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-15
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 4564P 16-Core Processor
CPU family:            25
Model:                97
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):             1
Stepping:              2
CPU max MHz:          5881.0000
CPU min MHz:          400.0000
BogoMIPS:              8983.04
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2
                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                        cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                        vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                        avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                        wbnoinvd cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                        flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```

Virtualization:          vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2
                        gfni vaes vpc1mulqdq avx512_vnmi avx512_bitalg avx512_vpopcntdq rdpid
                        overflow_recov succor smca flush_llid
AMD-V
L1d cache:              512 KiB (16 instances)
L1i cache:              512 KiB (16 instances)
L2 cache:               16 MiB (16 instances)
L3 cache:               64 MiB (2 instances)
NUMA node(s):           1
NUMA node0 CPU(s):     0-15
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
                                disabled, RSB filling, PBRBS-eIBRS Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   32K   512K     8 Data             1    64     1           64
L1i   32K   512K     8 Instruction        1    64     1           64
L2    1M    16M      8 Unified            2  2048     1           64
L3    32M   64M     16 Unified            3 32768     1           64

```

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 63428 MB
node 0 free: 62868 MB
node distances:
node 0
0: 10

```

```

9. /proc/meminfo
MemTotal:          64950444 kB

```

```

10. who -r
run-level 5 Apr 15 01:44

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
Default Target Status
graphical degraded

```

```

12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
vgauth

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower

generated apport
indirect uidd
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common
-----
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.5.0-27-generic
root=UUID=493aa310-a89f-44f0-97e2-e438e6abbb08
ro
-----
```

```
-----
15. cpupower frequency-info
analyzing CPU 13:
current policy: frequency should be within 400 MHz and 5.88 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 2
Pstate-P0: 4500MHz
-----
```

```
-----
16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.4 LTS
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 879G 17G 817G 3% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Micron Technology MTC16C2085S1UC56BGZ 32 GB 2 rank 5600, configured at 5200
  2x NO DIMM NO DIMM
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.2a
BIOS Date: 02/15/2024
BIOS Revision: 5.32
-----
```

Compiler Version Notes

```
=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Compiler Version Notes (Continued)

| 657.xz_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF, AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Base Portability Flags (Continued)

648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Base Other Flags (Continued)

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: Same as 605.mcf_s

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2024
Hardware Availability: May-2024
Software Availability: Mar-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4564P)

SPECspeed®2017_int_base = 19.4

SPECspeed®2017_int_peak = 19.5

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Mar-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-14 21:50:18-0400.
Report generated on 2024-05-21 19:21:17 by CPU2017 PDF formatter v6716.
Originally published on 2024-05-21.