



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECSpeed®2017\_int\_base = 16.6**

**SPECSpeed®2017\_int\_peak = 16.8**

CPU2017 License: 9019


**Test Date:** Apr-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2024

**Tested by:** Cisco Systems

**Software Availability:** Feb-2024

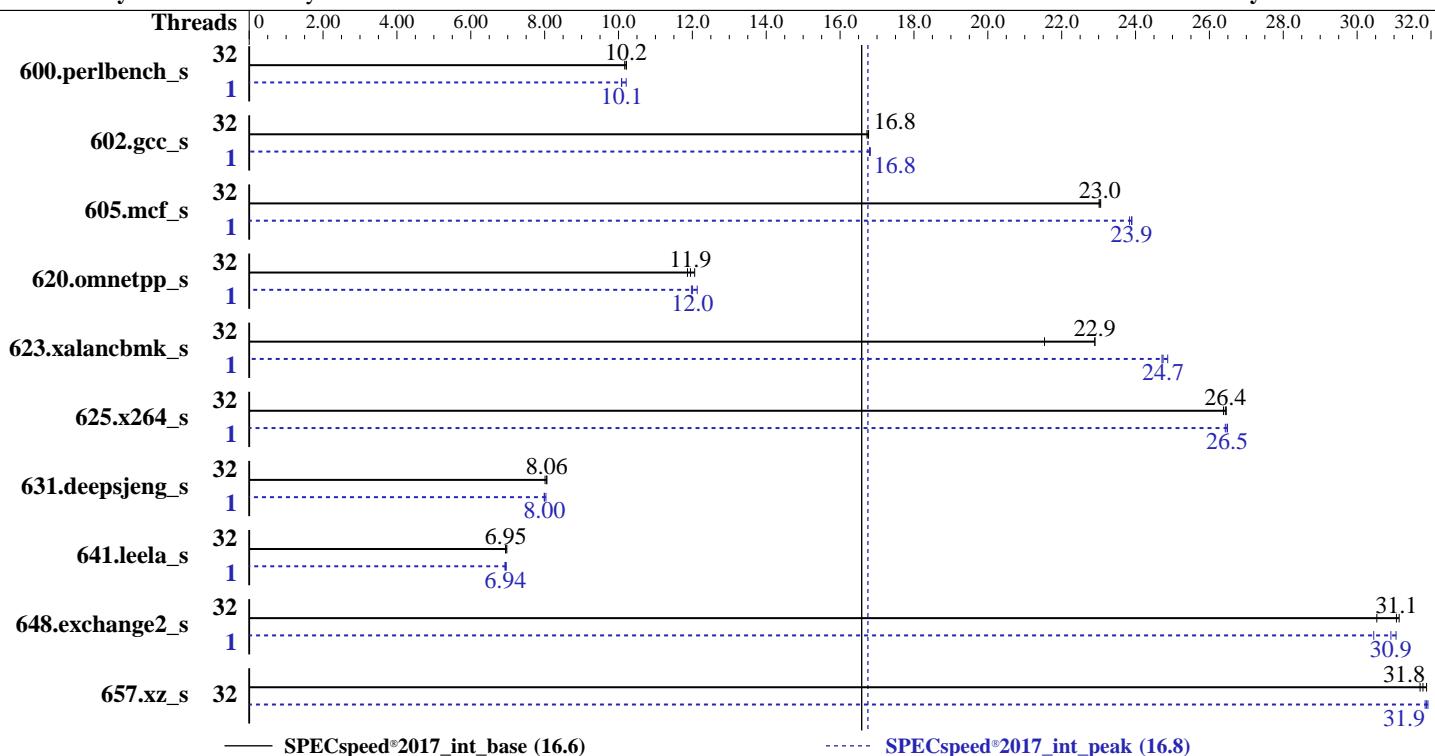

— SPECSpeed®2017\_int\_base (16.6)

- - - SPECSpeed®2017\_int\_peak (16.8)

### Hardware

CPU Name: AMD EPYC 9174F  
 Max MHz: 4400  
 Nominal: 4100  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 960 GB SSD SATA  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default  
 Compiler: C/C++/Fortran: Version 4.2.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.3.4.255 released Apr-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECspeed®2017\_int\_base = 16.6**

**SPECspeed®2017\_int\_peak = 16.8**

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<b>174</b>	<b>10.2</b>	175	10.2	174	10.2	1	<b>174</b>	10.2	<b>176</b>	<b>10.1</b>	176	10.1
602.gcc_s	32	237	16.8	<b>238</b>	<b>16.8</b>	238	16.7	1	<b>237</b>	16.8	237	16.8	<b>237</b>	<b>16.8</b>
605.mcf_s	32	205	23.0	<b>205</b>	<b>23.0</b>	205	23.1	1	<b>198</b>	23.8	198	23.9	<b>198</b>	<b>23.9</b>
620.omnetpp_s	32	135	12.1	<b>137</b>	<b>11.9</b>	137	11.9	1	<b>136</b>	<b>12.0</b>	134	12.1	136	12.0
623.xalancbmk_s	32	65.8	21.5	61.9	22.9	<b>61.9</b>	<b>22.9</b>	1	<b>57.3</b>	<b>24.7</b>	57.3	24.7	<b>57.0</b>	24.9
625.x264_s	32	66.9	26.4	66.7	26.5	<b>66.7</b>	<b>26.4</b>	1	<b>66.6</b>	<b>26.5</b>	66.7	26.4	<b>66.6</b>	26.5
631.deepsjeng_s	32	179	8.01	178	8.06	<b>178</b>	<b>8.06</b>	1	<b>179</b>	<b>8.00</b>	179	7.99	178	8.03
641.leela_s	32	<b>245</b>	<b>6.95</b>	246	6.94	245	6.98	1	<b>245</b>	6.96	<b>246</b>	<b>6.94</b>	246	6.93
648.exchange2_s	32	94.4	31.1	96.3	30.5	<b>94.6</b>	<b>31.1</b>	1	94.7	31.1	<b>95.1</b>	<b>30.9</b>	96.6	30.4
657.xz_s	32	194	31.9	<b>195</b>	<b>31.8</b>	195	31.7	32	194	31.8	<b>194</b>	<b>31.9</b>	194	31.9
<b>SPECspeed®2017_int_base = 16.6</b>							<b>SPECspeed®2017_int_peak = 16.8</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Feb-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc402_znver4_A.lib/lib:/home/aocc-compiler-4.2.0/ompd:/home/aocc-compiler-4
    .2.0/lib:/home/aocc-compiler-4.2.0/lib32:/usr/lib64:/usr/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "512M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Feb-2024

## Platform Notes

BIOS settings:  
SMT Mode set to Disabled  
NUMA nodes per socket set to NPS2  
Determinism Slider set to Power  
DF C-States set to Disabled  
TDP set to 400  
PPT set to 400

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 29 17:49:23 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -a
  - 2. w
  - 3. Username
  - 4. ulimit -a
  - 5. sysinfo process ancestry
  - 6. /proc/cpuinfo
  - 7. lscpu
  - 8. numactl --hardware
  - 9. /proc/meminfo
  - 10. who -r
  - 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  - 12. Services, from systemctl list-unit-files
  - 13. Linux kernel boot-time arguments, from /proc/cmdline
  - 14. cpupower frequency-info
  - 15. tuned-adm active
  - 16. sysctl
  - 17. /sys/kernel/mm/transparent\_hugepage
  - 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  - 19. OS release
  - 20. Disk information
  - 21. /sys/devices/virtual/dmi/id
  - 22. dmidecode
  - 23. BIOS
- 

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
17:49:23 up 2:51, 1 user, load average: 6.03, 4.41, 2.65
USER   TTY   FROM           LOGIN@   IDLE   JCPU   PCPU WHAT
root   ttys1   -           14:59    2:50m  0.82s  0.06s -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 6191426
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 6191426
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate -c amd_speed_aocc402_znver4_A1.cfg --define cores=16 --tune base,peak
--reportable --output_format all --define intspeedaffinity --define drop_caches --nopower --runmode speed
--size refspeed intspeed
runcpu --nobuild --action validate --configfile amd_speed_aocc402_znver4_A1.cfg --define cores=16 --tune
base,peak --reportable --output_format all --define intspeedaffinity --define drop_caches --nopower
--runmode speed --size refspeed --nopower --runmode speed --tune base:peak --size refspeed intspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.078/templogs/preenv.intspeed.078.0.log --lognum 078.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9174F 16-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101144
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores      : 16
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: core ids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 0: apicids 0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113
physical id 1: apicids 128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

From lscpu from util-linux 2.37.4:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECspeed®2017\_int\_base = 16.6**

**SPECspeed®2017\_int\_peak = 16.8**

**CPU2017 License:** 9019

**Test Date:** Apr-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2024

**Tested by:** Cisco Systems

**Software Availability:** Feb-2024

## Platform Notes (Continued)

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9174F 16-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	16
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	4408.2998
CPU min MHz:	1500.0000
BogoMIPS:	8187.13
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apcid aperfmpfper rapl pn1 pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 clzero iperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassist pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:	AMD-V
L1d cache:	1 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	32 MiB (32 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

```
From lscpu --cache:
      NAME  ONE-SIZE  ALL-SIZE  WAYS  TYPE      LEVEL  SETS  PHY-LINE  COHERENCY-SIZE
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Platform Notes (Continued)

L1d	32K	1M	8 Data	1	64	1	64
L1i	32K	1M	8 Instruction	1	64	1	64
L2	1M	32M	8 Unified	2	2048	1	64
L3	32M	512M	16 Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-7
node 0 size: 386768 MB
node 0 free: 379725 MB
node 1 cpus: 8-15
node 1 size: 387069 MB
node 1 free: 386390 MB
node 2 cpus: 16-23
node 2 size: 387069 MB
node 2 free: 386598 MB
node 3 cpus: 24-31
node 3 size: 386980 MB
node 3 free: 386662 MB
node distances:
node   0   1   2   3
 0: 10 12 32 32
 1: 12 10 32 32
 2: 32 32 10 12
 3: 32 32 12 10
```

-----  
9. /proc/meminfo

```
MemTotal: 1585036796 kB
```

-----  
10. who -r  
run-level 3 Apr 29 14:58

-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny systemd-remount-fs
enabled-runtime	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd munge nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 ypbinder
disabled	wickedd
indirect	wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Platform Notes (Continued)

```
root=UUID=dbd693aa-207d-4584-a3a2-caaa5daf0409
splash=silent
mitigations=auto
quiet
security=


-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 4.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes


-----
15. tuned-adm active
Current active profile: latency-performance


-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0


-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force


-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag              1
max_ptes_none       511
max_ptes_shared     256
max_ptes_swap       64
pages_to_scan       4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Platform Notes (Continued)

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdc2 xfs 893G 309G 585G 35% /

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Cisco Systems Inc  
Product: UCSC-C245-M8SX  
Serial: WZP27520MSW

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C245M8.4.3.4.255.0410240854  
BIOS Date: 04/10/2024  
BIOS Revision: 5.27

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====

AMD clang version 16.0.3 (CLANG: AOCC\_4.2.0-Build#89 2023\_12\_13)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /home/aocc-compiler-4.2.0/bin

=====

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====

AMD clang version 16.0.3 (CLANG: AOCC\_4.2.0-Build#89 2023\_12\_13)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /home/aocc-compiler-4.2.0/bin

=====

=====

Fortran | 648.exchange2\_s(base, peak)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECspeed®2017\_int\_base = 16.6**

**SPECspeed®2017\_int\_peak = 16.8**

**CPU2017 License:** 9019

**Test Date:** Apr-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2024

**Tested by:** Cisco Systems

**Software Availability:** Feb-2024

## Compiler Version Notes (Continued)

AMD clang version 16.0.3 (CLANG: AOCC\_4.2.0-Build#89 2023\_12\_13)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /home/aocc-compiler-4.2.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM

-ffast-math -fopenmp -flto -fstruct-layout=7

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3

-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang

-lamdalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECspeed®2017\_int\_base = 16.6**

**SPECspeed®2017\_int\_peak = 16.8**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Feb-2024

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt --std=c++14  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-error=register -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -z muldefs -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
--std=c++14 -fvirtual-function-elimination  
-fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm  
-lamdalloc-ext -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

SPECspeed®2017\_int\_base = 16.6

SPECspeed®2017\_int\_peak = 16.8

CPU2017 License: 9019

Test Date: Apr-2024

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2024

Tested by: Cisco Systems

Software Availability: Feb-2024

## Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
--std=c++14 -mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
--std=c++14 -fvirtual-function-elimination  
-fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm  
-lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-error=register -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9174F 32-Core Processor)

**SPECspeed®2017\_int\_base = 16.6**

**SPECspeed®2017\_int\_peak = 16.8**

**CPU2017 License:** 9019

**Test Date:** Apr-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2024

**Tested by:** Cisco Systems

**Software Availability:** Feb-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

<http://www.spec.org/cpu2017/flags/aocc402-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

<http://www.spec.org/cpu2017/flags/aocc402-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-29 20:49:23-0400.

Report generated on 2024-06-04 11:55:14 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-04.