



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix


SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

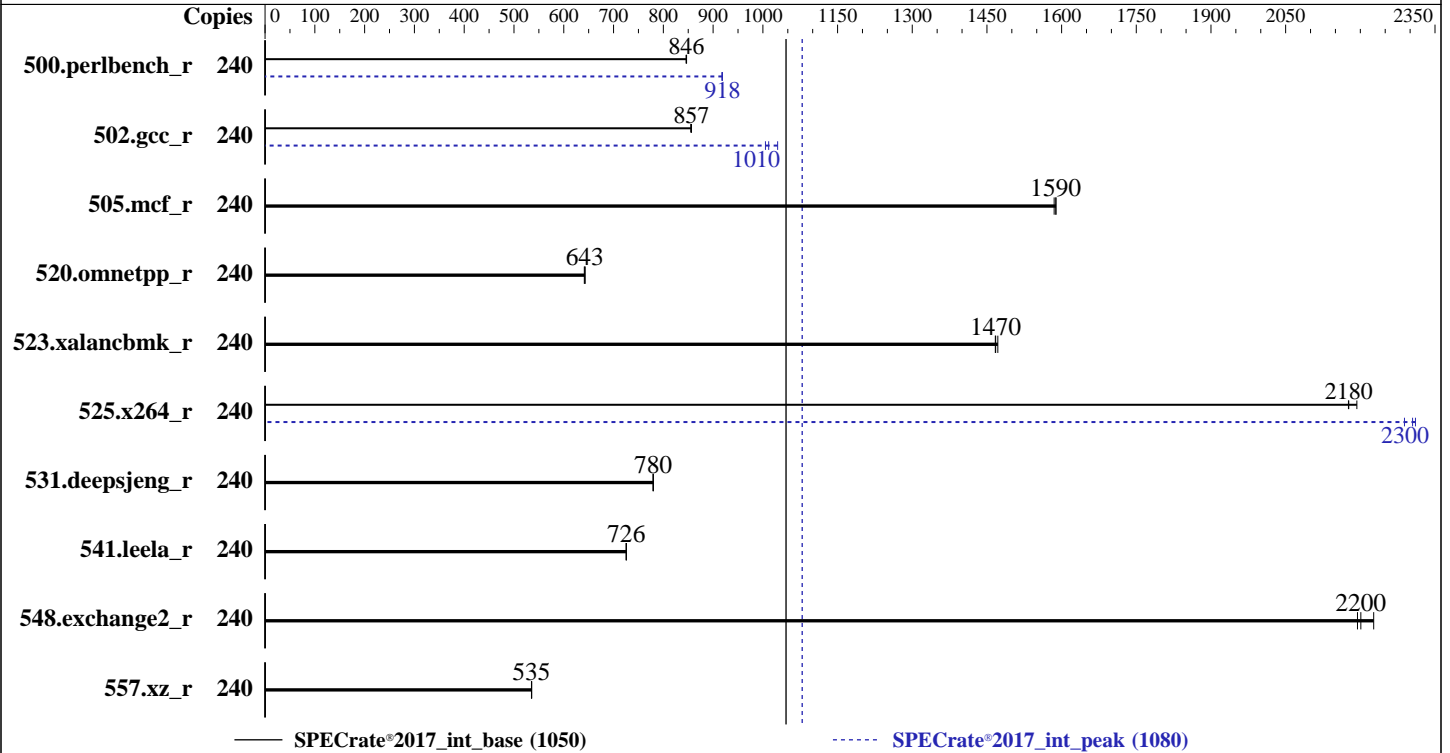

Hardware

CPU Name: Intel Xeon Platinum 8580
Max MHz: 4000
Nominal: 2000
Enabled: 120 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 300 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage: 1 x 14 TB SATA HDD (7200 rpm)
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
5.14.21-150500.53-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran
Compiler for Linux;
Parallel: No
Firmware: Nettrix BIOS Version NNH1041268 released Jan-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost
of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	452	846	451	846	451	847	240	416	918	416	918	416	919
502.gcc_r	240	397	857	397	857	397	855	240	330	1030	338	1010	336	1010
505.mcf_r	240	244	1590	244	1590	245	1590	240	244	1590	244	1590	245	1590
520.omnetpp_r	240	491	641	490	643	490	643	240	491	641	490	643	490	643
523.xalancbmk_r	240	173	1470	172	1470	173	1470	240	173	1470	172	1470	173	1470
525.x264_r	240	193	2180	192	2190	193	2180	240	182	2300	182	2310	184	2290
531.deepsjeng_r	240	353	780	353	780	353	780	240	353	780	353	780	353	780
541.leela_r	240	548	725	548	726	548	726	240	548	725	548	726	548	726
548.exchange2_r	240	282	2230	286	2200	287	2190	240	282	2230	286	2200	287	2190
557.xz_r	240	484	535	484	535	484	536	240	484	535	484	535	484	536

SPECrate®2017_int_base = 1050

SPECrate®2017_int_peak = 1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/tzk/SPECcpu/lib/intel64:/home/tzk/SPECcpu/lib/ia32:/home/tzk/SPECcpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

General Notes (Continued)

numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

SNC (Sub NUMA) set to Enable SNC2 (2-clusters)
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
DCU Streamer Prefetcher set to Disabled
Hardware P-States set to Native Mode

Sysinfo program /home/tzk/SPECcpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue May 14 19:01:30 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
19:01:30 up 2:48, 2 users, load average: 0.00, 0.00, 7.37
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 10.2.49.197 16:14 2.00s 1.21s 0.17s -bash
root pts/1 10.2.49.197 16:17 1:35m 23.09s 23.01s ./ptat -mon -filter 0xf -l 1 -scr -moncpu 0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4124926
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4124926
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
/bin/sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --define default-platform-flags --define numcopies=240 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --define default-platform-flags --define numcopies=240 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.346/temlogs/preenv.intrate.346.0.log --lognum 346.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/tzk/SPECcpu

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8580
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 60
siblings      : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 240
On-line CPU(s) list:   0-239
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8580
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              2
Stepping:               2
CPU max MHz:            4000.0000
CPU min MHz:            800.0000
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                        ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                        rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsave
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             5.6 MiB (120 instances)
L1i cache:             3.8 MiB (120 instances)
L2 cache:              240 MiB (120 instances)
L3 cache:              600 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-29,120-149
NUMA node1 CPU(s):    30-59,150-179
NUMA node2 CPU(s):    60-89,180-209
NUMA node3 CPU(s):    90-119,210-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-29,120-149
node 0 size: 257554 MB
node 0 free: 242993 MB
node 1 cpus: 30-59,150-179
node 1 size: 258032 MB
node 1 free: 245801 MB
node 2 cpus: 60-89,180-209
node 2 size: 257998 MB
node 2 free: 245017 MB
node 3 cpus: 90-119,210-239
node 3 size: 257677 MB
node 3 free: 245450 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056012904 kB

10. who -r

run-level 3 May 14 16:13

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron cups firewalld getty@
               haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lm_sensors
               lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
               wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       apcpsd autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates
               chrony-wait console-getty corosync corosync-notifyd crm_mon ctdb cups-browsed debug-shell
               dlm dmraid-activation drbd drbd-lvchange@ drbd-wait-promotable@ ebttables
               exchange-bmc-os-info fancontrol gpm grub2-once haveged-switch-root hawk ipmi ipmievd
               ipvsadm issue-add-ssh-keys kexec-load ldirectord logd lunmask lvmlockd lvmlocks
               man-db-create multipathd nfs nfs-blkmap pacemaker rpcbind rpmconfigcheck rsyncd sanlock
               sbd sbd_remote serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Platform Notes (Continued)

```
indirect
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 wdm
wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=aec0cd35-b79c-432e-8a92-68e81aa94bbb
splash=silent
resume=/dev/disk/by-uuid/d53caa22-ee5c-46fa-a8f2-44d678cc6069
mitigations=auto
quiet
security=apparmor
crashkernel=317M,high
crashkernel=72M,low
default_hugepagesz=1G
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     5000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  1000
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

18. OS release
From /etc/*-release /etc/*-version
os-release openSUSE Leap 15.5

19. Disk information
SPEC is set to: /home/tzk/SPECcpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 12T 150G 12T 2% /home

20. /sys/devices/virtual/dmi/id
Vendor: Nettrix
Product: R620 G50
Product Family: Rack
Serial: 6101810603447812

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Hynix HMC94AGBRA179N 64 GB 2 rank 5600

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041268
BIOS Date: 01/26/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2024
Hardware Availability: Dec-2023
Software Availability: Jan-2024

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 1050

R620 G50 (Intel Xeon Platinum 8580, 2 GHz)

SPECrate®2017_int_peak = 1080

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Jan-2024

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-14 07:01:30-0400.

Report generated on 2024-06-05 10:40:27 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-04.