



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

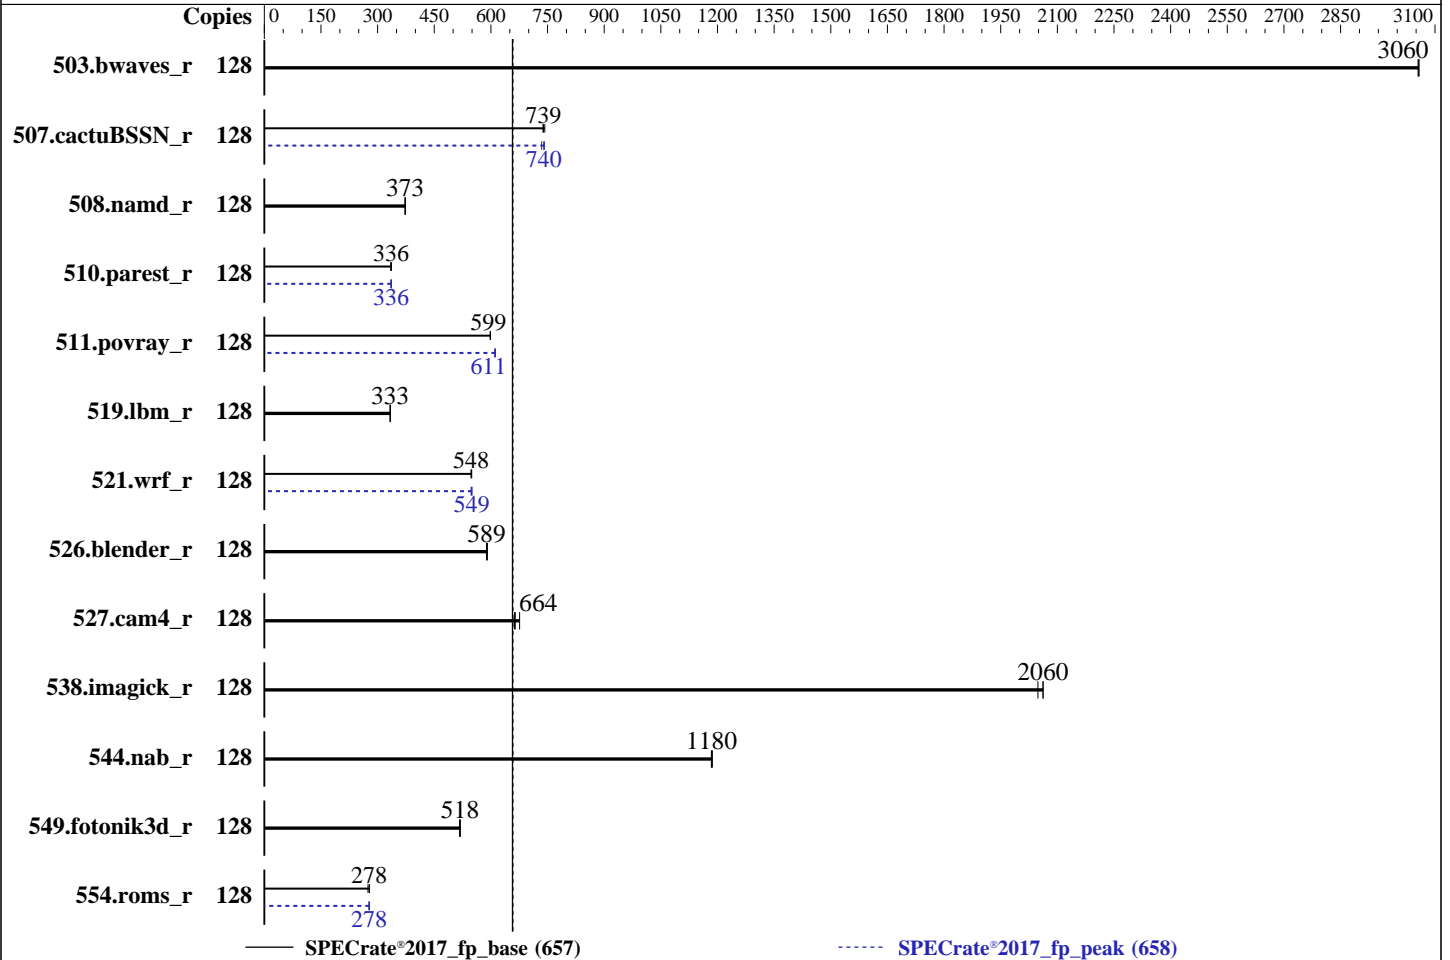

Hardware

CPU Name: Intel Xeon Gold 6430
 Max MHz: 3400
 Nominal: 2100
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.02.02.09 Released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	420	3060	420	3060	420	3060	128	420	3060	420	3060	420	3060
507.cactuBSSN_r	128	220	738	219	739	218	743	128	219	742	221	734	219	740
508.namd_r	128	326	373	326	373	326	373	128	326	373	326	373	326	373
510.parest_r	128	996	336	1000	335	996	336	128	998	336	997	336	996	336
511.povray_r	128	500	598	499	599	499	599	128	488	612	490	610	489	611
519.lbm_r	128	405	333	404	334	405	333	128	405	333	404	334	405	333
521.wrf_r	128	522	549	523	548	523	548	128	522	549	524	548	521	550
526.blender_r	128	331	589	331	589	330	591	128	331	589	331	589	330	591
527.cam4_r	128	337	664	338	662	331	676	128	337	664	338	662	331	676
538.imagick_r	128	154	2060	154	2060	155	2050	128	154	2060	154	2060	155	2050
544.nab_r	128	182	1190	182	1180	182	1180	128	182	1190	182	1180	182	1180
549.fotonik3d_r	128	965	517	962	519	962	518	128	965	517	962	519	962	518
554.roms_r	128	732	278	732	278	741	274	128	732	278	734	277	732	278

SPECrate®2017_fp_base = **657**

SPECrate®2017_fp_peak = **658**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu2017/lib/intel64:/home/speccpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)
Enable LP [Global] Set to ALL LPs

Sysinfo program /home/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Jun 15 22:01:50 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
22:01:50 up 2 min, 2 users, load average: 0.27, 0.27, 0.11
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 22:01 6.00s 1.44s 0.04s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
root pts/0 22:00 1:34 0.06s 0.06s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060854
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060854
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 128 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 128 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/templogs/preenv.fprate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6430
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0004d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6430
BIOS Model name:       Intel(R) Xeon(R) Gold 6430
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111
NUMA node6 CPU(s):    48-55,112-119
NUMA node7 CPU(s):    56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 63740 MB
node 0 free: 63394 MB
node 1 cpus: 8-15,72-79
node 1 size: 64508 MB
node 1 free: 64209 MB
node 2 cpus: 16-23,80-87
node 2 size: 64508 MB
node 2 free: 64224 MB
node 3 cpus: 24-31,88-95
node 3 size: 64508 MB
node 3 free: 64182 MB
node 4 cpus: 32-39,96-103
node 4 size: 64508 MB
node 4 free: 64197 MB
node 5 cpus: 40-47,104-111
node 5 size: 64508 MB
node 5 free: 64211 MB
node 6 cpus: 48-55,112-119
node 6 size: 64469 MB
node 6 free: 63769 MB
node 7 cpus: 56-63,120-127
node 7 size: 64503 MB
node 7 free: 64156 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 527621428 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

run-level 3 Jun 15 22:00

11. Systemd service manager version: systemd 252 (252-13.el9_2)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog
rtkit-daemon selinux-autorelabel-mark sep5 sshd sssd sysstat systemd-boot-update
systemd-network-generator tuned udisks2 upower
systemd-remount-fs
enabled-runtime
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables nvmet nvmmf-autoconnect
pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

vm.dirty_ratio          40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold     500
vm.min_unmapped_ratio    1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness            10
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode     0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
system-release  Red Hat Enterprise Linux release 9.2 (Plow)

```

```

-----
21. Disk information
SPEC is set to: /home/speccpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  194G  179G  53% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         G8600 V7
Product Family:  EagleStream

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.02.09
BIOS Date: 03/04/2024

Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++, C    | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran   | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 657

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 658

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-15 10:01:50-0400.
Report generated on 2024-07-03 09:25:05 by CPU2017 PDF formatter v6716.
Originally published on 2024-07-02.