



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

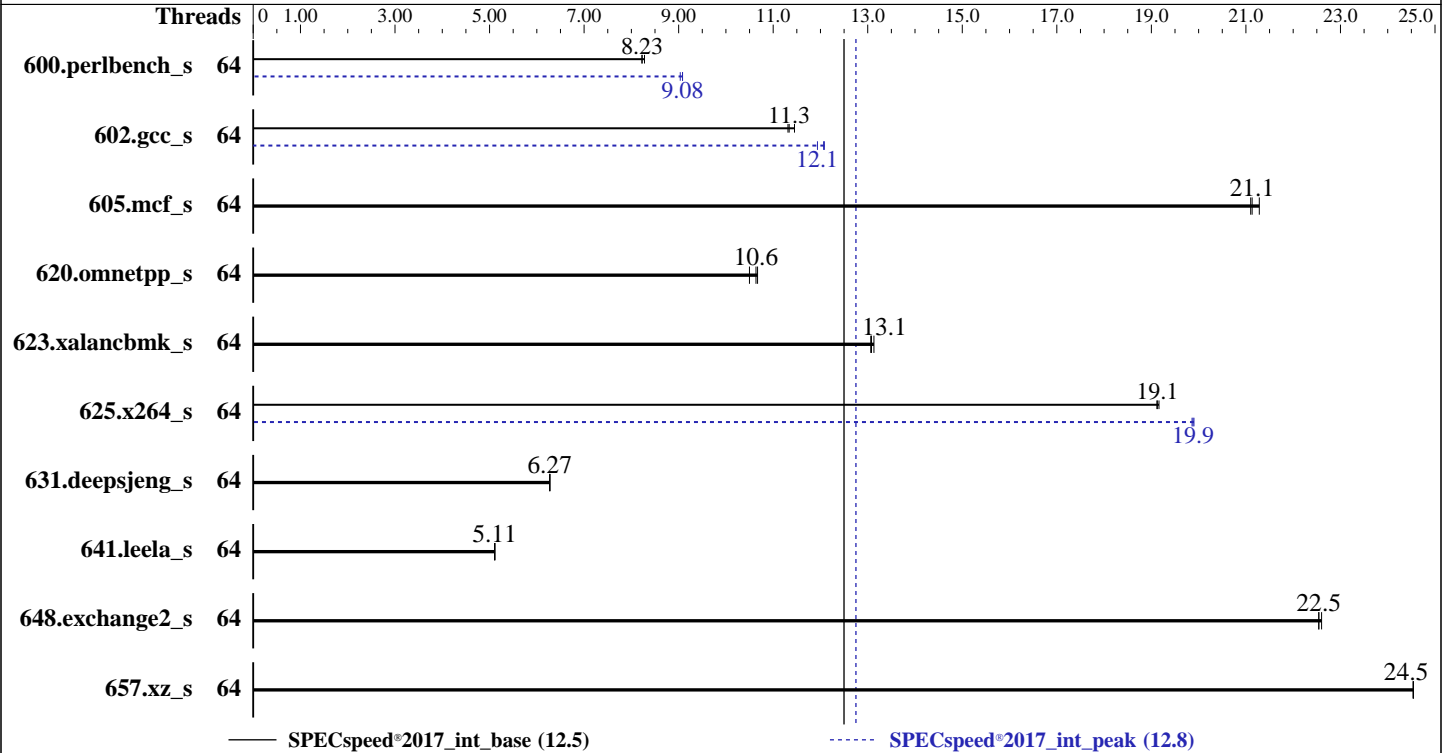

Hardware

CPU Name: Intel Xeon Gold 6430
 Max MHz: 3400
 Nominal: 2100
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 01.02.02.09 Released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	216	8.22	214	8.28	216	8.23	64	195	9.08	195	9.08	196	9.03
602.gcc_s	64	352	11.3	351	11.3	348	11.5	64	334	11.9	330	12.1	330	12.1
605.mcf_s	64	223	21.1	222	21.3	224	21.1	64	223	21.1	222	21.3	224	21.1
620.omnetpp_s	64	155	10.5	153	10.6	153	10.7	64	155	10.5	153	10.6	153	10.7
623.xalancbmk_s	64	108	13.1	108	13.1	108	13.1	64	108	13.1	108	13.1	108	13.1
625.x264_s	64	92.3	19.1	92.2	19.1	92.1	19.2	64	88.6	19.9	88.7	19.9	88.8	19.9
631.deepsjeng_s	64	228	6.27	228	6.28	228	6.27	64	228	6.27	228	6.28	228	6.27
641.leela_s	64	334	5.11	333	5.12	334	5.11	64	334	5.11	333	5.12	334	5.11
648.exchange2_s	64	130	22.5	130	22.5	130	22.6	64	130	22.5	130	22.5	130	22.6
657.xz_s	64	252	24.5	252	24.5	252	24.5	64	252	24.5	252	24.5	252	24.5

SPECspeed®2017_int_base = **12.5**

SPECspeed®2017_int_peak = **12.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu2017/lib/intel64:/home/speccpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes

BIOS configuration:
Performance Profile Set to Load Balance
SNC Set to Disable
Enable LP [Global] Set to Single LP

Sysinfo program /home/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Jun 16 13:01:14 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 252 (252-13.e19_2)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:01:14 up 7 min,  2 users,  load average: 0.00, 0.09, 0.07
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1      12:55   10.00s  1.03s  0.00s  -bash
root     pts/0    12:54   21.00s  0.05s  0.05s  -bash
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2060913
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 2060913
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64
--tune base,peak -o all --define intspeedaffinity --define drop_caches intspeed
runcpu --define default-platform-flags --configfile ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg
--define cores=64 --tune base,peak --output_format all --define intspeedaffinity --define drop_caches
--nopower --runmode speed --tune base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.023/templogs/preenv.intspeed.023.0.log --lognum 023.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6430
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECSpeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

Address sizes:          46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6430
BIOS Model name:      Intel(R) Xeon(R) Gold 6430
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):             2
Stepping:              8
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                        flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

L2	2M	128M	16 Unified	2	2048	1	64
L3	60M	120M	15 Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 257234 MB
node 0 free: 256283 MB
node 1 cpus: 32-63
node 1 size: 258036 MB
node 1 free: 257134 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

9. /proc/meminfo

MemTotal: 527636572 kB

10. who -r

run-level 3 Jun 16 12:54

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sep5 sssd sssd-sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables nvmet nvmmf-autoconnect pesign rdisc rhcd rhsm rhsm-facts rpmdm-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

```
-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 3.40 GHz and 3.40 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
16. tuned-adm active
  Current active profile: throughput-performance
-----
```

```
-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
20. OS release
  From /etc/*-release /etc/*-version
  os-release           Red Hat Enterprise Linux 9.2 (Plow)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

21. Disk information
SPEC is set to: /home/speccpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 372G 194G 179G 53% /home

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: G8600 V7
Product Family: EagleStream

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.02.09
BIOS Date: 03/04/2024

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.5

FusionServer G8600 V7 (Intel Xeon Gold 6430)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-16 01:01:13-0400.
Report generated on 2024-07-03 09:24:25 by CPU2017 PDF formatter v6716.
Originally published on 2024-07-02.