



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Apr-2024

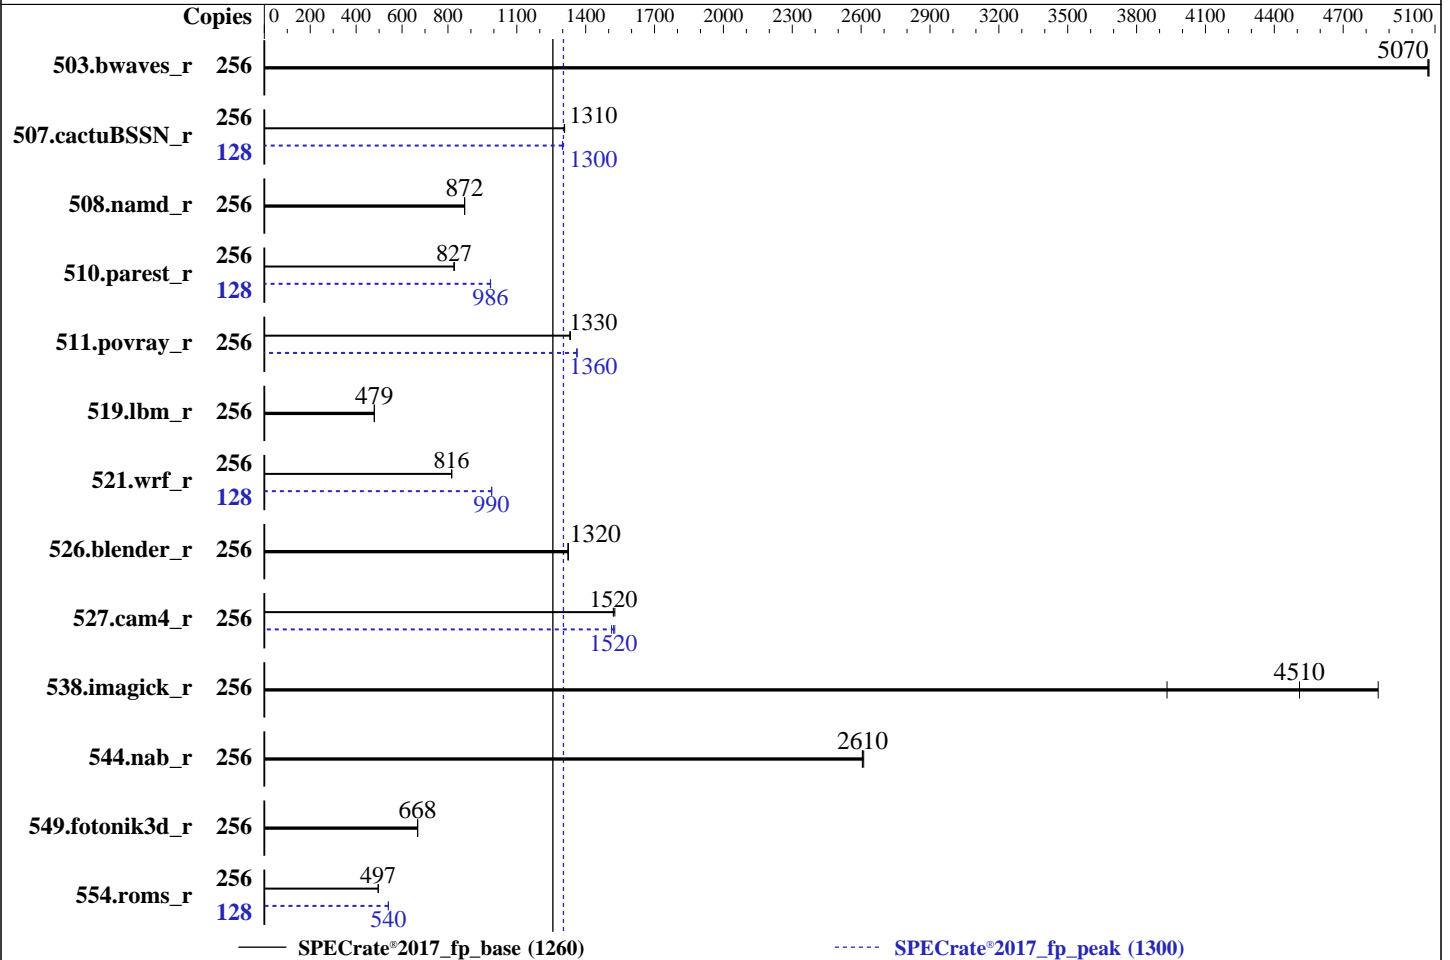

### Hardware

CPU Name: Intel Xeon Platinum 8592+  
 Max MHz: 3900  
 Nominal: 1900  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.01.03.05 Released Apr-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2024  
Hardware Availability: Dec-2023  
Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	506	5070	506	5070	<b>506</b>	<b>5070</b>	256	506	5070	506	5070	<b>506</b>	<b>5070</b>
507.cactuBSSN_r	256	248	1310	<b>248</b>	<b>1310</b>	248	1310	128	125	1300	<b>125</b>	<b>1300</b>	125	1300
508.namd_r	256	279	872	<b>279</b>	<b>872</b>	279	873	256	279	872	<b>279</b>	<b>872</b>	279	873
510.parest_r	256	810	827	809	827	<b>810</b>	<b>827</b>	128	<b>340</b>	<b>986</b>	340	985	340	986
511.povray_r	256	<b>449</b>	<b>1330</b>	448	1330	449	1330	256	<b>439</b>	<b>1360</b>	439	1360	439	1360
519.lbm_r	256	563	479	<b>563</b>	<b>479</b>	563	479	256	563	479	<b>563</b>	<b>479</b>	563	479
521.wrf_r	256	702	816	<b>703</b>	<b>816</b>	703	816	128	290	990	<b>290</b>	<b>990</b>	289	991
526.blender_r	256	<b>295</b>	<b>1320</b>	294	1320	295	1320	256	<b>295</b>	<b>1320</b>	294	1320	295	1320
527.cam4_r	256	293	1530	295	1520	<b>294</b>	<b>1520</b>	256	293	1530	<b>294</b>	<b>1520</b>	296	1510
538.imagick_r	256	162	3930	<b>141</b>	<b>4510</b>	131	4850	256	162	3930	<b>141</b>	<b>4510</b>	131	4850
544.nab_r	256	165	2610	165	2610	<b>165</b>	<b>2610</b>	256	165	2610	165	2610	<b>165</b>	<b>2610</b>
549.fotonik3d_r	256	1493	668	<b>1494</b>	<b>668</b>	1495	667	256	1493	668	<b>1494</b>	<b>668</b>	1495	667
554.roms_r	256	820	496	<b>819</b>	<b>497</b>	819	497	128	<b>376</b>	<b>540</b>	376	541	376	540

SPECrate®2017\_fp\_base = **1260**

SPECrate®2017\_fp\_peak = **1300**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-255

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017\_2024/lib/intel64:/home/cpu2017\_2024/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)  
LLC Prefetch Set to Disabled  
LLC dead line alloc Set to Disabled  
Stale AtoS Set to Disabled

Sysinfo program /home/cpu2017\_2024/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Jun 13 20:30:40 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19\_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.e19\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

```

2. w
  20:30:40 up 2:44, 2 users, load average: 0.22, 0.44, 31.23
USER  TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1    18:04   8.00s  1.38s  0.07s  sh run_rate.sh
root  pts/0   20:16  40.00s  0.05s  0.05s  -bash

```

```

3. Username
   From environment variable $USER:  root

```

```

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2060025
max locked memory            (kbytes, -l) 8192
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 2060025
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
sh run_rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_2024

```

```

6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

physical id 0: core ids 0-63  
physical id 1: core ids 0-63  
physical id 0: apicids 0-127  
physical id 1: apicids 128-255

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 256
On-line CPU(s) list:   0-255
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:       INTEL(R) XEON(R) PLATINUM 8592+
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              2
Stepping:               2
Frequency boost:       enabled
CPU max MHz:            1901.0000
CPU min MHz:            800.0000
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                        ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                        avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                        cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                        dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcndq la57
                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-31,128-159
NUMA node1 CPU(s):    32-63,160-191
NUMA node2 CPU(s):    64-95,192-223
NUMA node3 CPU(s):    96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Mmio stale data: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 128068 MB
node 0 free: 127025 MB
node 1 cpus: 32-63,160-191
node 1 size: 129010 MB
node 1 free: 128131 MB
node 2 cpus: 64-95,192-223
node 2 size: 128970 MB
node 2 free: 128075 MB
node 3 cpus: 96-127,224-255
node 3 size: 128996 MB
node 3 free: 127898 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 527405996 kB

10. who -r

run-level 3 Jun 13 17:46

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

```

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
sep5 sshd sssd sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower

enabled-runtime systemd-remount-fs
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt5)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=e7cclb7d-5946-4ed4-8306-b2d382dc5709
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=937c2e4e-930c-4489-9a6c-cd05c9a2c08a
nohz_full=1-255

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 1.90 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
system-release  Red Hat Enterprise Linux release 9.2 (Plow)
-----

```

```

-----
21. Disk information
SPEC is set to: /home/cpu2017_2024
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   690G 123G 568G 18% /
-----

```

```

-----
22. /sys/devices/virtual/dmi/id
Product:      2288H V7
Product Family: Eagle Stream
-----

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 6x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600
 8x Samsung M321R4GA3PB0-CWMJH 32 GB 2 rank 5600
 2x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600
-----

```

```

-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      INSYDE Corp.
BIOS Version:     01.01.03.05
BIOS Date:        04/12/2024
BIOS Revision:    3.5
-----

```

### Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

### Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Apr-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 1260

FusionServer 2288H V7 (Intel Xeon Platinum 8592+)

SPECrate®2017\_fp\_peak = 1300

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Jun-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Apr-2024

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-13 08:30:39-0400.

Report generated on 2024-07-17 11:46:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-16.