



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573


Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

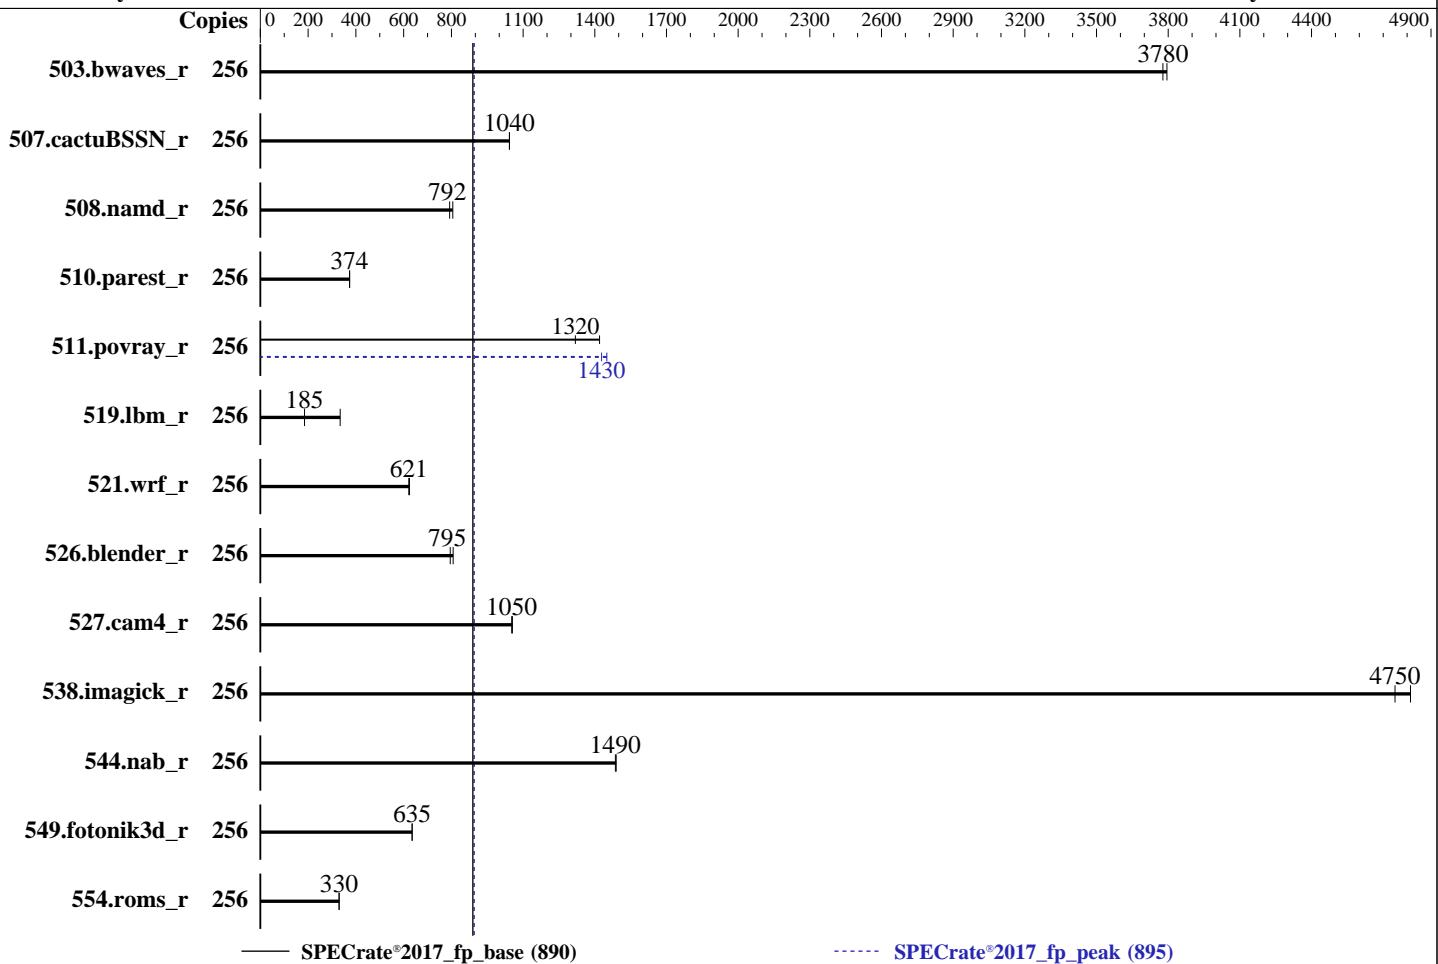

— SPECrate®2017_fp_base (890)

----- SPECrate®2017_fp_peak (895)

Hardware

CPU Name: Intel Xeon 6756E
 Max MHz: 2600
 Nominal: 1800
 Enabled: 256 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 96 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 140 GB on tmpfs
 Other: CPU Cooling: Air

OS:

SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default

Compiler:

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;

Parallel:

No

Firmware:

Version 1.0.1 released Jun-2024

File System:

tmpfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS set to prefer performance at the cost of
 additional power usage.

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	677	3790	680	3780			256	677	3790	680	3780				
507.cactusBSSN_r	256	311	1040	311	1040			256	311	1040	311	1040				
508.namd_r	256	307	792	302	806			256	307	792	302	806				
510.parest_r	256	1792	374	1792	374			256	1792	374	1792	374				
511.povray_r	256	421	1420	453	1320			256	412	1450	419	1430				
519.lbm_r	256	1458	185	807	334			256	1458	185	807	334				
521.wrf_r	256	923	621	919	624			256	923	621	919	624				
526.blender_r	256	483	807	490	795			256	483	807	490	795				
527.cam4_r	256	424	1060	426	1050			256	424	1060	426	1050				
538.imagick_r	256	134	4750	132	4810			256	134	4750	132	4810				
544.nab_r	256	289	1490	290	1490			256	289	1490	290	1490				
549.fotonik3d_r	256	1570	635	1570	635			256	1570	635	1570	635				
554.roms_r	256	1234	330	1233	330			256	1234	330	1233	330				

SPECrate®2017_fp_base = 890

SPECrate®2017_fp_peak = 895

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 140 GB ramdisk created with the cmd: "mount -t tmpfs -o size=140G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

ADDDC Setting : Disabled

DIMM Self Healing on

Uncorrectable Memory Error : Disabled

LLC Prefetch : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

Energy Efficient Turbo : Disabled

C1E : Disabled

C States : Autonomous

Energy Efficiency Policy : Performance

CPU Interconnect Bus

Link Power Management : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on W402103-R770 Sat Jul 6 02:48:58 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux W402103-R770 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
02:48:58 up 4:39, 1 user, load average: 106.97, 211.51, 236.18
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:12 4:32m 2.34s 0.01s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define
DL-BIOS-adddcD=1 --define DL-VERS=5.3.2 --output_format html,pdf,txt

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126325
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126325
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42 linux
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc
--define DL-BIOS-adddcD=1 --define DL-VERS=5.3.2 --output_format html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc
--define DL-BIOS-adddcD=1 --define DL-VERS=5.3.2 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=128 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.2
--output_format html,pdf,txt fprate

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECCrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=128 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1
--define DL-VERS=5.3.2 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log
--lognum 002.0 --from_runcpu
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) 6756E  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 175  
stepping        : 3  
microcode       : 0x30001b3  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi  
cpu cores       : 128  
siblings         : 128  
2 physical ids (chips)  
256 processors (hardware threads)  
physical id 0: core ids 0-127  
physical id 1: core ids 0-127  
physical id 0: apicids  
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72  
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1  
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18  
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236  
,238,240,242,244,246,248,250,252,254  
physical id 1: apicids  
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5  
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61  
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668  
,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720  
,722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         52 bits physical, 48 bits virtual  
Byte Order:             Little Endian  
CPU(s):                256  
On-line CPU(s) list:   0-255  
Vendor ID:              GenuineIntel  
BIOS Vendor ID:        Intel  
Model name:             Intel(R) Xeon(R) 6756E  
BIOS Model name:       Intel(R) Xeon(R) 6756E CPU @ 1.8GHz  
BIOS CPU family:       179  
CPU family:             6  
Model:                  175  
Thread(s) per core:    1  
Core(s) per socket:    128  
Socket(s):              2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

Stepping:

3

BogoMIPS:

3600.00

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12
ssbd mba ibrs ibpb stibrs Enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstx avx_vnni lam wbnoinvd dtherm ida arat
pln pts vnmi umip pku ospkq gfni vaes vpclmulqdq tme rdpid
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_lld arch_capabilities
```

Virtualization:

VT-x

L1d cache:

8 MiB (256 instances)

L1i cache:

16 MiB (256 instances)

L2 cache:

256 MiB (64 instances)

L3 cache:

192 MiB (2 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

```
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48
,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94
,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,13
0,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164
,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198
,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,2
34,236,238,240,242,244,246,248,250,252,254
```

NUMA node1 CPU(s):

```
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49
,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95
,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,13
1,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165
,167,169,171,173,175,177,179,181,183,185,187,189,191,193,195,197,199
,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,2
35,237,239,241,243,245,247,249,251,253,255
```

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Lltf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	64K	16M	8	Instruction	1	128	1	64
L2	4M	256M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus:
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,7
4,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,1
34,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,
188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240
,242,244,246,248,250,252,254
node 0 size: 515658 MB
node 0 free: 512787 MB
node 1 cpus:
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,7
5,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,1
35,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181,183,185,187,
189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241
,243,245,247,249,251,253,255
node 1 size: 515949 MB
node 1 free: 504586 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

```
9. /proc/meminfo
MemTotal: 1056366256 kB
```

```
10. who -r
run-level 3 Jul 5 22:10
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@_
                  irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections
                  nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                  wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
                  gpm grub2-once haveged ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create
                  multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@_ smartd_generate_opts
                  snmpd snmptrapd systemd-boot-check-no-failures systemd-context systemd-network-generator
                  systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect         systemd-userdbd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=ab78c1eb-763f-4bbd-bae6-2e79c83e47d6
linux
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 32:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag              1  
max_ptes_none       511  
max_ptes_shared     256  
max_ptes_swap       64  
pages_to_scan        4096  
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	140G	5.0G	136G	4%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R770
Product Family: PowerEdge
Serial: W402103

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.0.1
BIOS Date: 06/20/2024
BIOS Revision: 1.0

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECCrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Base Portability Flags (Continued)

```
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 890

PowerEdge R770 (Intel Xeon 6756E)

SPECrate®2017_fp_peak = 895

CPU2017 License: 6573

Test Date: Jul-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-06 02:48:57-0400.

Report generated on 2024-07-30 19:30:41 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-30.