



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

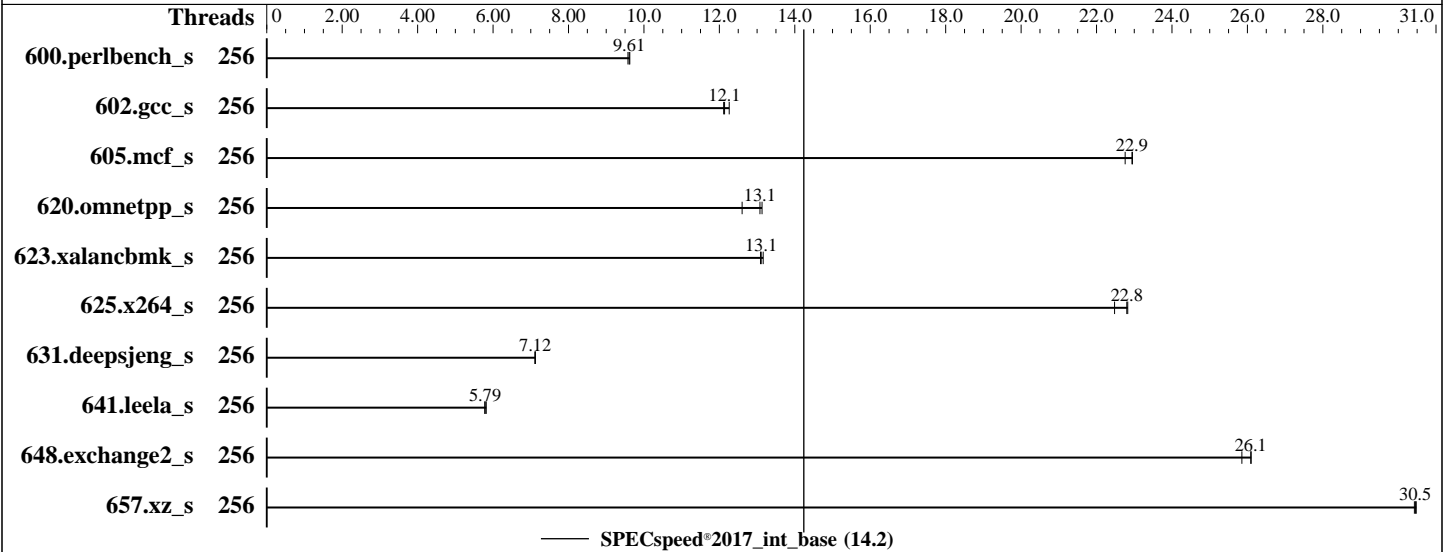

Hardware

CPU Name: Intel Xeon Platinum 8593Q
 Max MHz: 3900
 Nominal: 2200
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: CLC

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 Kernel 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version ESE125H 3.20 released Jun-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	256	184	9.63	185	9.58	185	9.61									
602.gcc_s	256	325	12.3	328	12.1	329	12.1									
605.mcf_s	256	206	23.0	206	22.9	207	22.8									
620.omnetpp_s	256	125	13.1	129	12.6	124	13.1									
623.xalancbmk_s	256	108	13.1	108	13.1	108	13.2									
625.x264_s	256	77.4	22.8	77.3	22.8	78.5	22.5									
631.deepsjeng_s	256	201	7.11	201	7.12	201	7.12									
641.leela_s	256	293	5.82	295	5.78	295	5.79									
648.exchange2_s	256	113	26.1	113	26.1	114	25.9									
657.xz_s	256	203	30.5	203	30.4	203	30.5									

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Jul 14 13:11:24 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:11:24 up 3:21, 1 user, load average: 2.57, 6.43, 4.15
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1      09:51   3:19m  0.80s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```

file size                (blocks, -f) unlimited
pending signals          (-i) 4126816
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 4126816
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.048/templogs/preenv.intspeed.048.0.log --lognum 048.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8593Q
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000240
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

Platform Notes (Continued)

```

On-line CPU(s) list:      0-255
Vendor ID:                GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
Model name:               INTEL(R) XEON(R) PLATINUM 8593Q
BIOS Model name:         INTEL(R) XEON(R) PLATINUM 8593Q
CPU family:               6
Model:                    207
Thread(s) per core:      2
Core(s) per socket:      64
Socket(s):                2
Stepping:                 2
BogoMIPS:                 4400.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                          nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                          ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                          sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                          invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          vmx flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                          erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                          clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                          avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke
                          waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                          avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                          enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                          avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:          VT-x
L1d cache:               6 MiB (128 instances)
L1i cache:               4 MiB (128 instances)
L2 cache:                 256 MiB (128 instances)
L3 cache:                 640 MiB (2 instances)
NUMA node(s):            4
NUMA node0 CPU(s):      0-31,128-159
NUMA node1 CPU(s):      32-63,160-191
NUMA node2 CPU(s):      64-95,192-223
NUMA node3 CPU(s):      96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                          sequence
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 6M 12 Data 1 64 1 64
L1i 32K 4M 8 Instruction 1 64 1 64
L2 2M 256M 16 Unified 2 2048 1 64
L3 320M 640M 20 Unified 3 262144 1 64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 257697 MB
node 0 free: 256012 MB
node 1 cpus: 32-63,160-191
node 1 size: 257994 MB
node 1 free: 257548 MB
node 2 cpus: 64-95,192-223
node 2 size: 258033 MB
node 2 free: 257528 MB
node 3 cpus: 96-127,224-255
node 3 size: 258020 MB
node 3 free: 257282 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056508304 kB

10. who -r

run-level 3 Jul 14 09:51

11. Systemd service manager version: systemd 252 (252-13.el9_2)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
           chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi
           iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
           microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
           selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
           tuned udisks2 upower
enabled-runtime  systemd-remount-fs
disabled        arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
           canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
           dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiui kpatch kvm_stat ledmon
           man-db-restart-cache-update nftables nvme-fc-autoconnect pesign psacct rdisc rhcd rhsm
           rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
           systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
           systemd-sysupdate-reboot

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
  Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
  From /etc/*-release /etc/*-version
  os-release            Red Hat Enterprise Linux 9.2 (Plow)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2024
Hardware Availability: Aug-2024
Software Availability: Mar-2024

Platform Notes (Continued)

redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 83G 736G 11% /home

21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600
8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: ESE125H-3.20
BIOS Date: 06/25/2024
BIOS Revision: 3.20
Firmware Revision: 55.1

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 648.exchange2_s(base)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.2

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-14 13:11:24-0400.

Report generated on 2024-08-07 13:27:39 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-06.