



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

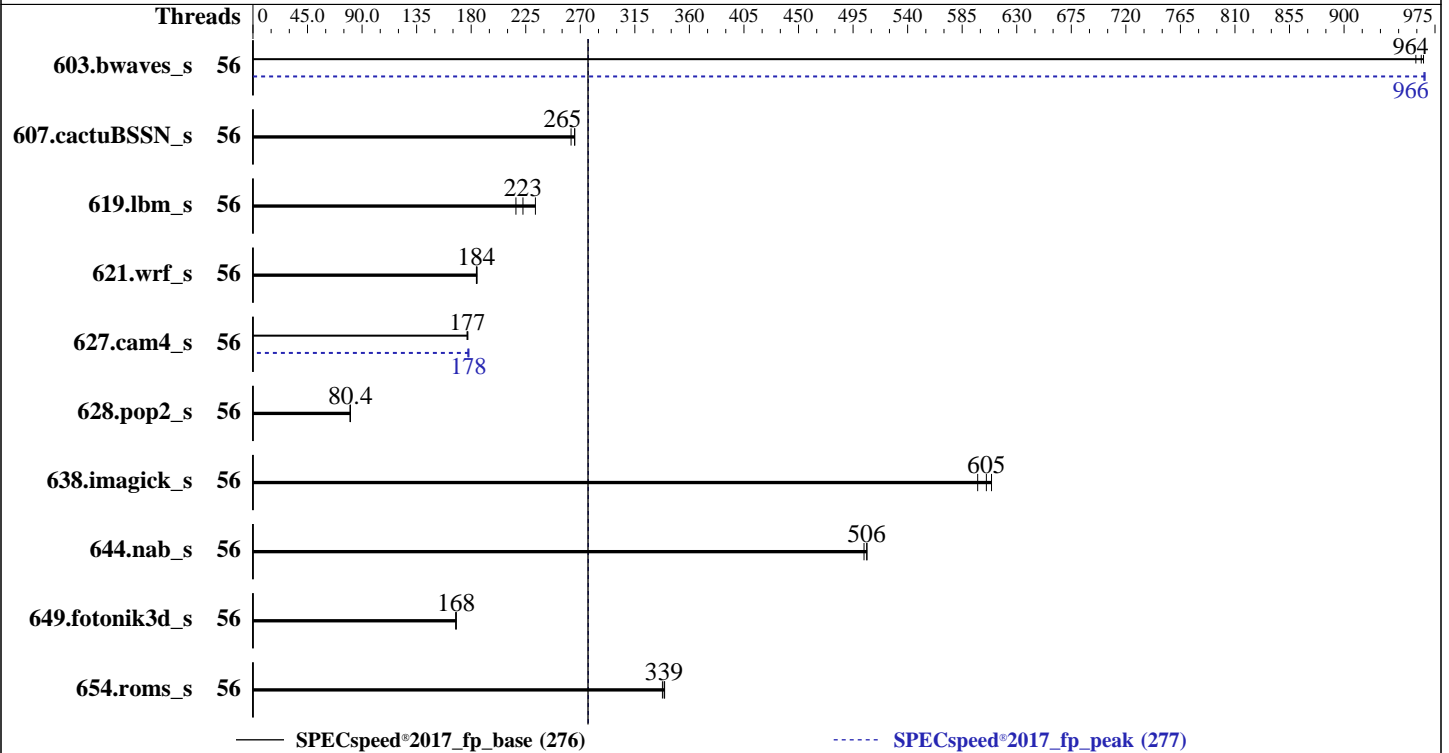

### Hardware

CPU Name: Intel Xeon Gold 5520+  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 52.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVMe  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 5.14.0-362.13.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 2.1 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer  
 performance at cost  
 of additional power.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECSpeed®2017\_fp\_base = 276

SPECSpeed®2017\_fp\_peak = 277

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	61.1	966	61.5	959	<b>61.2</b>	<b>964</b>	56	61.1	966	61.0	967	<b>61.1</b>	<b>966</b>
607.cactuBSSN_s	56	<b>62.8</b>	<b>265</b>	63.5	262	62.8	265	56	<b>62.8</b>	<b>265</b>	63.5	262	62.8	265
619.lbm_s	56	24.1	217	22.5	233	<b>23.5</b>	<b>223</b>	56	24.1	217	22.5	233	<b>23.5</b>	<b>223</b>
621.wrf_s	56	71.5	185	71.8	184	<b>71.7</b>	<b>184</b>	56	71.5	185	71.8	184	<b>71.7</b>	<b>184</b>
627.cam4_s	56	<b>50.1</b>	<b>177</b>	50.0	177	50.2	177	56	<b>49.8</b>	<b>178</b>	50.0	177	49.8	178
628.pop2_s	56	<b>148</b>	<b>80.4</b>	148	80.4	148	80.1	56	<b>148</b>	<b>80.4</b>	148	80.4	148	80.1
638.imagick_s	56	24.1	598	23.7	609	<b>23.8</b>	<b>605</b>	56	24.1	598	23.7	609	<b>23.8</b>	<b>605</b>
644.nab_s	56	<b>34.5</b>	<b>506</b>	34.5	506	34.7	504	56	<b>34.5</b>	<b>506</b>	34.5	506	34.7	504
649.fotonik3d_s	56	54.5	167	<b>54.4</b>	<b>168</b>	54.4	168	56	54.5	167	<b>54.4</b>	<b>168</b>	54.4	168
654.roms_s	56	46.6	338	46.4	340	<b>46.4</b>	<b>339</b>	56	46.6	338	46.4	340	<b>46.4</b>	<b>339</b>

SPECSpeed®2017\_fp\_base = 276

SPECSpeed®2017\_fp\_peak = 277

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 277

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## General Notes (Continued)

system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Power Technology = Custom  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
KTI Prefetch = Enable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri Aug 16 09:51:29 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.el9)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
09:51:29 up 1 day, 23:00, 1 user, load average: 6.06, 6.16, 3.73  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
xeon tty1 Wed10 3:13m 0.79s 0.03s login -- xeon  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200A3N-212**  
 (2.20 GHz, Intel Xeon Gold 5520+)

**SPECSpeed®2017\_fp\_base = 276**  
**SPECSpeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: xeon

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126578
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126578
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- xeon
-bash
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=56 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=56 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 5520+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 28
siblings       : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

**SPECspeed®2017\_fp\_base = 276**

**SPECspeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:              INTEL(R) XEON(R) GOLD 5520+
BIOS Model name:        INTEL(R) XEON(R) GOLD 5520+
CPU family:              6
Model:                  207
Thread(s) per core:     2
Core(s) per socket:     28
Socket(s):               2
Stepping:                2
Frequency boost:        enabled
CPU max MHz:             2201.0000
CPU min MHz:             800.0000
BogoMIPS:                4400.00
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bm1l avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpoperndq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd frsm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:         VT-x
L1d cache:              2.6 MiB (56 instances)
L1i cache:              1.8 MiB (56 instances)
L2 cache:               112 MiB (56 instances)
L3 cache:               105 MiB (2 instances)
NUMA node(s):           2
NUMA node0 CPU(s):     0-27,56-83
NUMA node1 CPU(s):     28-55,84-111
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability Lltf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	52.5M	105M	15	Unified	3	57344	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-27,56-83
node 0 size: 515634 MB
node 0 free: 480114 MB
node 1 cpus: 28-55,84-111
node 1 size: 516076 MB
node 1 free: 476762 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo

MemTotal: 1056471424 kB

10. who -r

run-level 3 Aug 14 10:50

11. Systemd service manager version: systemd 252 (252-18.el9)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger
power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update
systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server
gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch
kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named
named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvmmf-autoconnect
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

**SPECspeed®2017\_fp\_base = 276**

**SPECspeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@ systemd-pstore systemd-sysextr target targetclid tog-pegasus trace-cmd
virtinterfaced virtnetworkd virtnodevd virtnwfilterd virtproxyd virtsecret d virtstorage d
vsftpd wpa_supplicant
indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 2.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

**SPECspeed®2017\_fp\_base = 276**  
**SPECspeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release Red Hat Enterprise Linux release 9.3 (Plow)
system-release Red Hat Enterprise Linux release 9.3 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  856G  674G  182G  79% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          Tyrone Systems
Product:         Tyrone Camarero SDI200A3N-212
Product Family: Family
Serial:          2X26452301
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Tyrone Systems
BIOS Version:     2.1
BIOS Date:        12/07/2023
BIOS Revision:    5.32
-----
```

## Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

**SPECspeed®2017\_fp\_base = 276**  
**SPECspeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

**SPECSpeed®2017\_fp\_base = 276**

**SPECSpeed®2017\_fp\_peak = 277**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
Tyrone Camarero SDI200A3N-212  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 277

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero SDI200A3N-212**  
(2.20 GHz, Intel Xeon Gold 5520+)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 277

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

627.cam4\_s (continued):

```
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-16 00:21:29-0400.

Report generated on 2024-09-11 09:33:00 by CPU2017 PDF formatter v6716.

Originally published on 2024-09-10.