



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation


**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

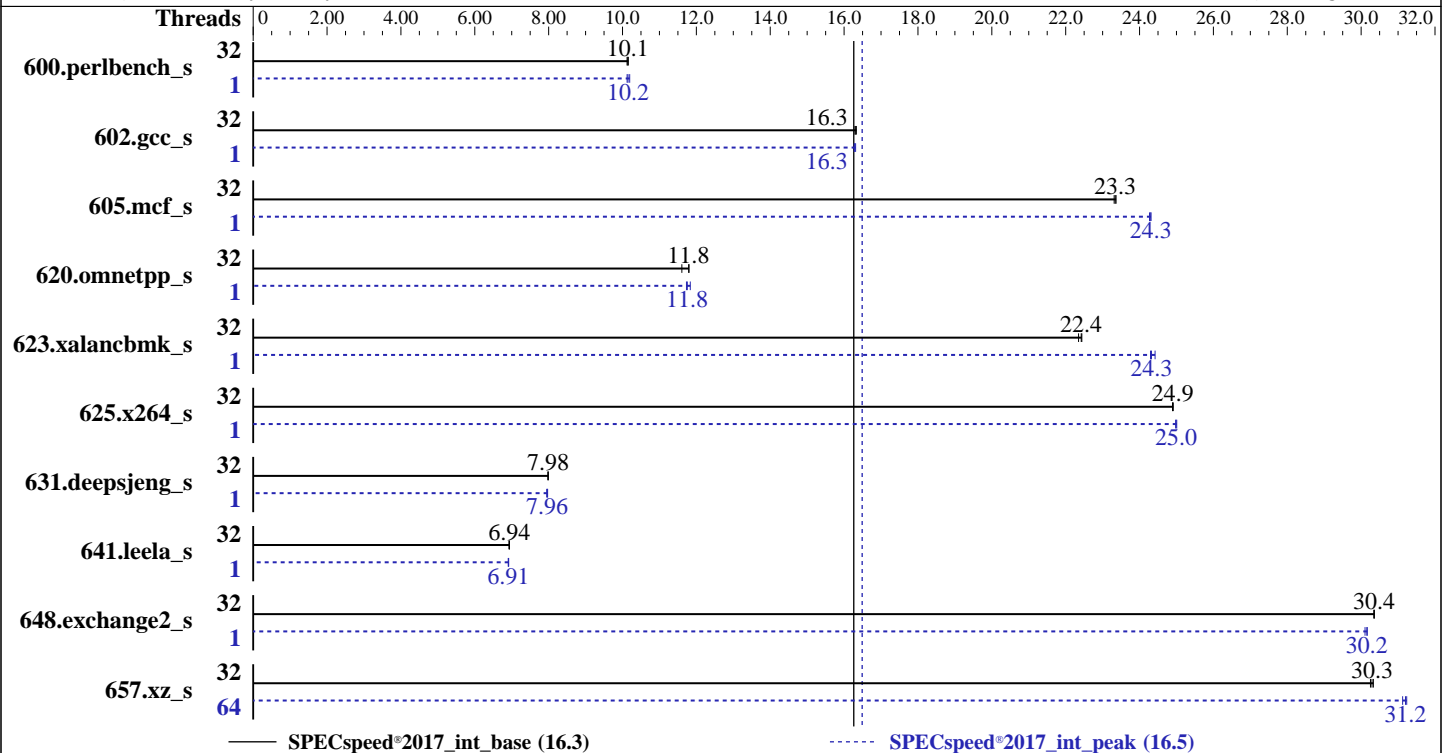

## Hardware

CPU Name: AMD EPYC 9174F  
Max MHz: 4400  
Nominal: 4100  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1 TB NVMe  
Other: CPU Cooling: Air

## Software

OS: Ubuntu 20.04.4 LTS  
kernel version 5.15.0-119-generic  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 1.9a released Jun-2024  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	175	10.1	175	10.2	<b><u>175</u></b>	<b><u>10.1</u></b>	1	<b><u>175</u></b>	<b><u>10.2</u></b>	174	10.2	175	10.1
602.gcc_s	32	244	16.3	<b><u>244</u></b>	<b><u>16.3</u></b>	244	16.3	1	245	16.3	244	16.3	<b><u>244</u></b>	<b><u>16.3</u></b>
605.mcf_s	32	203	23.3	<b><u>202</u></b>	<b><u>23.3</u></b>	202	23.4	1	<b><u>194</u></b>	<b><u>24.3</u></b>	194	24.3	195	24.3
620.omnetpp_s	32	138	11.8	141	11.6	<b><u>138</u></b>	<b><u>11.8</u></b>	1	<b><u>139</u></b>	<b><u>11.8</u></b>	139	11.7	138	11.8
623.xalancbmk_s	32	63.2	22.4	63.4	22.3	<b><u>63.2</u></b>	<b><u>22.4</u></b>	1	58.3	24.3	58.0	24.4	<b><u>58.3</u></b>	<b><u>24.3</u></b>
625.x264_s	32	<b><u>70.8</u></b>	<b><u>24.9</u></b>	70.9	24.9	70.8	24.9	1	<b><u>70.6</u></b>	<b><u>25.0</u></b>	70.6	25.0	70.5	25.0
631.deepsjeng_s	32	179	7.99	179	7.98	<b><u>179</u></b>	<b><u>7.98</u></b>	1	180	7.95	180	7.97	<b><u>180</u></b>	<b><u>7.96</u></b>
641.leela_s	32	246	6.93	<b><u>246</u></b>	<b><u>6.94</u></b>	246	6.94	1	<b><u>247</u></b>	<b><u>6.91</u></b>	247	6.91	247	6.92
648.exchange2_s	32	96.9	30.4	<b><u>96.9</u></b>	<b><u>30.4</u></b>	96.9	30.3	1	<b><u>97.5</u></b>	<b><u>30.2</u></b>	97.5	30.2	97.7	30.1
657.xz_s	32	204	30.3	<b><u>204</u></b>	<b><u>30.3</u></b>	204	30.3	64	198	31.2	199	31.1	<b><u>198</u></b>	<b><u>31.2</u></b>

SPECspeed®2017\_int\_base = **16.3**

SPECspeed®2017\_int\_peak = **16.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
cTDP: 400

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Platform Notes (Continued)

Determinism Slider set to Power  
Package Power: 400  
EDC: 400  
ACPI SRAT L3 Cache as NUMA Domain: enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd2-Super-Server Sat Aug 31 07:02:57 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux amd2-Super-Server 5.15.0-119-generic #129~20.04.1-Ubuntu SMP Wed Aug 7 13:07:13 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
07:02:57 up 17:51, 1 user, load average: 0.08, 0.03, 0.00
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -             Fri13    8.00s  1.81s  0.44s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Platform Notes (Continued)

```
memory(kbytes)      unlimited
locked memory(kbytes) 2097152
process              4126730
nofiles              1024
vmemory(kbytes)     unlimited
locks                unlimited
rtprio               0
```

```
-----
5. sysinfo process ancestry
/sbin/init splash
/bin/login -p --
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9174F 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57
physical id 1: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 1: apicids 128-131,144-147,160-163,176-179,192-195,208-211,224-227,240-243
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.34:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          52 bits physical, 57 bits virtual
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  17
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
(Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

## Platform Notes (Continued)

```

Model name: AMD EPYC 9174F 16-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 1567.943
CPU max MHz: 4408.2998
CPU min MHz: 1500.0000
BogoMIPS: 8187.18
Virtualization: AMD-V
L1d cache: 1 MiB
L1i cache: 1 MiB
L2 cache: 32 MiB
L3 cache: 512 MiB
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1
sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd
mba ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	1M	32M	8	Unified	2
L3	32M	512M	16	Unified	3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Platform Notes (Continued)

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 128712 MB
node 0 free: 128300 MB
node 1 cpus: 4-7,36-39
node 1 size: 129021 MB
node 1 free: 128608 MB
node 2 cpus: 8-11,40-43
node 2 size: 129021 MB
node 2 free: 128599 MB
node 3 cpus: 12-15,44-47
node 3 size: 129021 MB
node 3 free: 128504 MB
node 4 cpus: 16-19,48-51
node 4 size: 129021 MB
node 4 free: 128667 MB
node 5 cpus: 20-23,52-55
node 5 size: 129021 MB
node 5 free: 128651 MB
node 6 cpus: 24-27,56-59
node 6 size: 128974 MB
node 6 free: 128682 MB
node 7 cpus: 28-31,60-63
node 7 size: 128974 MB
node 7 free: 128591 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10
-----

```

```

9. /proc/meminfo
MemTotal:      1056532744 kB
-----

```

```

10. who -r
run-level 3 Aug 30 13:12
-----

```

```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
Default Target    Status
multi-user        degraded
-----

```

```

12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service             loaded failed failed Refresh fwupd metadata and update motd
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
* snapd.apparmor.service             loaded failed failed Load AppArmor profiles managed internally by
snapd
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Platform Notes (Continued)

```
-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw
unattended-upgrades whoopsie wpa_supplicant

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@
rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
wpa_supplicant-wired@ wpa_supplicant@

generated apport ipmidrv openipmi
indirect display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
sudo x11-common
-----
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-119-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
splash
vt.handoff=7
-----
```

```
-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Platform Notes (Continued)

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

18. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 20.04.4 LTS  
-----

19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 ext4 938G 21G 870G 3% /  
-----

20. /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero SDA200A2N-212  
Product Family: SMC H13  
Serial: 0123456789  
-----

21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x NO DIMM NO DIMM  
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.9a  
BIOS Date: 06/21/2024  
BIOS Revision: 5.27  
-----

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

## Compiler Version Notes (Continued)

-----  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802

**Test Sponsor:** Netweb Technologies India Ltd

**Tested by:** Tyrone Systems

**Test Date:** Aug-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Aug-2024

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

### C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

### C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

### C++ benchmarks:

```
-Wno-unused-command-line-argument
```

### Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

## Peak Optimization Flags (Continued)

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Technologies India Ltd)  
( Tyrone Camarero SDA200A2W-212)  
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017\_int\_base = 16.3

SPECspeed®2017\_int\_peak = 16.5

**CPU2017 License:** 6802  
**Test Sponsor:** Netweb Technologies India Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Aug-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Aug-2024

## Peak Other Flags

C benchmarks:  
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:  
-Wno-unused-command-line-argument

Fortran benchmarks:  
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-30 21:32:57-0400.  
Report generated on 2024-09-25 09:17:25 by CPU2017 PDF formatter v6716.  
Originally published on 2024-09-24.