



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

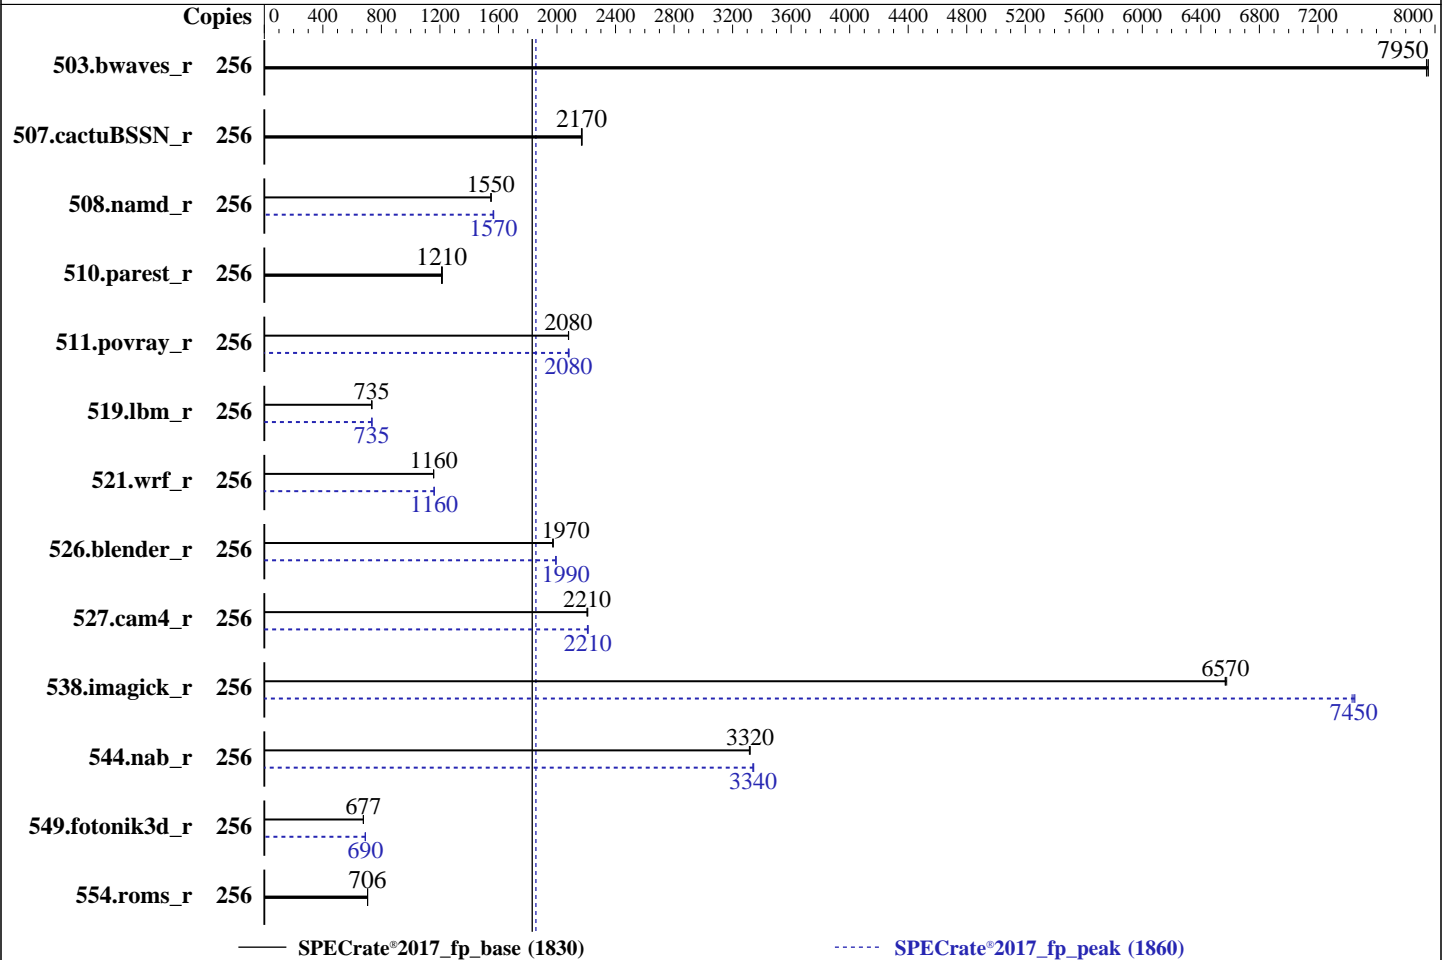

### Hardware

CPU Name: AMD EPYC 9745  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 256 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 16 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
 Storage: 1 x 1.92 TB NVMe SSD  
 Other: CPU Cooling: DLC

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 Kernel 5.14.0-427.22.1.el9\_4.x86\_64  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version QGE131Q 6.10 released Sep-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	323	7950	323	7940	<b>323</b>	<b>7950</b>	256	323	7950	323	7940	<b>323</b>	<b>7950</b>
507.cactuBSSN_r	256	<b>149</b>	<b>2170</b>	149	2170	150	2170	256	<b>149</b>	<b>2170</b>	149	2170	150	2170
508.namd_r	256	157	1550	157	1550	<b>157</b>	<b>1550</b>	256	<b>155</b>	<b>1570</b>	155	1570	156	1560
510.parest_r	256	553	1210	<b>552</b>	<b>1210</b>	550	1220	256	553	1210	<b>552</b>	<b>1210</b>	550	1220
511.povray_r	256	288	2080	<b>288</b>	<b>2080</b>	287	2080	256	<b>288</b>	<b>2080</b>	287	2080	288	2080
519.lbm_r	256	368	733	<b>367</b>	<b>735</b>	367	735	256	<b>367</b>	<b>735</b>	367	735	367	735
521.wrf_r	256	<b>496</b>	<b>1160</b>	495	1160	496	1160	256	494	1160	<b>494</b>	<b>1160</b>	494	1160
526.blender_r	256	<b>198</b>	<b>1970</b>	197	1970	198	1970	256	<b>196</b>	<b>1990</b>	196	1990	196	1990
527.cam4_r	256	<b>203</b>	<b>2210</b>	203	2210	203	2210	256	203	2210	202	2210	<b>203</b>	<b>2210</b>
538.imagick_r	256	96.8	6580	<b>96.9</b>	<b>6570</b>	97.0	6570	256	<b>85.5</b>	<b>7450</b>	85.6	7430	85.4	7450
544.nab_r	256	130	3320	130	3310	<b>130</b>	<b>3320</b>	256	<b>129</b>	<b>3340</b>	129	3340	129	3340
549.fotonik3d_r	256	1475	677	1473	677	<b>1473</b>	<b>677</b>	256	1444	691	1447	690	<b>1445</b>	<b>690</b>
554.roms_r	256	576	706	577	706	<b>577</b>	<b>706</b>	256	576	706	577	706	<b>577</b>	<b>706</b>

SPECrate®2017\_fp\_base = **1830**

SPECrate®2017\_fp\_peak = **1860**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/SPECCPU/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/home/SPECCPU/cpu
    2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA Nodes per Socket set to NPS4

SMT Mode set to Disabled

L1 Stride Prefetcher set to Disabled

Sysinfo program /home/SPECCPU/cpu2017-1.1.9-amd-aocc500\_znver5\_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on Portofino-net-1 Sun Sep 22 16:36:36 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 252 (252-32.e19_4)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 1830

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Date:** Sep-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Nov-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux Portofino-net-1 5.14.0-427.22.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Jun 10 09:23:36 EDT 2024
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 16:36:36 up 2 min,  2 users,  load average: 0.12, 0.10, 0.04
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      ttyl    16:36   20.00s  1.25s  0.30s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root      pts/0   16:35   9.00s   0.00s  0.00s  -bash

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 6188366
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 6188366
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./autorunspecCPU.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.023/templogs/preenv.fprate.023.0.log --lognum 023.0 --from_runcpu 2

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/SPECCPU/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9745 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101021
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 128
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9745 128-Core Processor
BIOS Model name:      AMD EPYC 9745 128-Core Processor
CPU family:           26
Model:                17
Thread(s) per core:   1
Core(s) per socket:   128
Socket(s):            2
Stepping:              0
BogoMIPS:             4800.28
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                      lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                      aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                      x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
                      extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
                      wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                      cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                      ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                      clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                      avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
                      cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                      decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

### Platform Notes (Continued)

v\_spec\_ctrl vmni avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes  
vpc1mulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid  
bus\_lock\_detect movdiri movdir64b overflow\_recov succor smca fsmr  
avx512\_vp2intersect flush\_lld debug\_swap

Virtualization:

AMD-V  
L1d cache: 12 MiB (256 instances)  
L1i cache: 8 MiB (256 instances)  
L2 cache: 256 MiB (256 instances)  
L3 cache: 512 MiB (16 instances)  
NUMA node(s): 8  
NUMA node0 CPU(s): 0-31  
NUMA node1 CPU(s): 32-63  
NUMA node2 CPU(s): 64-95  
NUMA node3 CPU(s): 96-127  
NUMA node4 CPU(s): 128-159  
NUMA node5 CPU(s): 160-191  
NUMA node6 CPU(s): 192-223  
NUMA node7 CPU(s): 224-255

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP disabled, RSB filling, PBR SB-eIBRS Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0-31  
node 0 size: 192571 MB  
node 0 free: 191391 MB  
node 1 cpus: 32-63  
node 1 size: 193527 MB  
node 1 free: 192526 MB  
node 2 cpus: 64-95  
node 2 size: 193527 MB  
node 2 free: 192769 MB  
node 3 cpus: 96-127  
node 3 size: 193527 MB  
node 3 free: 192233 MB  
node 4 cpus: 128-159  
node 4 size: 193527 MB  
node 4 free: 192878 MB  
node 5 cpus: 160-191

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

node 5 size: 193527 MB
node 5 free: 192869 MB
node 6 cpus: 192-223
node 6 size: 193486 MB
node 6 free: 192829 MB
node 7 cpus: 224-255
node 7 size: 193434 MB
node 7 free: 192784 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
MemTotal:      1584263040 kB

```

```

-----
10. who -r
run-level 3 Sep 23 00:34

```

```

-----
11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target  Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
               dbus-broker getty@ insights-client-boot kdump low-memory-monitor lvm2-monitor mdmonitor
               microcode nis-domainname nvme-fc-boot-connections openibd rhsmcertd rshim rsyslog
               rtkit-daemon selinux-autorelabel-mark sshd sssd sysstat systemd-boot-update
               systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower
               debug-shell dnf-system-upgrade hwloc-dump-hwdata ibacm kvm_stat
               man-db-restart-cache-update nftables nvme-autoconnect opensmd opensmd@ pesign rdisc rhcd
               rhsm rhsm-facts rpmdm-rebuild selinux-check-proper-disable serial-getty@ srp_daemon
               srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
               systemd-sysupdate-reboot
masked         firewallld irqbalance

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-427.22.1.el9_4.x86_64
root=/dev/mapper/rhel-root00
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap00
rd.lvm.lv=rhel/root00
rd.lvm.lv=rhel/swap00

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

-----
14. cpupower frequency-info
analyzing CPU 223:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 44800MHz

-----
15. tuned-adm active
  Current active profile: throughput-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

### Platform Notes (Continued)

system-release Red Hat Enterprise Linux release 9.4 (Plow)

#### 20. Disk information

SPEC is set to: /home/SPECCPU/cpu2017-1.1.9-amd-aocc500\_znver5\_A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home00 xfs 1.7T 26G 1.7T 2% /home

#### 21. /sys/devices/virtual/dmi/id

Vendor: Lenovo  
Product: ThinkSystem SD665 V3  
Product Family: ThinkSystem  
Serial: 1234567890

#### 22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

##### Memory:

6x SK Hynix HMC94AHBRA275N 64 GB 2 rank 6400, configured at 6000  
2x SK Hynix HMC94AHBRA277N 64 GB 2 rank 6400, configured at 6000  
8x SK Hynix HMC94AHBRA281N 64 GB 2 rank 6400, configured at 6000  
8x SK Hynix HMC94AHBRA283N 64 GB 2 rank 6400, configured at 6000

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: QGE131Q-6.10  
BIOS Date: 09/09/2024  
BIOS Revision: 6.10  
Firmware Revision: 8.10

### Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

### Compiler Version Notes (Continued)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

### Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

508.namd\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

527.cam4\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017\_fp\_base = 1830

SPECrate®2017\_fp\_peak = 1860

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Peak Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-22 04:36:36-0400.

Report generated on 2024-10-10 09:53:47 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.