



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base = 19.1

SPECspeed®2017_int_energy_base = 319

SPECspeed®2017_int_peak = 20.0

SPECspeed®2017_int_energy_peak = 330

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

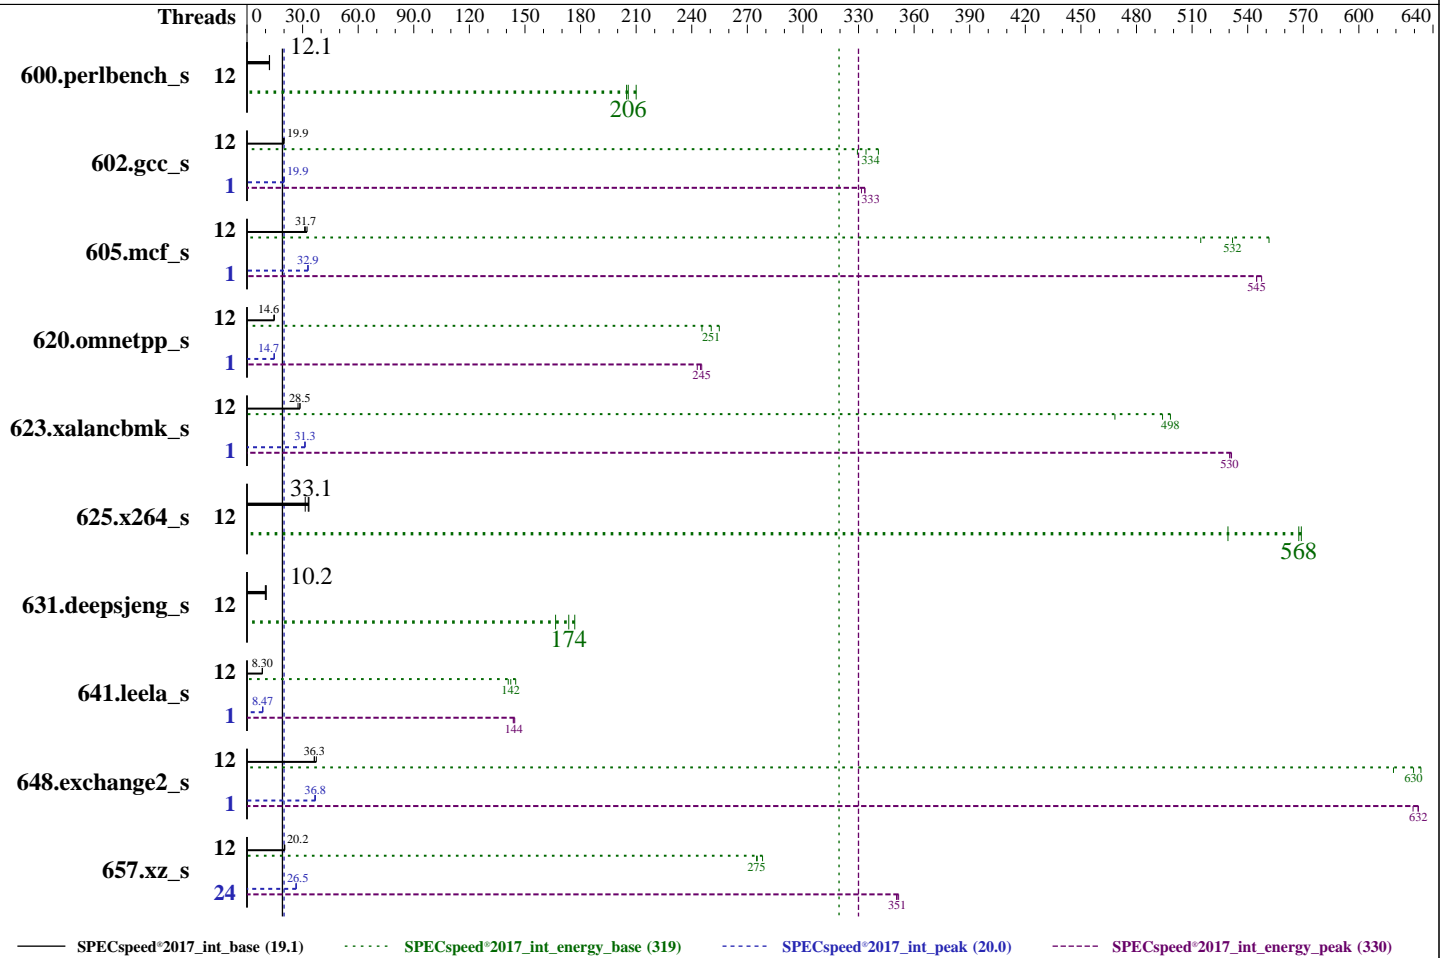

Hardware

CPU Name: AMD EPYC 4464P
 Max MHz: 5600
 Nominal: 4700
 Enabled: 12 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 5200)
 Storage: 1 x 960GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version QIE101S 1.10 released Aug-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: OS set to balance power and performance



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Power

Max. Power (W): 95.97
Idle Power (W): 29.8
Min. Temperature (C): 24.75
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: None
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 300 W (non-redundant)
Details: ATX-300W Power Supply
BMFL
Backplane: None
Other Storage: None
Storage Model #: 4XB7A82275
NICs Installed: 1 x ThinkSystem 2-port embedded @ 1 Gb
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: Two fixed system fans (front drive bay and rear)

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3SH31009E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: CEPREI Calibration and Testing Centre
Calibration Label: 1GA24011968-0005
Calibration Date: 27-Sep-2024
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: Connected to PSU1
Current Ranges Used: 1A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.peribench_s	12	146	12.2	9.17	210	62.9	63.7	147	12.1	9.40	205	64.0	65.1	146	12.1	9.36	206	63.9	64.6
602.gcc_s	12	199	20.0	12.7	341	63.8	68.9	202	19.7	13.1	329	65.1	72.2	200	19.9	13.0	334	64.7	70.8
605.mcf_s	12	146	32.4	9.34	552	64.1	65.5	152	31.1	10.0	515	65.9	69.9	149	31.7	9.68	532	64.9	66.4
620.omnetpp_s	12	112	14.6	7.08	251	63.4	65.3	112	14.6	7.23	246	64.7	66.3	111	14.8	6.96	255	63.0	65.6
623.xalancbmk_s	12	49.5	28.6	3.11	494	62.9	67.5	51.5	27.5	3.29	468	63.8	66.8	49.6	28.5	3.09	498	62.2	68.0
625.x264_s	12	53.4	33.1	3.38	568	63.4	65.7	56.2	31.4	3.63	529	64.6	66.0	52.8	33.4	3.37	569	63.9	65.6
631.deepsjeng_s	12	139	10.3	8.81	177	63.4	64.4	145	9.89	9.35	167	64.5	67.2	140	10.2	8.97	174	64.1	65.2
641.leela_s	12	204	8.36	12.7	145	62.5	64.2	206	8.30	13.0	142	63.1	64.0	208	8.22	13.1	141	63.1	64.8
648.exchange2_s	12	78.6	37.4	5.05	633	64.3	65.2	80.9	36.3	5.17	619	63.9	64.7	80.9	36.3	5.08	630	62.8	63.5
657.xz_s	12	303	20.4	24.2	278	79.9	93.9	307	20.1	24.5	275	79.7	93.7	306	20.2	24.5	275	80.0	94.3

SPECSpeed®2017_int_base = 19.1

SPECSpeed®2017_int_energy_base = 319

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	12	146	12.2	9.17	210	62.9	63.7	147	12.1	9.40	205	64.0	65.1	146	12.1	9.36	206	63.9	64.6
602.gcc_s	1	200	19.9	13.1	332	65.3	70.3	200	19.9	13.0	333	64.9	70.6	200	20.0	13.0	333	65.1	70.0
605.mcf_s	1	144	32.9	9.45	545	65.9	68.0	144	32.9	9.41	548	65.5	67.5	144	32.9	9.45	545	65.9	67.9
620.omnetpp_s	1	112	14.6	7.30	243	65.4	66.3	111	14.7	7.25	245	65.5	66.5	111	14.7	7.23	245	65.3	66.1
623.xalancbmk_s	1	45.4	31.2	2.90	531	63.9	68.1	45.3	31.3	2.90	530	64.1	68.2	45.3	31.3	2.90	531	64.0	68.6
625.x264_s	12	53.4	33.1	3.38	568	63.4	65.7	56.2	31.4	3.63	529	64.6	66.0	52.8	33.4	3.37	569	63.9	65.6
631.deepsjeng_s	12	139	10.3	8.81	177	63.4	64.4	145	9.89	9.35	167	64.5	67.2	140	10.2	8.97	174	64.1	65.2
641.leela_s	1	201	8.47	12.9	144	63.8	64.5	201	8.48	12.8	144	63.6	64.4	201	8.47	12.8	144	63.7	64.4
648.exchange2_s	1	79.8	36.8	5.06	632	63.4	64.5	79.7	36.9	5.06	632	63.5	64.3	80.3	36.6	5.08	629	63.3	64.2
657.xz_s	24	233	26.5	19.2	351	82.3	95.4	233	26.5	19.2	351	82.3	96.0	233	26.6	19.1	352	82.3	95.4

SPECSpeed®2017_int_peak = 20.0

SPECSpeed®2017_int_energy_peak = 330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-23"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "24"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Oct 17 15:05:58 2024
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base =	19.1
SPECspeed®2017_int_energy_base =	319
SPECspeed®2017_int_peak =	20.0
SPECspeed®2017_int_energy_peak =	330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:05:58 up 1:00, 1 user, load average: 0.23, 6.46, 14.85
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.30.81.2 14:06 22.00s 1.10s 0.04s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 253418
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base =	19.1
SPECSpeed®2017_int_energy_base =	319
SPECSpeed®2017_int_peak =	20.0
SPECSpeed®2017_int_energy_peak =	330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```
cpu time           (seconds, -t) unlimited
max user processes (-u) 253418
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/bash ./03.local_run_SPECCpu.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --power --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --power --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --runmode
speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.058/templogs/preenv.intspeed.058.0.log --lognum 058.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 4464P 12-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 97
stepping       : 2
microcode      : 0xa601206
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size       : 3584 4K pages
cpu cores      : 12
siblings       : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-5,8-13
physical id 0: apicids 0-11,16-27
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 4464P 12-Core Processor
BIOS Model name:      AMD EPYC 4464P 12-Core Processor
BIOS CPU family:      107
None CPU @ 3.7GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU family:                25
Model:                      97
Thread(s) per core:        2
Core(s) per socket:        12
Socket(s):                  1
Stepping:                   2
Frequency boost:           enabled
CPU(s) scaling MHz:        55%
CPU max MHz:                5481.3472
CPU min MHz:                3000.0000
BogoMIPS:                   7385.66
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor sse3 fma cx16
                             sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                             invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc
                             arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                             decodeassists pausefilter pfthreshold avic v_omsave_vmload vgif
                             x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid
                             overflow_recov succor smca flush_lld

Virtualization:            AMD-V
L1d cache:                 384 KiB (12 instances)
L1i cache:                 384 KiB (12 instances)
L2 cache:                  12 MiB (12 instances)
L3 cache:                  64 MiB (2 instances)
NUMA node(s):              1
NUMA node0 CPU(s):         0-23
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS; IBPB conditional; STIBP
                             always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	384K	8	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	1M	12M	8	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

L3 32M 64M 16 Unified 3 32768 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-23
node 0 size: 63404 MB
node 0 free: 62784 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 64926696 kB
```

10. who -r

```
run-level 3 Oct 17 14:06
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore tuned wickd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=89a766c1-c11a-42be-be76-94e9ae8b20b1
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 21:
current policy: frequency should be within 3.00 GHz and 3.70 GHz.
The governor "conservative" may decide which speed to use
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem ST45 V3 (4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base = 19.1
SPECspeed®2017_int_energy_base = 319
SPECspeed®2017_int_peak = 20.0
SPECspeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

within this range.

boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: desktop

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base = 19.1
SPECspeed®2017_int_energy_base = 319
SPECspeed®2017_int_peak = 20.0
SPECspeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

/dev/sda3 xfs 893G 94G 800G 11% /

21. /sys/devices/virtual/dmi/id
Vendor: LENOVO
Product: ThinkSystem ST45 V3
Product Family: ThinkSystem
Serial: INVALID

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
2x SK Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: LENOVO
BIOS Version: QIE101S-1.10
BIOS Date: 08/28/2024
BIOS Revision: 1.10
Firmware Revision: 12.65
ST45 V3 CPU performance result based on 65W maximum consumption limit.

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base = 19.1
SPECspeed®2017_int_energy_base = 319
SPECspeed®2017_int_peak = 20.0
SPECspeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: basepeak = yes

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECSpeed®2017_int_base = 19.1
SPECSpeed®2017_int_energy_base = 319
SPECSpeed®2017_int_peak = 20.0
SPECSpeed®2017_int_energy_peak = 330

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem ST45 V3
(4.70 GHz, AMD EPYC 4464P)

SPECspeed®2017_int_base = 19.1
SPECspeed®2017_int_energy_base = 319
SPECspeed®2017_int_peak = 20.0
SPECspeed®2017_int_energy_peak = 330

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Peak Other Flags (Continued)

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-17 03:05:58-0400.
Report generated on 2024-12-03 10:07:18 by CPU2017 PDF formatter v6716.
Originally published on 2024-12-03.