



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

CPU2017 License: 6488


Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

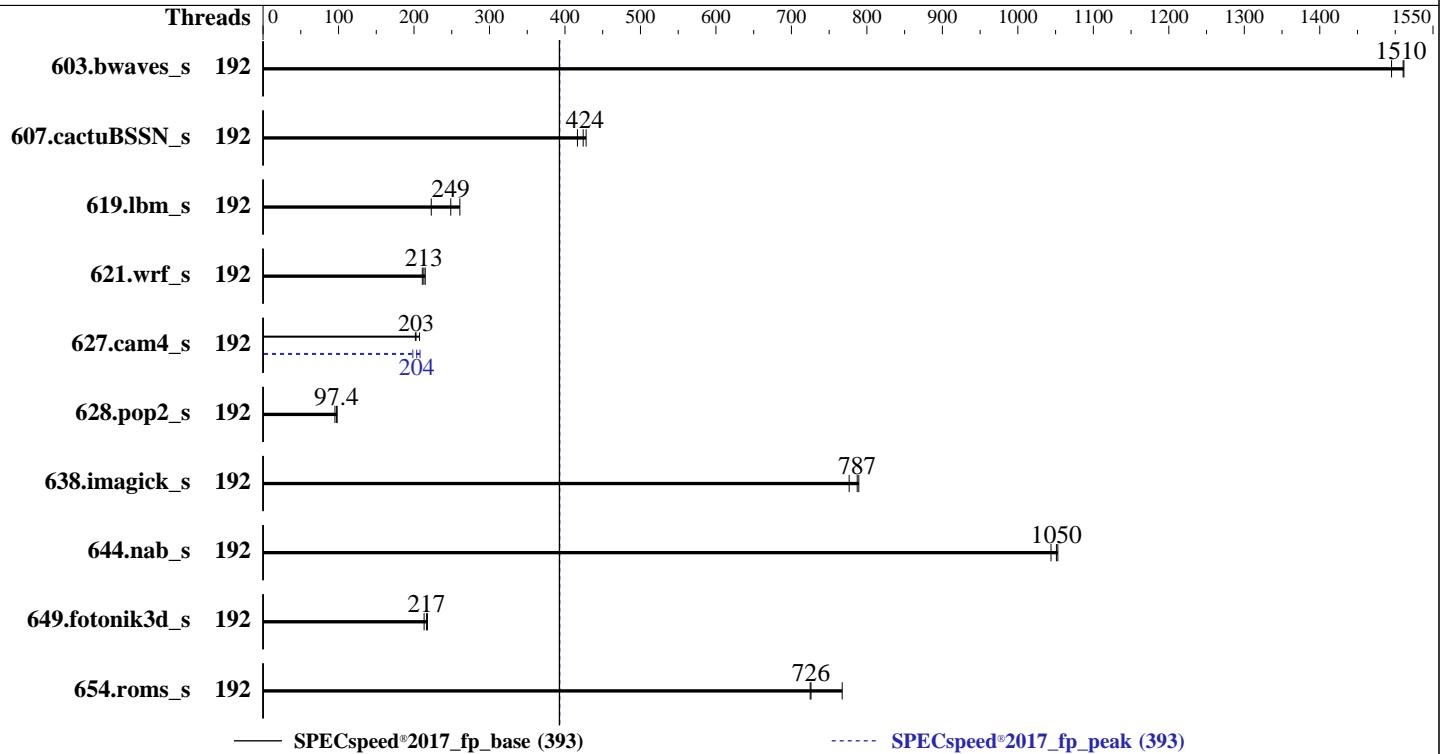

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8468H	OS:	Red Hat Enterprise Linux 9.0 (Plow)
Max MHz:	3800		5.14.0-70.13.1.el9_0.x86_64
Nominal:	2100	Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	192 cores, 4 chips		Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Orderable:	1,2,4 chips	Parallel:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 01.02.02.05 released Oct-2024
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	105 MB I+D on chip per chip	System State:	Run level 5 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)	Peak Pointers:	64-bit
Storage:	1 x 480 GB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	CPU Cooling: Air	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	39.0	1510	39.5	1500	39.1	1510	192	39.0	1510	39.5	1500	39.1	1510
607.cactuBSSN_s	192	40.0	416	39.3	424	38.9	428	192	40.0	416	39.3	424	38.9	428
619.lbm_s	192	21.1	249	20.1	261	23.5	223	192	21.1	249	20.1	261	23.5	223
621.wrf_s	192	61.6	215	62.1	213	62.7	211	192	61.6	215	62.1	213	62.7	211
627.cam4_s	192	43.7	203	43.9	202	42.7	207	192	42.6	208	43.5	204	44.7	198
628.pop2_s	192	122	97.4	121	98.2	125	95.3	192	122	97.4	121	98.2	125	95.3
638.imagick_s	192	18.3	787	18.3	789	18.6	777	192	18.3	787	18.3	789	18.6	777
644.nab_s	192	16.6	1050	16.6	1050	16.7	1040	192	16.6	1050	16.6	1050	16.7	1040
649.fotonik3d_s	192	42.7	213	42.1	217	41.9	218	192	42.7	213	42.1	217	41.9	218
654.roms_s	192	21.7	726	20.5	767	21.7	725	192	21.7	726	20.5	767	21.7	725

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance

SNC Set to Enable SNC2 (2-clusters)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

Intel Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Dec  5 14:24:15 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
14:24:15 up 2:06, 2 users, load average: 0.08, 0.02, 0.15
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 12:19 2:04m 0.03s 0.03s -bash
root pts/1 14:21 23.00s 0.80s 0.02s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4125064
max locked memory (kbytes, -l) 64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECspeed®2017_fp_base = 393

SPECspeed®2017_fp_peak = 393

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 4125064
virtual memory             (kbytes, -v) unlimited
file locks                (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
/bin/sh ./test-speed-cpu2017.sh
runcpu --define default-platform-flags -c ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define
cores=192 --tune base,peak -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg
--define cores=192 --tune base,peak --output_format all --define drop_caches --nopower --runmode speed
--tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.019/templogs/preenv.fpspeed.019.0.log --lognum 019.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000590
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings        : 48
4 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECspeed®2017_fp_base = 393

SPECspeed®2017_fp_peak = 393

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8468H
BIOS Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 4
Stepping: 8
Frequency boost: enabled
CPU max MHz: 2101.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
      smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
      bus_lock_detect coldemote movdir64b enqcmd fsmr md_clear serialize
      tsxlentrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization: VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 420 MiB (4 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
NUMA node2 CPU(s): 48-71
NUMA node3 CPU(s): 72-95
NUMA node4 CPU(s): 96-119
NUMA node5 CPU(s): 120-143
NUMA node6 CPU(s): 144-167
NUMA node7 CPU(s): 168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_fp_base = 393

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECSpeed®2017_fp_peak = 393

CPU2017 License: 6488

Test Date: Dec-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-23

node 0 size: 128251 MB

node 0 free: 127591 MB

node 1 cpus: 24-47

node 1 size: 129018 MB

node 1 free: 128313 MB

node 2 cpus: 48-71

node 2 size: 129018 MB

node 2 free: 128415 MB

node 3 cpus: 72-95

node 3 size: 129018 MB

node 3 free: 128365 MB

node 4 cpus: 96-119

node 4 size: 128982 MB

node 4 free: 128344 MB

node 5 cpus: 120-143

node 5 size: 129018 MB

node 5 free: 128481 MB

node 6 cpus: 144-167

node 6 size: 129018 MB

node 6 free: 127580 MB

node 7 cpus: 168-191

node 7 size: 128998 MB

node 7 free: 127059 MB

node distances:

	0	1	2	3	4	5	6	7
0:	10	12	21	21	21	21	21	21
1:	12	10	21	21	21	21	21	21
2:	21	21	10	12	21	21	21	21
3:	21	21	12	10	21	21	21	21
4:	21	21	21	21	10	12	21	21
5:	21	21	21	21	12	10	21	21
6:	21	21	21	21	21	21	10	12
7:	21	21	21	21	21	12	10	21

9. /proc/meminfo

MemTotal: 1056078228 kB

10. who -r

run-level 5 Dec 5 12:17

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 393

SPECspeed®2017_fp_peak = 393

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower
cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit ipruleupdate
iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables
nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 2.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release  Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
    system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   201G   24G  177G  12% /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          XFUSION
    Product:         2488H V7
    Product Family: EagleStream

-----
21. dmidecode
    Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      XFUSION
    BIOS Version:     01.02.02.05
    BIOS Date:        10/17/2024
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 393

SPECspeed®2017_fp_peak = 393

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubssn_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECspeed®2017_fp_base = 393

SPECspeed®2017_fp_peak = 393

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 393

SPECSpeed®2017_fp_peak = 393

Test Date: Dec-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactusBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-05 01:24:15-0500.

Report generated on 2025-01-28 15:47:19 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.