



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

**SPECSpeed®2017\_fp\_base = 391**

**SPECSpeed®2017\_fp\_peak = 393**

CPU2017 License: 6621


Test Sponsor: Meganet

Tested by: Fusionstor system

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

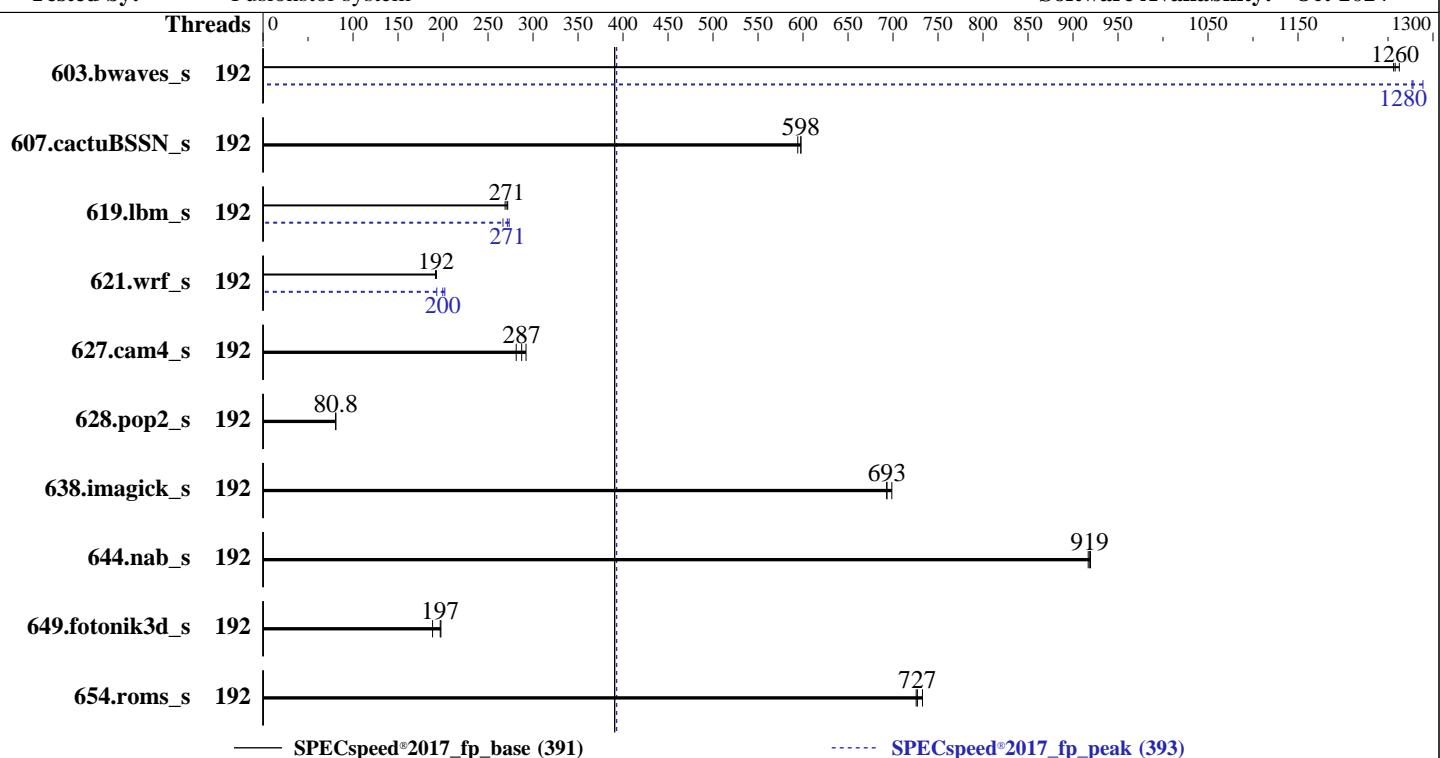

— SPECSpeed®2017\_fp\_base (391)

----- SPECSpeed®2017\_fp\_peak (393)

## Hardware

CPU Name: AMD EPYC 9654  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 960 GB SATA SSD  
 Other: CPU Cooling: Air

## Software

OS: Ubuntu 22.04.5 LTS  
 Compiler: kernel version 6.8.0-51-generic  
 Parallel: C/C++/Fortran: Version 5.0.0 of AOCC  
 Firmware: Yes  
 File System: Version 5.27 released Nov-2024  
 System State: ext4  
 Base Pointers: Run level 5 (multi-user)  
 Peak Pointers: 64-bit  
 Other: 64-bit  
 Power Management: None  
 Power Management: OS set to prefer performance at the expense of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	<u>46.9</u>	<u>1260</u>	46.7	1260	47.0	1260	192	46.2	1280	<u>46.2</u>	<u>1280</u>	45.8	1290
607.cactuBSSN_s	192	<u>27.9</u>	<u>598</u>	27.9	598	28.1	594	192	<u>27.9</u>	<u>598</u>	27.9	598	28.1	594
619.lbm_s	192	19.5	269	<u>19.3</u>	<u>271</u>	19.3	272	192	19.2	273	19.6	267	<u>19.3</u>	<u>271</u>
621.wrf_s	192	69.0	192	<u>68.8</u>	<u>192</u>	68.7	193	192	68.5	193	<u>66.2</u>	<u>200</u>	65.5	202
627.cam4_s	192	<u>30.8</u>	<u>287</u>	31.5	281	30.3	292	192	<u>30.8</u>	<u>287</u>	31.5	281	30.3	292
628.pop2_s	192	147	80.8	<u>147</u>	<u>80.8</u>	147	80.6	192	147	80.8	<u>147</u>	<u>80.8</u>	147	80.6
638.imagick_s	192	20.8	693	<u>20.8</u>	<u>693</u>	20.6	699	192	20.8	693	<u>20.8</u>	<u>693</u>	20.6	699
644.nab_s	192	19.1	917	19.0	919	<u>19.0</u>	<u>919</u>	192	19.1	917	19.0	919	<u>19.0</u>	<u>919</u>
649.fotonik3d_s	192	<u>46.3</u>	<u>197</u>	46.1	198	48.4	188	192	<u>46.3</u>	<u>197</u>	46.1	198	48.4	188
654.roms_s	192	21.7	726	<u>21.7</u>	<u>727</u>	21.5	733	192	21.7	726	<u>21.7</u>	<u>727</u>	21.5	733

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"  
LD_LIBRARY_PATH =  
    "/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znve  
    r5_A/lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

## Platform Notes

```
Sysinfo program /home/speccpu/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on AMD Wed Jan 22 15:11:40 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

21. dmidecode  
22. BIOS

1. uname -a  
Linux AMD 6.8.0-51-generic #52~22.04.1-Ubuntu SMP PREEMPT\_DYNAMIC Mon Dec 9 15:00:52 UTC 2 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
15:11:40 up 1 day, 1:57, 2 users, load average: 7.77, 8.53, 5.53  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
test :1 :1 Tue13 ?xdm? 37:02m 0.00s /usr/libexec/gdm-x-session --run-script env  
GNOME\_SHELL\_SESSION\_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu  
test pts/1 - Tue14 3:21m 2.51s 0.28s sudo -s

3. Username  
From environment variable \$USER: root  
From the command 'logname': test

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 3093863  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. sysinfo process ancestry  
/sbin/init splash  
/lib/systemd/systemd --user  
/usr/libexec/gnome-terminal-server  
bash  
sudo -s  
sudo -s  
/bin/bash  
python3 ./run\_amd\_speed\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_speed\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_speed\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 fsp speed  
runcpu --configfile amd\_speed\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed fsp speed --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/speccpu/cpu2017

6. /proc/cpuinfo  
model name : AMD EPYC 9654 96-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fusionstor

(Test Sponsor: Meganet)

## Invento i6000 EPYC (AMD EPYC 9654)

**SPECspeed®2017\_fp\_base = 391**

**SPECspeed®2017\_fp\_peak = 393**

**CPU2017 License:** 6621

**Test Sponsor:** Meganet

**Tested by:** Fusionstor system

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores      : 96
siblings        : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:          3707.8120
CPU min MHz:          1500.0000
BogoMIPS:              4799.63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                      pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                      rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                      extd_apicid aperf_fmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                      sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnnowprefetch
                      oswi ibs skinit wrt tce topoext perfctr_core perfctr_nb bpext
                      perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                      ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                      erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                      clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                      xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                      user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                      amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean
                      flushbyasid decodeassists pausefilter pfthreshold avic
                      v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                      ospe avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      avx512_vpocptdq la57 rdpid overflow_recov succor smca fsrm flush_lld
                      debug_swap
Virtualization:        AMD-V
L1d cache:              6 MiB (192 instances)
L1i cache:              6 MiB (192 instances)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

**SPECspeed®2017\_fp\_base = 391**

**SPECspeed®2017\_fp\_peak = 393**

CPU2017 License: 6621

**Test Date:** Jan-2025

**Test Sponsor:** Meganet

**Hardware Availability:** Oct-2024

**Tested by:** Fusionstor system

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

L2 cache: 192 MiB (192 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-95,192-287
NUMA node1 CPU(s): 96-191,288-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Req file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
      L1d     32K       6M     8 Data          1       64        1           64
      L1i     32K       6M     8 Instruction   1       64        1           64
      L2      1M      192M     8 Unified       2     2048        1           64
      L3     32M      768M    16 Unified      3    32768        1           64

```

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-95,192-287
node 0 size: 386596 MB
node 0 free: 382285 MB
node 1 cpus: 96-191,288-383
node 1 size: 386945 MB
node 1 free: 383763 MB
node distances:
node 0 1
  0: 10 32
  1: 32 10

```

### 9. /proc/meminfo

```
MemTotal: 792106932 kB
```

### 10. who -r

```
run-level 5 Jan 21 12:48
```

### 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```
Default Target Status
graphical      running
```

### 12. Services, from systemctl list-unit-files

```
STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 391

SPECspeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub\_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa\_supplicant

enabled-runtime	netplan-ovs-cleanupsystemd-fsck-rootsystemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievdf nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
	systemd-boot-check-no-failures systemd-network-generator systemd-networkd
	systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower
generated	wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
indirect	apport openipmi speech-dispatcher
masked	saned@ spice-vdagentd uidd
	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned screen-cleanup sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-51-generic  
root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0  
ro  
quiet  
splash  
vt.handoff=7

-----  
14. cpupower frequency-info  
analyzing CPU 94:  
current policy: frequency should be within 1.50 GHz and 2.40 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2400MHz

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_prolactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Fusionstor

(Test Sponsor: Meganet)

## Invento i6000 EPYC (AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 391

SPECspeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Platform Notes (Continued)

16. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
huge\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

18. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.5 LTS

19. Disk information  
SPEC is set to: /home/speccpu/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 ext4 879G 35G 800G 5% /

20. /sys/devices/virtual/dmi/id  
Vendor: FusionStor  
Product: Fusionstor\_Invento\_i6000\_EPYC\_Series  
Product Family: Server  
Serial: GNG6PB312A0006

21. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 4800

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUSIONSTOR  
BIOS Version: F18  
BIOS Date: 10/11/2024  
BIOS Revision: 5.27

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 391

SPECspeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

**SPECspeed®2017\_fp\_base = 391**

**SPECspeed®2017\_fp\_peak = 393**

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactusBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdallocation -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdallocation
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 391

SPECSpeed®2017\_fp\_peak = 393

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp  
-lomp -lamdlibm -lamdaloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

**SPECSpeed®2017\_fp\_base = 391**

Invento i6000 EPYC (AMD EPYC 9654)

**SPECSpeed®2017\_fp\_peak = 393**

**CPU2017 License:** 6621

**Test Date:** Jan-2025

**Test Sponsor:** Meganet

**Hardware Availability:** Oct-2024

**Tested by:** Fusionstor system

**Software Availability:** Oct-2024

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-22 04:41:39-0500.

Report generated on 2025-03-12 10:24:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.