



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

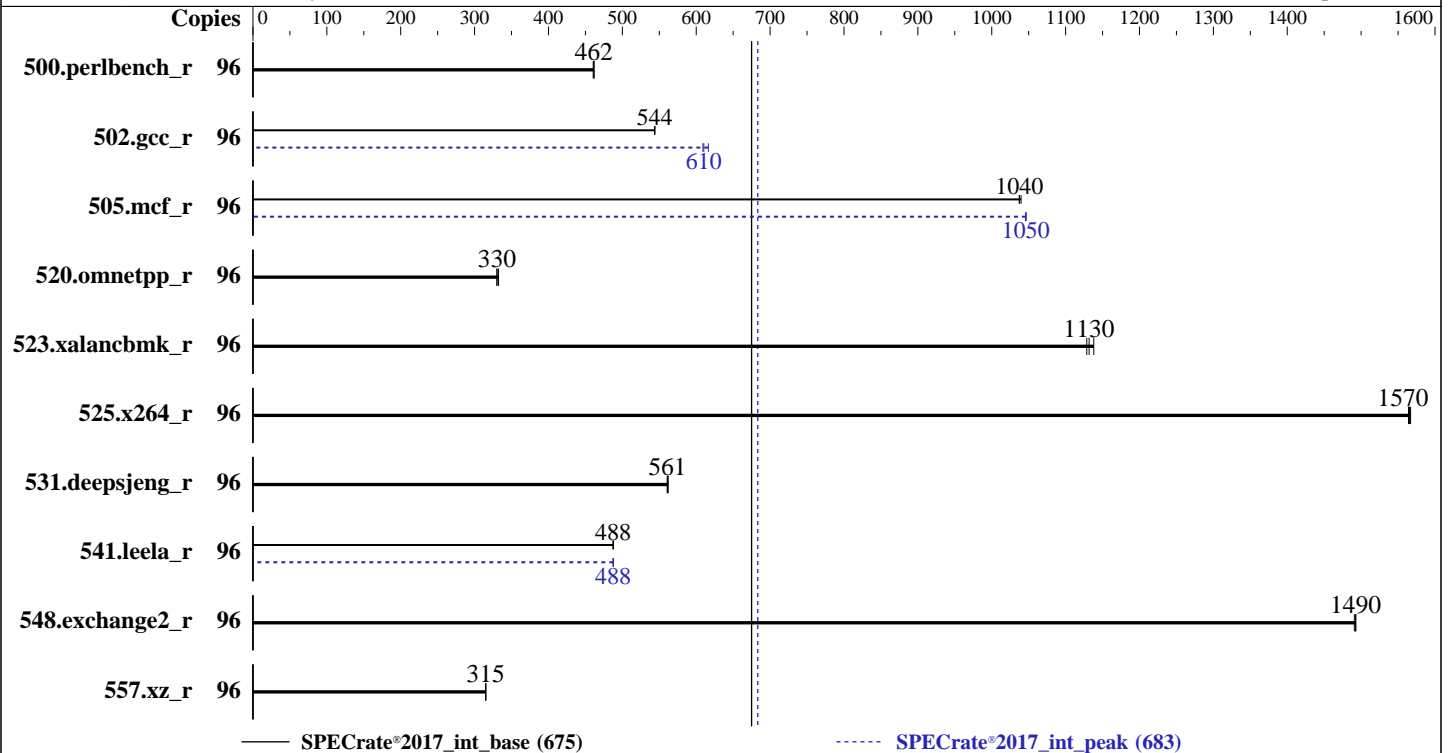

Hardware

CPU Name: AMD EPYC 9274F
 Max MHz: 4300
 Nominal: 4050
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 3 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 960 GB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 kernel version 6.4.0-150600.21-default
 C/C++/Fortran: Version 5.0.0 of AOCC
 Compiler: No
 Parallel: Version 4.3.5a released Sep-2024
 Firmware: btrfs
 File System: Run level 3 (multi-user)
 System State: 64-bit
 Base Pointers: 32/64-bit
 Peak Pointers: None
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|-------------|-------------|--------|------------|-------------|------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 96 | 332 | 461 | 331 | 462 | <u>331</u> | <u>462</u> | 96 | 332 | 461 | 331 | 462 | <u>331</u> | <u>462</u> |
| 502.gcc_r | 96 | 250 | 544 | <u>250</u> | <u>544</u> | 250 | 544 | 96 | 223 | 609 | 221 | 616 | <u>223</u> | <u>610</u> |
| 505.mcf_r | 96 | <u>150</u> | <u>1040</u> | 149 | 1040 | 150 | 1040 | 96 | <u>148</u> | <u>1050</u> | 148 | 1050 | 148 | 1050 |
| 520.omnetpp_r | 96 | <u>381</u> | <u>330</u> | 381 | 330 | 379 | 332 | 96 | <u>381</u> | <u>330</u> | 381 | 330 | 379 | 332 |
| 523.xalancbmk_r | 96 | 89.1 | 1140 | 89.8 | 1130 | <u>89.6</u> | <u>1130</u> | 96 | 89.1 | 1140 | 89.8 | 1130 | <u>89.6</u> | <u>1130</u> |
| 525.x264_r | 96 | 107 | 1560 | 107 | 1570 | <u>107</u> | <u>1570</u> | 96 | 107 | 1560 | 107 | 1570 | <u>107</u> | <u>1570</u> |
| 531.deepsjeng_r | 96 | 196 | 562 | 196 | 561 | <u>196</u> | <u>561</u> | 96 | 196 | 562 | 196 | 561 | <u>196</u> | <u>561</u> |
| 541.leela_r | 96 | 326 | 487 | 326 | 488 | <u>326</u> | <u>488</u> | 96 | <u>326</u> | <u>488</u> | 326 | 488 | 326 | 488 |
| 548.exchange2_r | 96 | 168 | 1490 | <u>169</u> | <u>1490</u> | 169 | 1490 | 96 | <u>168</u> | <u>1490</u> | <u>169</u> | <u>1490</u> | 169 | 1490 |
| 557.xz_r | 96 | 329 | 315 | <u>329</u> | <u>315</u> | 329 | 315 | 96 | 329 | 315 | <u>329</u> | <u>315</u> | 329 | 315 |

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4
Determinism Slider set to Power
DF C-States set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jan 22 01:40:39 2025
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```

-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

-----
2. w
01:40:39 up 2 min,  2 users,  load average: 0.08, 0.02, 0.00
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -             01:40   23.00s  1.14s  0.17s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh

-----
3. Username
From environment variable $USER:  root

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6191313
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6191313
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b intrate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9274F 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```

cpu cores      : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 1: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               96
On-line CPU(s) list: 0-95
Vendor ID:            AuthenticAMD
BIOS Vendor ID:      Advanced Micro Devices, Inc.
Model name:           AMD EPYC 9274F 24-Core Processor
BIOS Model name:     AMD EPYC 9274F 24-Core Processor
BIOS CPU family:     107
CPU family:          25
Model:               17
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):           2
Stepping:            1
Frequency boost:     enabled
CPU(s) scaling MHz: 94%
CPU max MHz:         4303.1250
CPU min MHz:         1500.0000
BogoMIPS:            8087.68
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                    amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                    flushbyasid decodeassists pausefilter pfthreshold avic
                    v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                    debug_swap
Virtualization:       AMD-V
L1d cache:           1.5 MiB (48 instances)
L1i cache:           1.5 MiB (48 instances)
L2 cache:            48 MiB (48 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```

L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRsB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 1.5M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 1.5M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 48M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 32M | 512M | 16 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 193191 MB
node 0 free: 192780 MB
node 1 cpus: 6-11,54-59
node 1 size: 193532 MB
node 1 free: 193155 MB
node 2 cpus: 12-17,60-65
node 2 size: 193532 MB
node 2 free: 193109 MB
node 3 cpus: 18-23,66-71
node 3 size: 193532 MB
node 3 free: 193143 MB
node 4 cpus: 24-29,72-77
node 4 size: 193532 MB
node 4 free: 193193 MB
node 5 cpus: 30-35,78-83
node 5 size: 193532 MB
node 5 free: 193179 MB
node 6 cpus: 36-41,84-89
node 6 size: 193532 MB
node 6 free: 193172 MB
node 7 cpus: 42-47,90-95
node 7 size: 193467 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

```
node 7 free: 192982 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
MemTotal:      1585003356 kB
```

```
-----
10. who -r
run-level 3 Jan 22 01:38
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewallld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
snmpd snmptrapd strongswan strongswan-starter svnservice systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
virtnetworkd virtnodevd virtnwfilterd virtsecret virtstoraged
indirect pcsd systemd-userdbd tftpd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=5d106d92-ac35-417e-b9aa-58e20fc2854f
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 34:
current policy: frequency should be within 1.50 GHz and 4.05 GHz.
The governor "performance" may decide which speed to use
within this range.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs 371G 11G 357G 3% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSX-215C-M8
Serial:      FCH282172B4
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
2x 0xCE00 M321R8GA0PB0-CWMJH 64 GB 2 rank 5600, configured at 4800
7x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X215M8.4.3.5a.0.0904241153
BIOS Date: 09/04/2024
BIOS Revision: 5.27

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
         | 541.leela_r(base, peak)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

```

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9274F
4.05 GHz Processor)

SPECrate®2017_int_base = 675

SPECrate®2017_int_peak = 683

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-22 01:40:39-0500.

Report generated on 2025-02-25 19:09:04 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.