



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017


Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

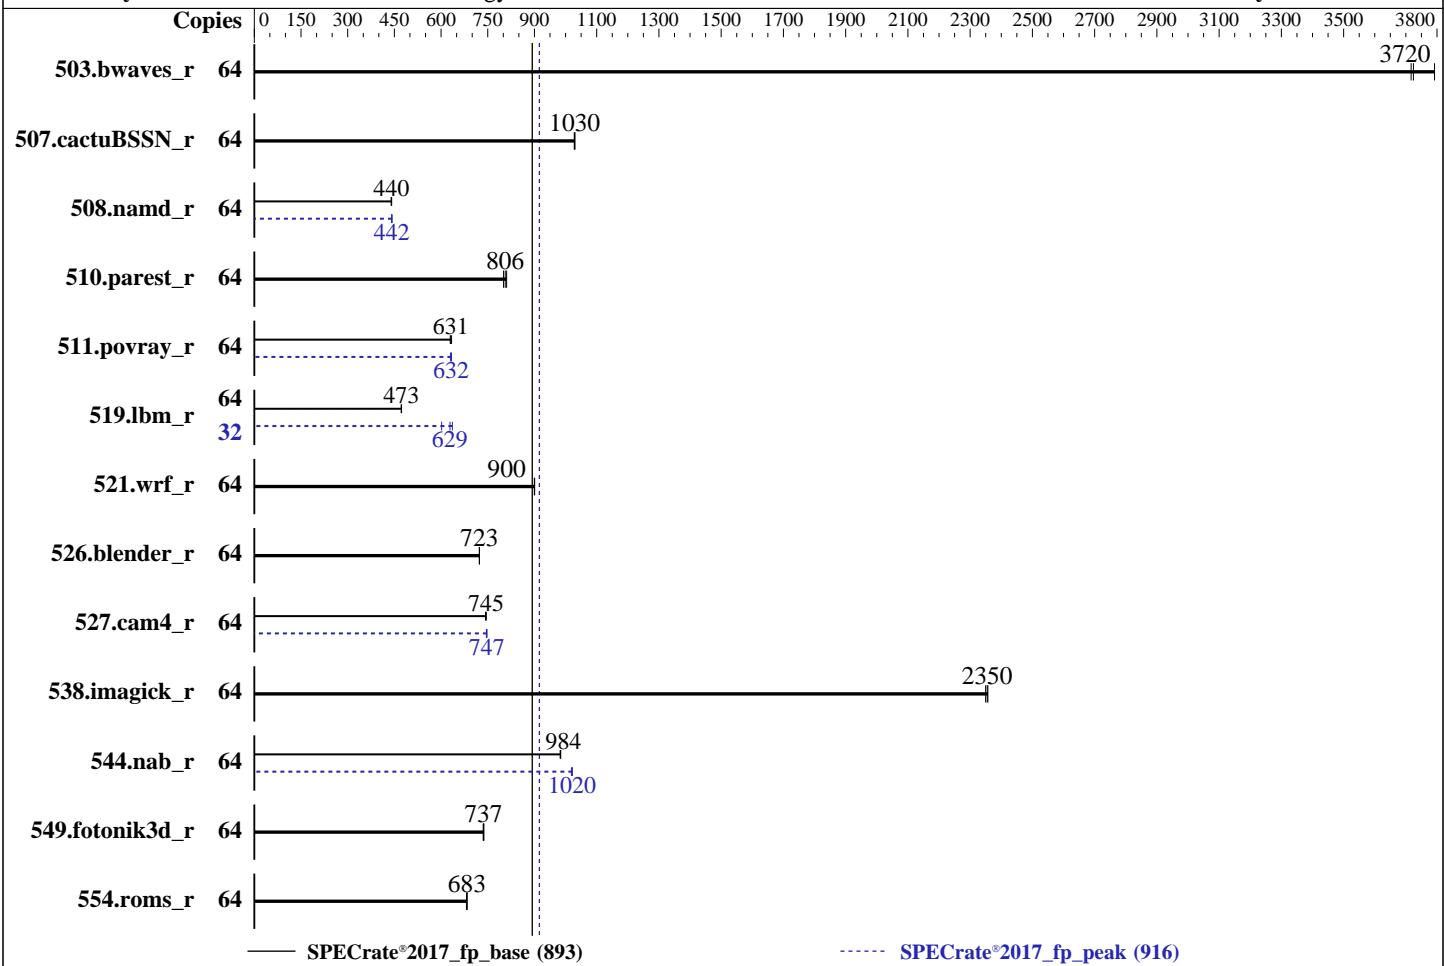

Hardware

CPU Name: AMD EPYC 9175F
Max MHz: 5000
Nominal: 4200
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip,
32 MB shared / 1 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
Storage: 1 x 1.92 TB M.2 NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Compiler: Kernel 6.4.0-150600.21-default
Parallel: C/C++/Fortran: Version 5.0.0 of AOCC
Firmware: No
File System: Lenovo BIOS Version QGE133I 7.20 released Feb-2025
System State: xfs
Base Pointers: Run level 3 (multi-user)
Peak Pointers: 64-bit
Other: 64-bit
Power Management: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	172	3720	169	3790	173	3720	64	172	3720	169	3790	173	3720
507.cactubSSN_r	64	78.7	1030	78.7	1030	78.8	1030	64	78.7	1030	78.7	1030	78.8	1030
508.namd_r	64	138	440	138	440	138	441	64	138	441	138	442	138	442
510.parest_r	64	207	811	208	806	209	801	64	207	811	208	806	209	801
511.povray_r	64	236	634	237	631	237	630	64	236	633	236	632	237	631
519.lbm_r	64	143	473	143	473	143	472	32	56.0	602	53.0	636	53.6	629
521.wrf_r	64	159	901	159	900	159	900	64	159	901	159	900	159	900
526.blender_r	64	135	723	135	723	135	723	64	135	723	135	723	135	723
527.cam4_r	64	150	745	150	745	151	743	64	150	747	150	746	150	747
538.imagick_r	64	67.5	2360	67.7	2350	67.6	2350	64	67.5	2360	67.7	2350	67.6	2350
544.nab_r	64	110	983	109	984	109	984	64	106	1020	106	1020	105	1020
549.fotonik3d_r	64	339	737	339	735	338	738	64	339	737	339	735	338	738
554.roms_r	64	149	683	149	684	149	682	64	149	683	149	684	149	682

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Operating System Notes (Continued)

```
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
    -aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Feb 20 12:02:37 2025
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
12:02:37 up 3 min, 1 user, load average: 0.09, 0.12, 0.06
USER      TTY      FROM          LOGIN@    IDLE    JCPU     PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 3094183
max locked memory         (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 3094183
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.162/templogs/preenv.fprate.162.0.log --lognum 162.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9175F 16-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 26  
model          : 2  
stepping        : 1  
microcode       : 0xb00211a  
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 192 4K pages  
cpu cores      : 16  
siblings        : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120  
physical id 1: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120  
physical id 0: apicids  
0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113,128-129,144-145,160-161,176-177,192-193,208-209,224-225,2  
40-241  
physical id 1: apicids  
256-257,272-273,288-289,304-305,320-321,336-337,352-353,368-369,384-385,400-401,416-417,432-433,448-449,4  
64-465,480-481,496-497  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.39.3:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         52 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                64  
On-line CPU(s) list:  0-63  
Vendor ID:             AuthenticAMD  
BIOS Vendor ID:       Advanced Micro Devices, Inc.  
Model name:            AMD EPYC 9175F 16-Core Processor  
BIOS Model name:      AMD EPYC 9175F 16-Core Processor  
BIOS CPU family:      AMD EPYC 9175F 16-Core Processor  
CPU family:            Unknown CPU @ 4.2GHz  
Model:                 26  
Thread(s) per core:   2  
Core(s) per socket:   16  
Socket(s):             2  
Stepping:              1  
Frequency boost:      enabled  
CPU(s) scaling MHz:  102%  
CPU max MHz:          4200.0000  
CPU min MHz:          1500.0000  
BogoMIPS:              8387.36  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat  
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb  
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid  
extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid  
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm  
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch  
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext  
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2  
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```

smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavvec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero iperf
xsaverptr rdpru wbnoinvd amd_ppin cpc_arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
AMD-V

```

Virtualization:

L1d cache: 1.5 MiB (32 instances)

L1i cache: 1 MiB (32 instances)

L2 cache: 32 MiB (32 instances)

L3 cache: 1 GiB (32 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-3,32-35

NUMA node1 CPU(s): 4-7,36-39

NUMA node2 CPU(s): 8-11,40-43

NUMA node3 CPU(s): 12-15,44-47

NUMA node4 CPU(s): 16-19,48-51

NUMA node5 CPU(s): 20-23,52-55

NUMA node6 CPU(s): 24-27,56-59

NUMA node7 CPU(s): 28-31,60-63

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability Llft: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-3,32-35

node 0 size: 96347 MB

node 0 free: 95979 MB

node 1 cpus: 4-7,36-39

node 1 size: 96727 MB

node 1 free: 96398 MB

node 2 cpus: 8-11,40-43

node 2 size: 96765 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 2 free: 96208 MB
node 3 cpus: 12-15,44-47
node 3 size: 96765 MB
node 3 free: 96481 MB
node 4 cpus: 16-19,48-51
node 4 size: 96765 MB
node 4 free: 96451 MB
node 5 cpus: 20-23,52-55
node 5 size: 96765 MB
node 5 free: 96488 MB
node 6 cpus: 24-27,56-59
node 6 size: 96765 MB
node 6 free: 96506 MB
node 7 cpus: 28-31,60-63
node 7 size: 96669 MB
node 7 free: 96372 MB
node distances:
node  0   1   2   3   4   5   6   7
  0: 10  12  12  12  32  32  32  32
  1: 12  10  12  12  32  32  32  32
  2: 12  12  10  12  32  32  32  32
  3: 12  12  12  10  32  32  32  32
  4: 32  32  32  32  10  12  12  12
  5: 32  32  32  32  12  10  12  12
  6: 32  32  32  32  12  12  10  12
  7: 32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 792138076 kB

10. who -r

run-level 3 Feb 20 11:59

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievrd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	systemd-userdbd uuidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 37:
    current policy: frequency should be within 1.50 GHz and 4.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.8T 92G 1.7T 6% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem
Serial: None

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
5x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400, configured at 6000
13x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400, configured at 6000
6x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400, configured at 6000

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: QGE133I-7.20
BIOS Date: 02/05/2025
BIOS Revision: 7.20
Firmware Revision: 9.10

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flio
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdaloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdaloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdaloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -flang -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -fsto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: -m64 -fsto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIB -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdaloc -ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_fp_base = 893

SPECrate®2017_fp_peak = 916

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-19 23:02:37-0500.

Report generated on 2025-03-12 10:28:29 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.