



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3


Test Date: Feb-2025

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Jan-2025

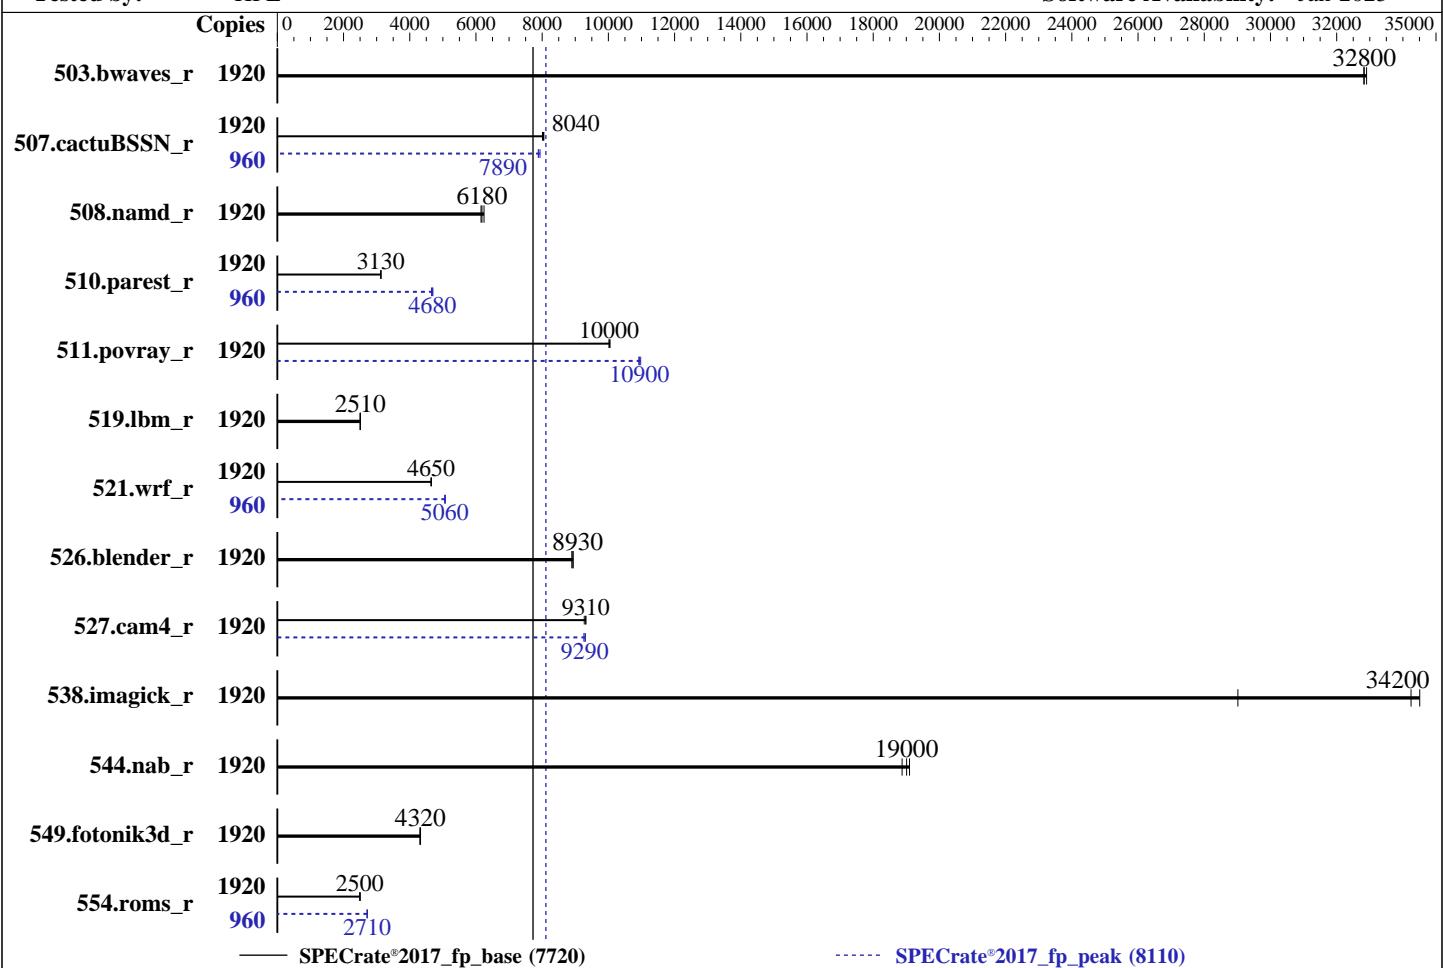

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 960 cores, 16 chips, 2 threads/core
 Orderable: 4, 8, 16 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 8 TB (128 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.5 TB NVMe SSD
 Other: CPU Cooling: Air

OS:

SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.23.33-default

Compiler:

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;

Parallel:

No

Firmware:

HPE Firmware Bundle Version 1.55.40 01/27/2025
 released
 Jan-2025

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	1920	585	32900	587	32800	586	32800	1920	585	32900	587	32800	586	32800
507.cactuBSSN_r	1920	303	8010	302	8050	302	8040	960	154	7880	153	7940	154	7890
508.namd_r	1920	292	6240	296	6150	295	6180	1920	292	6240	296	6150	295	6180
510.parest_r	1920	1605	3130	1607	3130	1605	3130	960	539	4660	536	4680	534	4700
511.povray_r	1920	447	10000	446	10100	447	10000	1920	408	11000	410	10900	411	10900
519.lbm_r	1920	807	2510	808	2510	809	2500	1920	807	2510	808	2510	809	2500
521.wrf_r	1920	925	4650	925	4650	926	4640	960	425	5060	424	5080	425	5060
526.blender_r	1920	327	8930	327	8930	329	8890	1920	327	8930	327	8930	329	8890
527.cam4_r	1920	361	9310	360	9320	362	9270	1920	363	9260	361	9300	361	9290
538.imagick_r	1920	139	34200	165	29000	138	34500	1920	139	34200	165	29000	138	34500
544.nab_r	1920	171	18900	169	19100	170	19000	1920	171	18900	169	19100	170	19000
549.fotonik3d_r	1920	1730	4330	1738	4310	1731	4320	1920	1730	4330	1738	4310	1731	4320
554.roms_r	1920	1220	2500	1225	2490	1222	2500	960	563	2710	562	2710	561	2720

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to Custom

Energy/Performance Bias set to Maximum Performance

Energy Efficient Turbo set to Disabled

Advanced Memory Protection set to Advanced ECC Support

SR-IOV set to Disabled

Intel Virtualization Technology (Intel VT, VT-x) set to Disabled

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on sph-187 Fri Feb 21 01:30:10 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

```
1. uname -a
Linux sph-187 6.4.0-150600.23.33-default #1 SMP PREEMPT_DYNAMIC Thu Jan  9 14:10:22 UTC 2025 (ba46628)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:30:10 up 6 min,  1 user,  load average: 4.40, 8.92, 4.41
USER      TTY      FROM          LOGIN@    IDLE     JCPU      PCPU WHAT
test      pts/0      -           01:28     1:14   0.05s  0.05s login -- test
test      pts/0      -           01:28    10.00s  1.77s  0.02s sudo su
```

```
3. Username
From environment variable $USER: root
From the command 'logname': test
```

```
4. ulimit -a
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 32506844
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files               (-n) 40000
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 32506844
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- test
-bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1920 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=960 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1920 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=960 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.007/templogs/preenv.fprate.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

```

cpu family      : 6
model          : 143
stepping       : 6
microcode      : 0x2b000620
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss bhi
cpu cores      : 60
siblings       : 120
16 physical ids (chips)
1920 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 8: core ids 0-59
physical id 9: core ids 0-59
physical id 10: core ids 0-59
physical id 11: core ids 0-59
physical id 12: core ids 0-59
physical id 13: core ids 0-59
physical id 14: core ids 0-59
physical id 15: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503
physical id 4: apicids 512-631
physical id 5: apicids 640-759
physical id 6: apicids 768-887
physical id 7: apicids 896-1015
physical id 8: apicids 1024-1143
physical id 9: apicids 1152-1271
physical id 10: apicids 1280-1399
physical id 11: apicids 1408-1527
physical id 12: apicids 1536-1655
physical id 13: apicids 1664-1783
physical id 14: apicids 1792-1911
physical id 15: apicids 1920-2039

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                1920
On-line CPU(s) list:   0-1919
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    60

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

Socket(s):	16
Stepping:	6
CPU(s) scaling MHz:	24%
CPU max MHz:	3500.0000
CPU min MHz:	800.0000
BogoMIPS:	3799.98
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf dni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smpem bmi2 emrs invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lll arch_capabilities
L1d cache:	45 MiB (960 instances)
L1i cache:	30 MiB (960 instances)
L2 cache:	1.9 GiB (960 instances)
L3 cache:	1.8 GiB (16 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-59,960-1019
NUMA node1 CPU(s):	60-119,1020-1079
NUMA node2 CPU(s):	120-179,1080-1139
NUMA node3 CPU(s):	180-239,1140-1199
NUMA node4 CPU(s):	240-299,1200-1259
NUMA node5 CPU(s):	300-359,1260-1319
NUMA node6 CPU(s):	360-419,1320-1379
NUMA node7 CPU(s):	420-479,1380-1439
NUMA node8 CPU(s):	480-539,1440-1499
NUMA node9 CPU(s):	540-599,1500-1559
NUMA node10 CPU(s):	600-659,1560-1619
NUMA node11 CPU(s):	660-719,1620-1679
NUMA node12 CPU(s):	720-779,1680-1739
NUMA node13 CPU(s):	780-839,1740-1799
NUMA node14 CPU(s):	840-899,1800-1859
NUMA node15 CPU(s):	900-959,1860-1919
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation: Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     45M   12 Data          1       64      1           64
  L1i     32K     30M    8 Instruction   1       64      1           64
  L2      2M      1.9G   16 Unified      2      2048      1           64
  L3    112.5M    1.8G   15 Unified      3    122880      1           64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0-59,960-1019
node 0 size: 506924 MB
node 0 free: 505446 MB
node 1 cpus: 60-119,1020-1079
node 1 size: 508062 MB
node 1 free: 506950 MB
node 2 cpus: 120-179,1080-1139
node 2 size: 508062 MB
node 2 free: 507271 MB
node 3 cpus: 180-239,1140-1199
node 3 size: 508062 MB
node 3 free: 507257 MB
node 4 cpus: 240-299,1200-1259
node 4 size: 508062 MB
node 4 free: 507482 MB
node 5 cpus: 300-359,1260-1319
node 5 size: 508062 MB
node 5 free: 507480 MB
node 6 cpus: 360-419,1320-1379
node 6 size: 508062 MB
node 6 free: 507475 MB
node 7 cpus: 420-479,1380-1439
node 7 size: 508062 MB
node 7 free: 507376 MB
node 8 cpus: 480-539,1440-1499
node 8 size: 508062 MB
node 8 free: 507491 MB
node 9 cpus: 540-599,1500-1559
node 9 size: 508062 MB
node 9 free: 507374 MB
node 10 cpus: 600-659,1560-1619
node 10 size: 508062 MB
node 10 free: 507495 MB
node 11 cpus: 660-719,1620-1679
node 11 size: 508062 MB
node 11 free: 507488 MB
node 12 cpus: 720-779,1680-1739
node 12 size: 508062 MB
node 12 free: 507517 MB
node 13 cpus: 780-839,1740-1799
node 13 size: 508062 MB
node 13 free: 507502 MB
node 14 cpus: 840-899,1800-1859
node 14 size: 508062 MB
node 14 free: 507506 MB
node 15 cpus: 900-959,1860-1919
node 15 size: 506945 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

```

node 15 free: 505099 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  16  16  18  40  40  40  40  40  40  40  40  40  40  40  40
  1: 16  10  18  16  40  40  40  40  40  40  40  40  40  40  40  40
  2: 16  18  10  16  40  40  40  40  40  40  40  40  40  40  40  40
  3: 18  16  16  10  40  40  40  40  40  40  40  40  40  40  40  40
  4: 40  40  40  40  10  16  16  18  40  40  40  40  40  40  40  40
  5: 40  40  40  40  16  10  18  16  40  40  40  40  40  40  40  40
  6: 40  40  40  40  16  18  10  16  40  40  40  40  40  40  40  40
  7: 40  40  40  40  18  16  16  10  40  40  40  40  40  40  40  40
  8: 40  40  40  40  40  40  40  40  10  16  16  18  40  40  40  40
  9: 40  40  40  40  40  40  40  40  40  16  10  18  16  40  40  40
 10: 40  40  40  40  40  40  40  40  40  16  18  10  16  40  40  40
 11: 40  40  40  40  40  40  40  40  40  18  16  16  10  40  40  40
 12: 40  40  40  40  40  40  40  40  40  40  40  40  40  10  16  18
 13: 40  40  40  40  40  40  40  40  40  40  40  40  40  16  10  18
 14: 40  40  40  40  40  40  40  40  40  40  40  40  40  16  18  10
 15: 40  40  40  40  40  40  40  40  40  40  40  40  40  18  16  16  10

-----
9. /proc/meminfo
MemTotal:      8321788692 kB

-----
10. who -r
run-level 3 Feb 21 01:27

-----
11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)
Default Target Status
multi-user     degraded

-----
12. Failed units, from systemctl list-units --state=failed
UNIT          LOAD ACTIVE SUB DESCRIPTION
* dcdchkgracefulshutdown.service loaded failed failed Check if previous system shutdown was graceful
* postfix.service           loaded failed failed Postfix Mail Transport Agent

-----
13. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chrony
                cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
                display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump
                kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                smartd sshd systemd-pstore vgaauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4
                wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled       accounts-daemon amavis apache2@ autofs autoyast-initscripts blk-availability
                bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd
                clamonacc console-getty cups cups-browsed cxl-monitor debug-shell ebttables
                exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievfd irqbalance
                issue-add-ssh-keys kexec-load lummask man-db-create mariadb mariadb@ multipathd named
                ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind
                rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spampd
                speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures
                systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ winbind ypbnd
indirect       serial-getty@ systemd-userdbd tftp wickedd

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.33-default
root=UUID=8ce0406a-9f17-47c0-afbc-27e5de1eeccb
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nwatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
crashkernel=1G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

15. cpupower frequency-info
analyzing CPU 1873:
 current policy: frequency should be within 800 MHz and 3.50 GHz.
 The governor "performance" may decide which speed to use
 within this range.
 boost state support:
 Supported: yes
 Active: yes

16. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

17. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
hpe-foundation-release HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

21. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 1.5T 33G 1.5T 3% /

22. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: Compute Scale-up Server 3200
Product Family: 1590PID03030201
Serial: 5UF2491355-000

23. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
128x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: Bundle:1.55.40-20250129_060251 SFW:009.036.009.000.2501270505
BIOS Date: 01/27/2025

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 7720

SPECrate®2017_fp_peak = 8110

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-21 02:30:09-0500.

Report generated on 2025-03-26 10:33:54 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.