



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3


**Test Date:** Feb-2025

**Test Sponsor:** HPE

**Hardware Availability:** Sep-2023

**Tested by:** HPE

**Software Availability:** Jan-2025

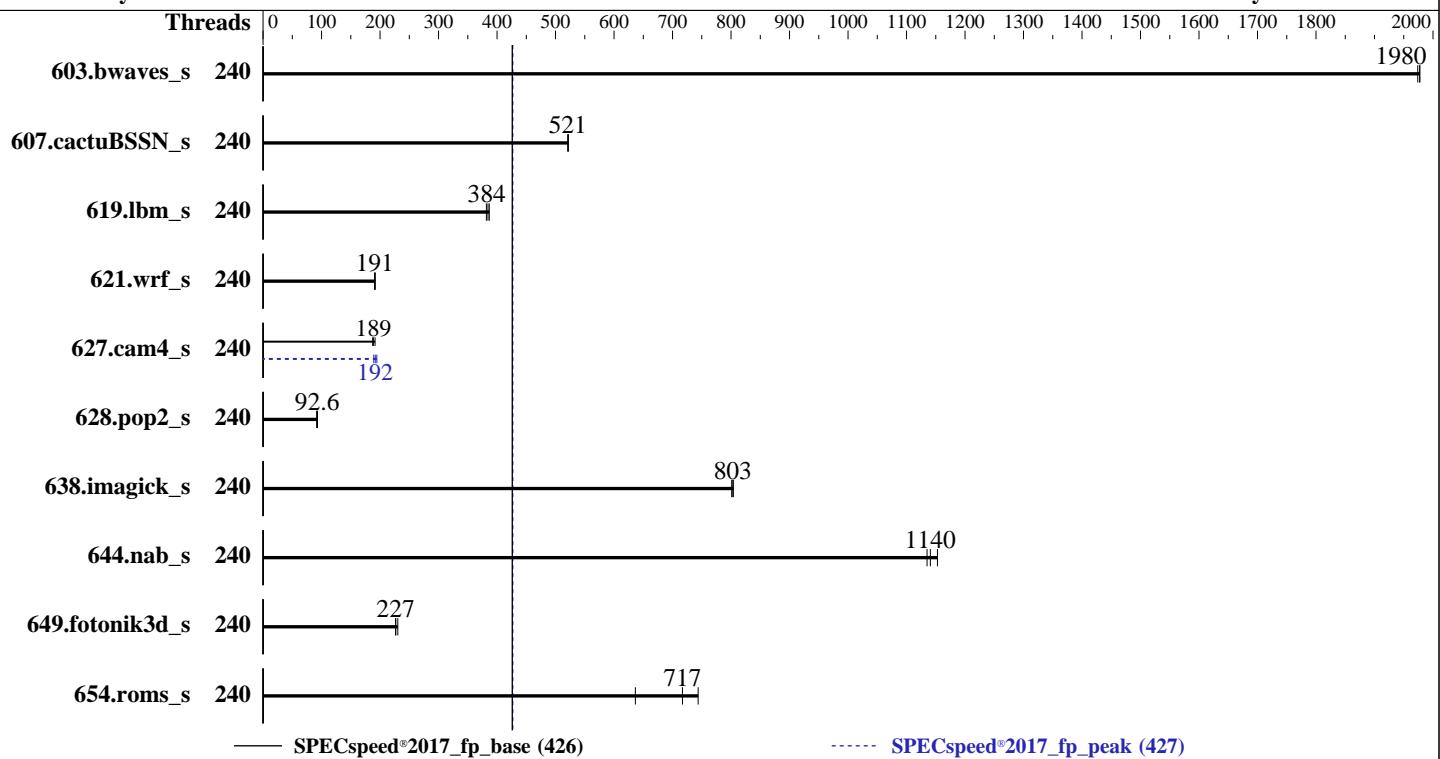

## Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 960 cores, 16 chips  
Orderable: 4, 8, 16 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 8 TB (128 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1.5 TB NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
Compiler: Kernel 6.4.0-150600.23.33-default  
C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: HPE Firmware Bundle Version 1.55.40 01/27/2025 released  
Jan-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Date: Feb-2025

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Jan-2025

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	<b>29.8</b>	<b>1980</b>	29.9	1970	29.8	1980	240	<b>29.8</b>	<b>1980</b>	29.9	1970	29.8	1980
607.cactuBSSN_s	240	<b>32.0</b>	<b>521</b>	32.0	521	31.9	522	240	<b>32.0</b>	<b>521</b>	32.0	521	31.9	522
619.lbm_s	240	13.7	382	13.5	387	<b>13.6</b>	<b>384</b>	240	13.7	382	13.5	387	<b>13.6</b>	<b>384</b>
621.wrf_s	240	69.0	192	<b>69.2</b>	<b>191</b>	69.4	191	240	69.0	192	<b>69.2</b>	<b>191</b>	69.4	191
627.cam4_s	240	46.3	191	47.3	187	<b>47.0</b>	<b>189</b>	240	45.6	195	46.8	189	<b>46.2</b>	<b>192</b>
628.pop2_s	240	<b>128</b>	<b>92.6</b>	130	91.7	128	93.0	240	<b>128</b>	<b>92.6</b>	130	91.7	128	93.0
638.imagick_s	240	17.9	804	18.0	801	<b>18.0</b>	<b>803</b>	240	17.9	804	18.0	801	<b>18.0</b>	<b>803</b>
644.nab_s	240	<b>15.3</b>	<b>1140</b>	15.2	1150	15.4	1140	240	<b>15.3</b>	<b>1140</b>	15.2	1150	15.4	1140
649.fotonik3d_s	240	40.2	227	39.6	230	<b>40.2</b>	<b>227</b>	240	40.2	227	39.6	230	<b>40.2</b>	<b>227</b>
654.roms_s	240	21.2	744	24.7	636	<b>22.0</b>	<b>717</b>	240	21.2	744	24.7	636	<b>22.0</b>	<b>717</b>

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 426

SPECspeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

Workload Profile set to Custom  
Power Regulator set to Static High Performance Mode  
Energy Efficient Turbo set to Disabled  
Energy/Performance Bias set to Maximum Performance  
Intel Hyper-Threading set to Disabled  
Adjacent Sector Prefetch set to Disabled  
LLC Prefetch set to Enabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Enhanced Processor Performance Profile set to Aggressive  
Memory Patrol Scrubbing set to Disabled  
Advanced Memory Protection set to Advanced ECC Support  
SR-IOV set to Disabled  
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sph-187 Fri Feb 28 08:30:01 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux sph-187 6.4.0-150600.23.33-default #1 SMP PREEMPT\_DYNAMIC Thu Jan 9 14:10:22 UTC 2025 (ba46628)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 426

SPECspeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## Platform Notes (Continued)

2. w  
08:30:01 up 1:37, 1 user, load average: 162.28, 196.78, 206.13  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
test ttys0 - 06:56 1:33m 0.05s 0.03s login -- test  
test pts/0 - 06:56 1:31m 1.03s 0.04s sudo su

3. Username  
From environment variable \$USER: root  
From the command 'logname': test

4. ulimit -a  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 32508887  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 40000  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 32508887  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
login -- test  
-bash  
sudo su  
sudo su  
su  
bash  
bash  
bash  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=240 --tune base,peak -o all --define  
drop\_caches fpspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=240 --tune base,peak --output\_format all  
--define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv  
--note-preenv --logfile \$SPEC/tmp/CPU2017.029/templogs/preenv.fpspeed.029.0.log --lognum 029.0  
--from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8490H  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 6

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```

microcode      : 0x2b000620
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrsb bhi
cpu cores     : 60
siblings       : 60
16 physical ids (chips)
960 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 8: core ids 0-59
physical id 9: core ids 0-59
physical id 10: core ids 0-59
physical id 11: core ids 0-59
physical id 12: core ids 0-59
physical id 13: core ids 0-59
physical id 14: core ids 0-59
physical id 15: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502
physical id 4: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630
physical id 5: apicids
640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
4,746,748,750,752,754,756,758
physical id 6: apicids
768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
2,874,876,878,880,882,884,886
physical id 7: apicids
896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
00,1002,1004,1006,1008,1010,1012,1014
physical id 8: apicids
1024,1026,1028,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1088,1090,1092,1094,1096,1098,1100,1102,1104,1106,
1108,1110,1112,1114,1116,1118,1120,1122,1124,1126,1128,1130,1132,1134,1136,1138,1140,1142
physical id 9: apicids
1152,1154,1156,1158,1160,1162,1164,1166,1168,1170,1172,1174,1176,1178,1180,1182,1184,1186,1188,1190,1192,
1194,1196,1198,1200,1202,1204,1206,1208,1210,1212,1214,1216,1218,1220,1222,1224,1226,1228,1230,1232,1234,
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```

1236,1238,1240,1242,1244,1246,1248,1250,1252,1254,1256,1258,1260,1262,1264,1266,1268,1270
physical id 10: apicids
1280,1282,1284,1286,1288,1290,1292,1294,1296,1298,1300,1302,1304,1306,1308,1310,1312,1314,1316,1318,1320,
1322,1324,1326,1328,1330,1332,1334,1336,1338,1340,1342,1344,1346,1348,1350,1352,1354,1356,1358,1360,1362,
1364,1366,1368,1370,1372,1374,1376,1378,1380,1382,1384,1386,1388,1390,1392,1394,1396,1398
physical id 11: apicids
1408,1410,1412,1414,1416,1418,1420,1422,1424,1426,1428,1430,1432,1434,1436,1438,1440,1442,1444,1446,1448,
1450,1452,1454,1456,1458,1460,1462,1464,1466,1468,1470,1472,1474,1476,1478,1480,1482,1484,1486,1488,1490,
1492,1494,1496,1498,1500,1502,1504,1506,1508,1510,1512,1514,1516,1518,1520,1522,1524,1526
physical id 12: apicids
1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,1562,1564,1566,1568,1570,1572,1574,1576,
1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1600,1602,1604,1606,1608,1610,1612,1614,1616,1618,
1620,1622,1624,1626,1628,1630,1632,1634,1636,1638,1640,1642,1644,1646,1648,1650,1652,1654
physical id 13: apicids
1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,1684,1686,1688,1690,1692,1694,1696,1698,1700,1702,1704,
1706,1708,1710,1712,1714,1716,1718,1720,1722,1724,1726,1728,1730,1732,1734,1736,1738,1740,1742,1744,1746,
1748,1750,1752,1754,1756,1758,1760,1762,1764,1766,1768,1770,1772,1774,1776,1778,1780,1782
physical id 14: apicids
1792,1794,1796,1798,1800,1802,1804,1806,1808,1810,1812,1814,1816,1818,1820,1822,1824,1826,1828,1830,1832,
1834,1836,1838,1840,1842,1844,1846,1848,1850,1852,1854,1856,1858,1860,1862,1864,1866,1868,1870,1872,1874,
1876,1878,1880,1882,1884,1886,1888,1890,1892,1894,1896,1898,1900,1902,1904,1906,1908,1910
physical id 15: apicids
1920,1922,1924,1926,1928,1930,1932,1934,1936,1938,1940,1942,1944,1946,1948,1950,1952,1954,1956,1958,1960,
1962,1964,1966,1968,1970,1972,1974,1976,1978,1980,1982,1984,1986,1988,1990,1992,1994,1996,1998,2000,2002,
2004,2006,2008,2010,2012,2014,2016,2018,2020,2022,2024,2026,2028,2030,2032,2034,2036,2038

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	960
On-line CPU(s) list:	0-959
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	60
Socket(s):	16
Stepping:	6
CPU(s) scaling MHz:	24%
CPU max MHz:	3500.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.01
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmm_llc
cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities
```

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

NUMA node8 CPU(s):

NUMA node9 CPU(s):

NUMA node10 CPU(s):

NUMA node11 CPU(s):

NUMA node12 CPU(s):

NUMA node13 CPU(s):

NUMA node14 CPU(s):

NUMA node15 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	45M	12	Data	1	64	1	64
L1i	32K	30M	8	Instruction	1	64	1	64
L2	2M	1.9G	16	Unified	2	2048	1	64
L3	112.5M	1.8G	15	Unified	3	122880	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-59

node 0 size: 507196 MB

node 0 free: 499447 MB

node 1 cpus: 60-119

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECSpeed®2017\_fp\_base = 426

SPECSpeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## Platform Notes (Continued)

```
node 1 size: 508078 MB
node 1 free: 504050 MB
node 2 cpus: 120-179
node 2 size: 508078 MB
node 2 free: 500467 MB
node 3 cpus: 180-239
node 3 size: 508078 MB
node 3 free: 506924 MB
node 4 cpus: 240-299
node 4 size: 508078 MB
node 4 free: 507590 MB
node 5 cpus: 300-359
node 5 size: 508078 MB
node 5 free: 507743 MB
node 6 cpus: 360-419
node 6 size: 508078 MB
node 6 free: 507779 MB
node 7 cpus: 420-479
node 7 size: 508078 MB
node 7 free: 507779 MB
node 8 cpus: 480-539
node 8 size: 508078 MB
node 8 free: 507724 MB
node 9 cpus: 540-599
node 9 size: 508078 MB
node 9 free: 507720 MB
node 10 cpus: 600-659
node 10 size: 508039 MB
node 10 free: 507615 MB
node 11 cpus: 660-719
node 11 size: 508078 MB
node 11 free: 507723 MB
node 12 cpus: 720-779
node 12 size: 508078 MB
node 12 free: 507438 MB
node 13 cpus: 780-839
node 13 size: 508078 MB
node 13 free: 507308 MB
node 14 cpus: 840-899
node 14 size: 508078 MB
node 14 free: 507499 MB
node 15 cpus: 900-959
node 15 size: 507006 MB
node 15 free: 506197 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 0: 10 16 16 18 40 40 40 40 40 40 40 40 40 40 40 40
  1: 16 10 18 16 40 40 40 40 40 40 40 40 40 40 40 40
  2: 16 18 10 16 40 40 40 40 40 40 40 40 40 40 40 40
  3: 18 16 16 10 40 40 40 40 40 40 40 40 40 40 40 40
  4: 40 40 40 40 10 16 16 18 40 40 40 40 40 40 40 40
  5: 40 40 40 40 16 10 18 16 40 40 40 40 40 40 40 40
  6: 40 40 40 40 16 18 10 16 40 40 40 40 40 40 40 40
  7: 40 40 40 40 18 16 16 10 40 40 40 40 40 40 40 40
  8: 40 40 40 40 40 40 40 40 40 10 16 16 18 40 40 40
  9: 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40
 10: 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40
 11: 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40
 12: 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18
 13: 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```
14: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16
15: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 8322311812 kB
```

```
-----  
10. who -r  
run-level 3 Feb 28 06:55
```

```
-----  
11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)  
Default Target Status  
multi-user degraded
```

```
-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
* dcdchkgracefulshutdown.service loaded failed failed Check if previous system shutdown was graceful  
* postfix.service loaded failed failed Postfix Mail Transport Agent
```

```
-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd  
cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown  
display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump  
kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog  
smartd sshd systemd-pstore vgaauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-fsck-root systemd-remount-fs  
disabled accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability  
bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd  
clamonacc console-getty cups cups-browsed cxl-monitor debug-shell ebttables  
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance  
issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named  
ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind  
rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spampd  
speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ winbind yppbind  
indirect pcscd serial-getty@ systemd-userdbd tftp wickedd
```

```
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.33-default  
root=UUID=8ce0406a-9f17-47c0-afbc-27e5de1eeccb  
rd.auto=1  
console=ttyS0,115200n8  
selinux=0  
security=  
splash=silent  
mitigations=auto  
console=ttyS0,115200  
udev.children-max=512  
nmi_watchdog=0  
uv_nmi.action=kdump  
add_efi_memmap  
tsc=nwatchdog
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 426

SPECspeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## Platform Notes (Continued)

```
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
crashkernel=1G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

-----
15. cpupower frequency-info
analyzing CPU 104:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag              1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release          SUSE Linux Enterprise Server 15 SP6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

hpe-foundation-release HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

-----  
20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	1.5T	62G	1.4T	5%	/

-----  
21. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	Compute Scale-up Server 3200
Product Family:	1590PID03030201
Serial:	5UF2491355-000

-----  
22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

128x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	HPE
BIOS Version:	Bundle:1.55.40-20250129_060251 SFW:009.036.009.000.2501270505
BIOS Date:	01/27/2025

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactubssn\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 426

SPECspeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## Compiler Version Notes (Continued)

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 426

SPECspeed®2017\_fp\_peak = 427

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Sep-2023

Software Availability: Jan-2025

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC\_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECspeed®2017\_fp\_base = 426**

**SPECspeed®2017\_fp\_peak = 427**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-28 09:30:01-0500.

Report generated on 2025-03-26 10:33:29 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.