



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

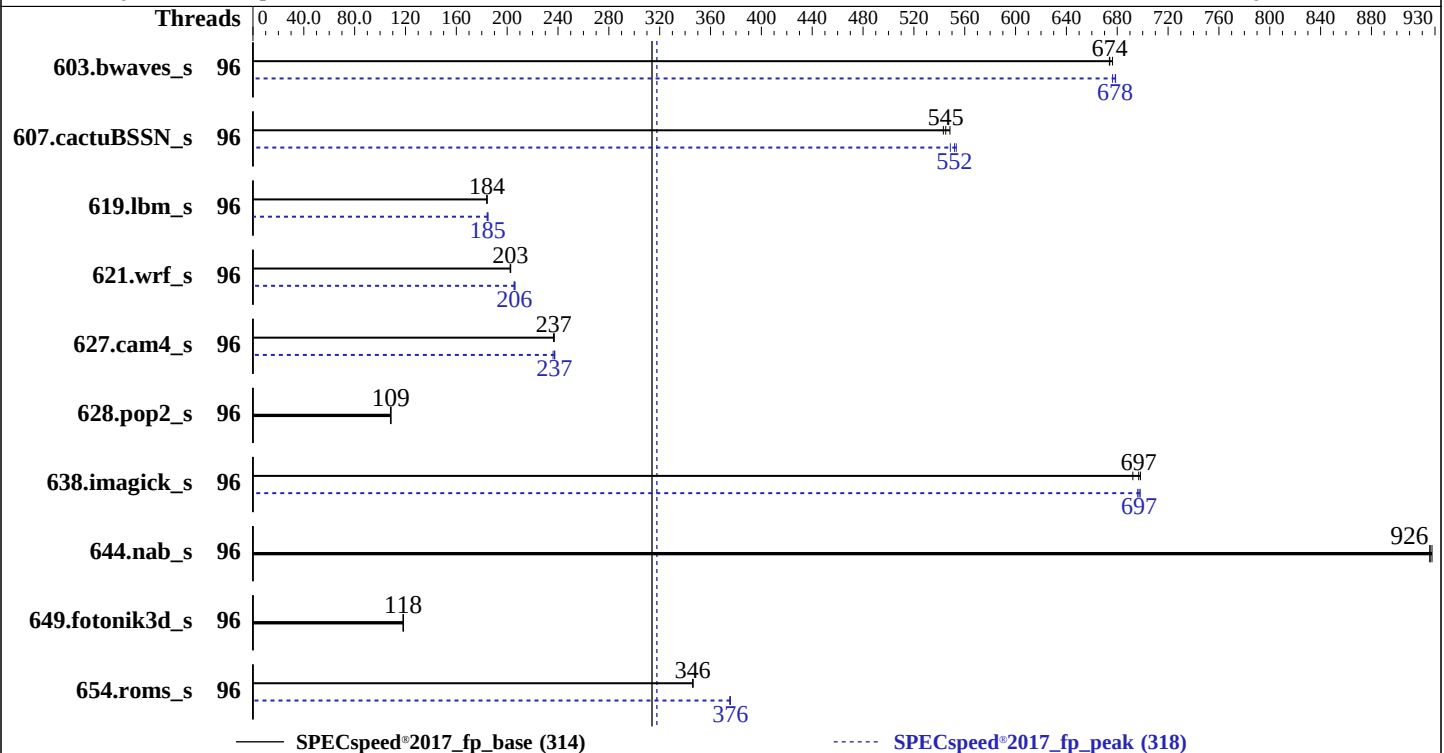

Hardware

CPU Name: AMD EPYC 9655
Max MHz: 4500
Nominal: 2600
Enabled: 96 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.2 LTS
Kernel 6.8.0-54-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 3.3 released Feb-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	<u>87.5</u>	<u>674</u>	87.6	674	87.2	676	96	<u>87.0</u>	<u>678</u>	87.2	676	86.9	679
607.cactuBSSN_s	96	30.4	548	30.7	543	<u>30.6</u>	<u>545</u>	96	30.4	549	<u>30.2</u>	<u>552</u>	30.1	553
619.lbm_s	96	<u>28.4</u>	<u>184</u>	28.5	184	28.4	184	96	<u>28.4</u>	<u>185</u>	28.3	185	28.4	184
621.wrf_s	96	65.2	203	<u>65.3</u>	<u>203</u>	65.4	202	96	<u>64.3</u>	<u>206</u>	64.1	206	64.4	205
627.cam4_s	96	37.5	236	<u>37.4</u>	<u>237</u>	37.4	237	96	37.3	238	<u>37.4</u>	<u>237</u>	37.5	236
628.pop2_s	96	109	109	110	108	<u>109</u>	<u>109</u>	96	109	109	110	108	<u>109</u>	<u>109</u>
638.imagick_s	96	20.7	698	<u>20.7</u>	<u>697</u>	20.8	692	96	20.7	698	<u>20.7</u>	<u>697</u>	20.7	696
644.nab_s	96	18.8	928	18.9	926	<u>18.9</u>	<u>926</u>	96	18.8	928	18.9	926	<u>18.9</u>	<u>926</u>
649.fotonik3d_s	96	77.2	118	<u>77.1</u>	<u>118</u>	77.0	118	96	77.2	118	<u>77.1</u>	<u>118</u>	77.0	118
654.roms_s	96	45.5	346	<u>45.5</u>	<u>346</u>	45.5	346	96	42.0	375	<u>41.9</u>	<u>376</u>	41.9	376

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-95"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

SMT Control = Disabled

Determinism Control = Manual

Determinism Enable = Power

TDP Control = Manual

TDP = 400

Package Power Limit Control = Manual

Package Power Limit = 400

TSME = Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-1115hs-tnr-9655 Mon Mar 3 08:24:28 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux as-1115hs-tnr-9655 6.8.0-54-generic #56-Ubuntu SMP PREEMPT_DYNAMIC Sat Feb 8 00:37:57 UTC 2025
x86_64 x86_64 x86_64 GNU/Linux

2. w
08:24:28 up 4:24, 1 user, load average: 6.86, 5.91, 3.58
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
smc tty1 - 05:51 2:32m 0.50s 0.48s sudo su -

3. Username
From environment variable \$USER: root
From the command 'logname': smc

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 2061086
nofiles 1024

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Platform Notes (Continued)

vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9655 96-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 96
siblings        : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64	
CPU op-mode(s):	32-bit, 64-bit	
Address sizes:	52 bits physical, 57 bits virtual	
Byte Order:	Little Endian	
CPU(s):	96	
On-line CPU(s) list:	0-95	
Vendor ID:	AuthenticAMD	
BIOS Vendor ID:	Advanced Micro Devices, Inc.	
Model name:	AMD EPYC 9655 96-Core Processor	
BIOS Model name:	AMD EPYC 9655 96-Core Processor	Unknown CPU @ 2.6GHz
BIOS CPU family:	107	
CPU family:	26	
Model:	2	
Thread(s) per core:	1	
Core(s) per socket:	96	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Platform Notes (Continued)

Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 59%
CPU max MHz: 4509.3750
CPU min MHz: 1500.0000
BogoMIPS: 5199.73
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fstrm avx512_vp2intersect flush_l1d debug_swap
AMD-V
4.5 MiB (96 instances)
3 MiB (96 instances)
96 MiB (96 instances)
384 MiB (12 instances)
1
0-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Feb-2025

Platform Notes (Continued)

```
available: 1 nodes (0)
node 0 cpus: 0-95
node 0 size: 515346 MB
node 0 free: 513752 MB
node distances:
node 0
0: 10
```

```
-----
9. /proc/meminfo
MemTotal: 527714316 kB
```

```
-----
10. who -r
run-level 3 Mar 3 03:59
```

```
-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
snapd sysstat systemd-networkd systemd-pcrlock-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-54-generic
root=UUID=2f33650d-d2f3-41f6-9a66-d290598ecbad
ro
```

```
-----
14. cpupower frequency-info
analyzing CPU 3:
current policy: frequency should be within 1.50 GHz and 2.60 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2600MHZ
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Platform Notes (Continued)

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme2n1p2 ext4 879G 16G 818G 2% /

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS -2015HS-TNR
Product Family: SMC H13
Serial: S515066X4516356

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Micron Technology MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
2x Micron Technology MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 3.3
BIOS Date: 02/04/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Feb-2025

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Peak Optimization Flags (Continued)

638.imagick_s: Same as 619.lbm_s

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1115HS-TNR
(H13SSH, AMD EPYC 9655)

SPECspeed®2017_fp_base = 314

SPECspeed®2017_fp_peak = 318

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Feb-2025

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-03 03:24:28-0500.

Report generated on 2025-03-26 10:34:15 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.