



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082


Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

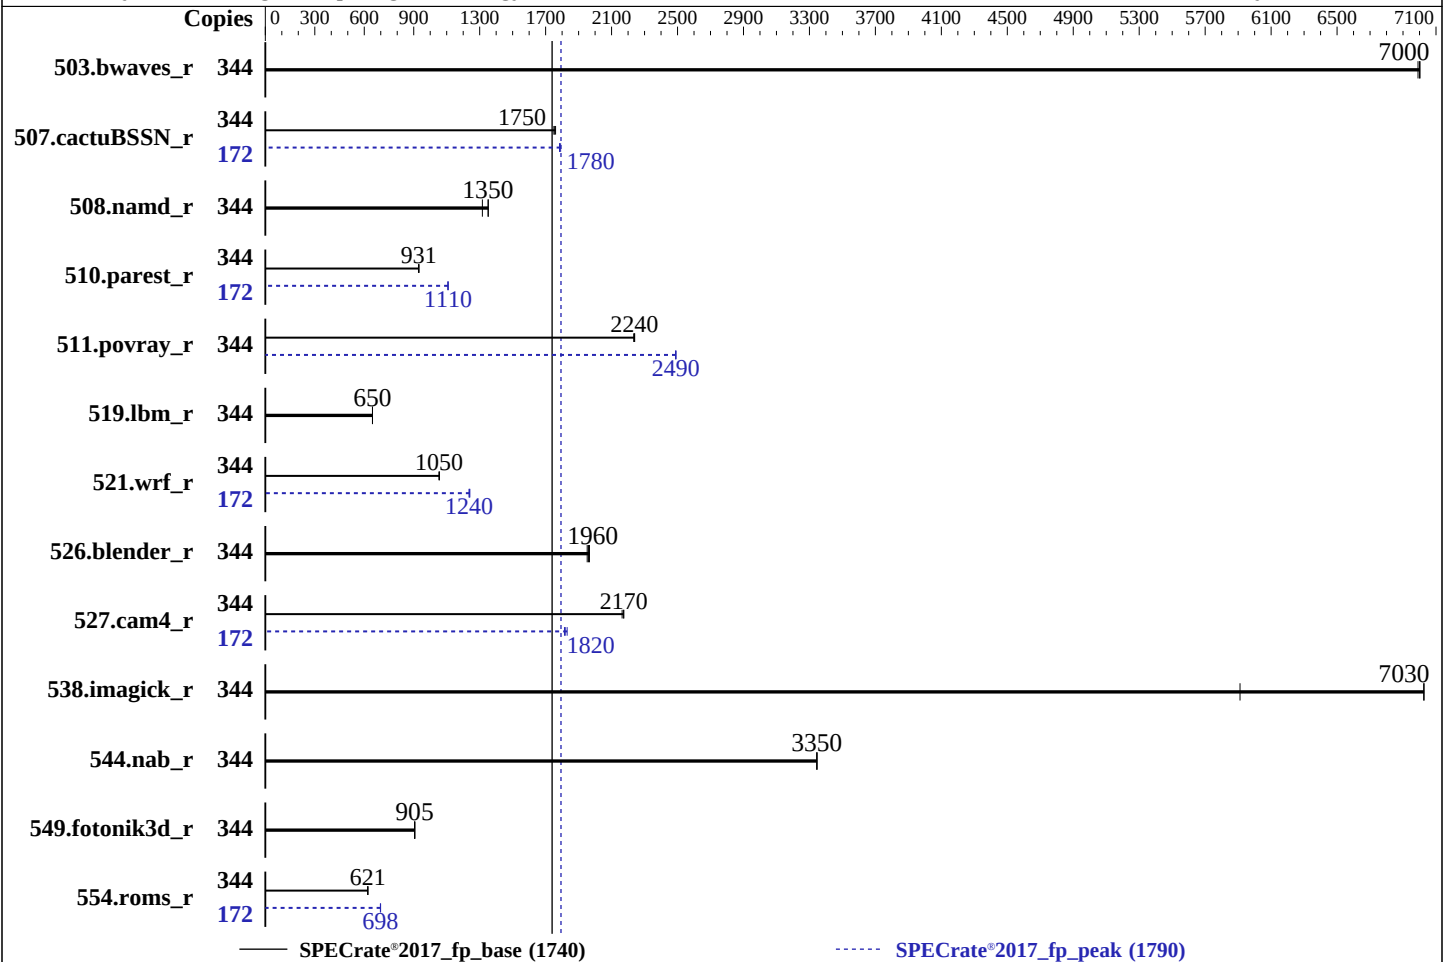

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1,2 chip(s)
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/56B-M, running at 8000)
Storage: 1 x 3.84TB SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version F23 released Mar-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	344	493	6990	493	7000	493	7000	344	493	6990	493	7000	493	7000
507.cactuBSSN_r	344	249	1750	247	1760	249	1750	172	122	1780	122	1780	122	1790
508.namd_r	344	248	1320	242	1350	242	1350	344	248	1320	242	1350	242	1350
510.parest_r	344	969	929	966	932	967	931	172	406	1110	406	1110	406	1110
511.povray_r	344	359	2240	359	2240	360	2230	344	323	2490	323	2490	323	2490
519.lbm_r	344	558	650	558	650	558	650	344	558	650	558	650	558	650
521.wrf_r	344	731	1050	731	1050	730	1060	172	312	1240	311	1240	312	1240
526.blender_r	344	268	1950	267	1970	267	1960	344	268	1950	267	1970	267	1960
527.cam4_r	344	278	2160	277	2170	277	2170	172	165	1820	166	1810	164	1830
538.imagick_r	344	122	7030	122	7030	145	5910	344	122	7030	122	7030	145	5910
544.nab_r	344	173	3350	173	3350	173	3340	344	173	3350	173	3350	173	3340
549.fotonik3d_r	344	1478	907	1480	905	1481	905	344	1478	907	1480	905	1481	905
554.roms_r	344	879	622	880	621	880	621	172	391	698	391	699	391	698

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Quick Setting set to Best Performance

Hyper-Performance set to Maximum

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Mar 14 16:04:35 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
16:04:35 up 22:29, 1 user, load average: 210.41, 307.83, 327.07
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Thu17 5:54m 1.14s 0.03s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 4125853
max locked memory	(kbytes, -l) 8192
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 4125853
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
ic2024.1-lin-core-avx512-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopeenv --note-preenv --logfile
$SPEC/tmp/CPU2017.062/templogs/preenv.fprate.062.0.log --lognum 062.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000380
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
physical id 1:  apicids 256-341,384-469
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	344
On-line CPU(s) list:	0-343
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6787P
BIOS Model name:	Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	86
Socket(s):	2
Stepping:	1
CPU(s) scaling MHz:	23%
CPU max MHz:	3800.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	8.1 MiB (172 instances)
L1i cache:	10.8 MiB (172 instances)
L2 cache:	344 MiB (172 instances)
L3 cache:	672 MiB (2 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-42,172-214
NUMA node1 CPU(s):	43-85,215-257
NUMA node2 CPU(s):	86-128,258-300
NUMA node3 CPU(s):	129-171,301-343
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Srbds:

Vulnerability Tsx async abort:

PBSRB-eIBRS Not affected; BHI BHI_DIS_S

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-42,172-214

node 0 size: 257538 MB

node 0 free: 209875 MB

node 1 cpus: 43-85,215-257

node 1 size: 257986 MB

node 1 free: 214142 MB

node 2 cpus: 86-128,258-300

node 2 size: 258025 MB

node 2 free: 213733 MB

node 3 cpus: 129-171,301-343

node 3 size: 257943 MB

node 3 free: 214090 MB

node distances:

node	0	1	2	3
0:	10	12	21	21
1:	12	10	21	21
2:	21	21	10	12
3:	21	21	12	10

9. /proc/meminfo

MemTotal: 1056250724 kB

10. who -r

run-level 3 Mar 13 17:36

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

kexec-load ksm kvm_stat lunmask man-db-create multipathd munge nfs nfs-blkmap nmb ntp-wait
ntpd openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion
serial-getty@ slurmd smartd_generate_opts smb snmpd snmptrapd speech-dispatcher svnserv
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
wpa_supplicant@ ypbind
pcscd saned@ systemd-userdbd wickedd

indirect

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=205c50d5-8622-4656-b281-2c13270d7dbe
splash=silent
resume=/dev/disk/by-uuid/66e6d88c-6f5e-41e0-a414-a0794a222fa2
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 26:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
-----------------------	-------

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   2.5T  306G  2.2T  13% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          Giga Computing
Product:         R284-S90-AAJ1-000
Product Family:  Server
Serial:          01234567890123456789AB
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M327R8GA0EB0-CLVXB 64 GB 2 rank 11200, configured at 8000
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      GIGABYTE
  BIOS Version:     F23
  BIOS Date:        03/13/2025
  BIOS Revision:    5.35
-----
```

Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

```
=====
C++        | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S90-AAJ1

(2.0 GHz, Intel Xeon 6787P)

SPECrate®2017_fp_base = 1740

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl, -z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flt0 -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-GNR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-GNR-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-14 04:04:35-0400.

Report generated on 2025-04-28 15:58:55 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.