



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

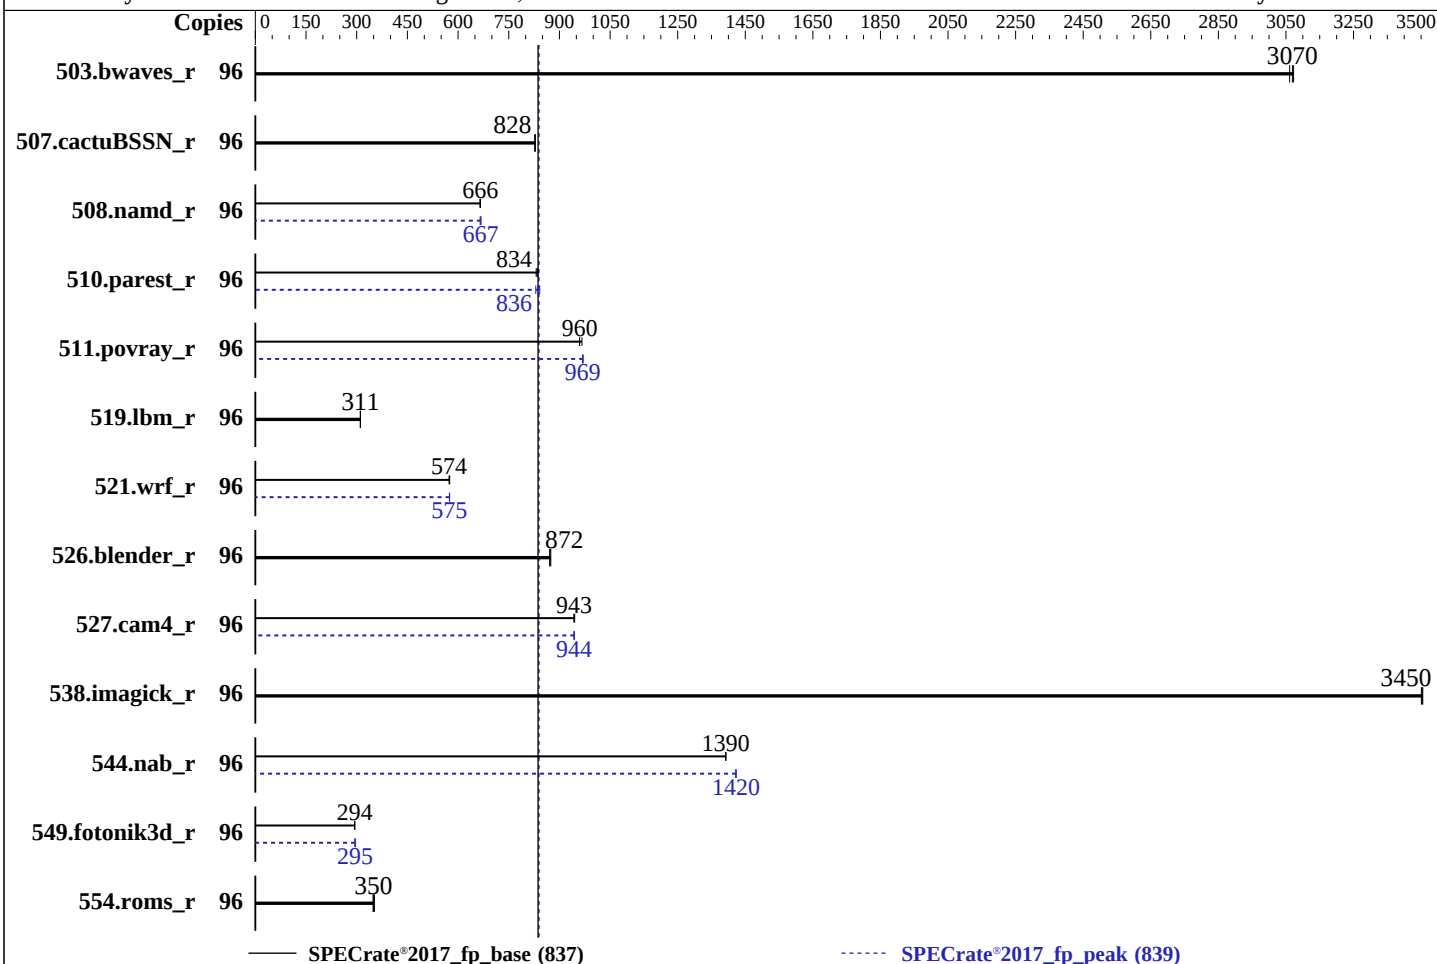

Hardware

CPU Name: AMD EPYC 9654
Max MHz: 3700
Nominal: 2400
Enabled: 96 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 3.84TB SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
kernel version 6.8.0-51-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 6.30.37 released Feb-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	314	3070	315	3060	313	3070	96	314	3070	315	3060	313	3070
507.cactuBSSN_r	96	147	827	147	828	147	829	96	147	827	147	828	147	829
508.namd_r	96	137	666	137	666	137	665	96	137	665	137	667	137	667
510.parest_r	96	301	834	302	831	300	836	96	303	830	298	842	301	836
511.povray_r	96	234	960	234	959	232	967	96	231	969	231	969	231	970
519.lbm_r	96	325	311	325	311	326	310	96	325	311	325	311	326	310
521.wrf_r	96	374	575	375	574	375	574	96	374	575	374	574	374	575
526.blender_r	96	168	872	167	874	168	871	96	168	872	167	874	168	871
527.cam4_r	96	178	943	178	945	178	943	96	178	944	178	944	178	943
538.imagick_r	96	69.1	3450	69.2	3450	69.1	3450	96	69.1	3450	69.2	3450	69.1	3450
544.nab_r	96	116	1390	116	1390	116	1390	96	114	1420	114	1420	114	1420
549.fotonik3d_r	96	1272	294	1273	294	1272	294	96	1267	295	1267	295	1267	295
554.roms_r	96	438	348	436	350	433	352	96	438	348	436	350	433	352

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Control set to Disabled

SVM Mode set to Disabled

Power Profile Selection set to High Performance Mode

Determinism Slider set to Power

cTDP set to 400

PPT set to 400

NUMA nodes per socket set to NPS 4

ACPI SRAT L3 cache as NUMA domain set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on h3c Thu Mar 20 04:08:33 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

1. uname -a
Linux h3c 6.8.0-51-generic #52-Ubuntu SMP PREEMPT_DYNAMIC Thu Dec 5 13:09:44 UTC 2024 x86_64 x86_64 x86_64
GNU/Linux
-----

2. w
 04:08:33 up 4 min,  1 user,  load average: 0.13, 0.27, 0.14
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1      -                04:08    9.00s  1.30s  0.12s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----

3. Username
From environment variable $USER:  root
-----

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1546054
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101154
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs
TLB size       : 3584 4K pages
cpu cores      : 96
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9654 96-Core Processor
BIOS Model name:       AMD EPYC 9654 96-Core Processor
BIOS CPU family:       107
CPU family:            25
Model:                 17
Thread(s) per core:    1
Core(s) per socket:    96
Socket(s):             1
Stepping:              1
Frequency boost:        enabled
CPU(s) scaling MHz:    46%
CPU max MHz:           3707.8120
CPU min MHz:           1500.0000
BogoMIPS:              4793.39
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
L1d cache: 3 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 12
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 72-79
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Vulnerable
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Vulnerable: __user pointer sanitization and usercopy barriers only;
no swapgs barriers
Vulnerability Spectre v2: Vulnerable; IBPB: disabled; STIBP: disabled; PBRSE-eIBRS: Not
affected; BHI: Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 12 nodes (0-11)

node 0 cpus: 0-7

node 0 size: 31890 MB

node 0 free: 31637 MB

node 1 cpus: 8-15

node 1 size: 32253 MB

node 1 free: 32078 MB

node 2 cpus: 16-23

node 2 size: 32253 MB

node 2 free: 32084 MB

node 3 cpus: 24-31

node 3 size: 32253 MB

node 3 free: 32023 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
node 4 cpus: 32-39
node 4 size: 32253 MB
node 4 free: 32083 MB
node 5 cpus: 40-47
node 5 size: 32253 MB
node 5 free: 32080 MB
node 6 cpus: 48-55
node 6 size: 32253 MB
node 6 free: 32102 MB
node 7 cpus: 56-63
node 7 size: 32253 MB
node 7 free: 32079 MB
node 8 cpus: 64-71
node 8 size: 32209 MB
node 8 free: 32049 MB
node 9 cpus: 72-79
node 9 size: 32253 MB
node 9 free: 32048 MB
node 10 cpus: 80-87
node 10 size: 32253 MB
node 10 free: 32077 MB
node 11 cpus: 88-95
node 11 size: 32205 MB
node 11 free: 32027 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
0: 10 11 11 12 12 12 12 12 12 12 12 12
1: 11 10 11 12 12 12 12 12 12 12 12 12
2: 11 11 10 12 12 12 12 12 12 12 12 12
3: 12 12 12 10 11 11 12 12 12 12 12 12
4: 12 12 12 11 10 11 12 12 12 12 12 12
5: 12 12 12 12 11 11 10 12 12 12 12 12
6: 12 12 12 12 12 12 10 11 11 12 12 12
7: 12 12 12 12 12 12 11 10 11 12 12 12
8: 12 12 12 12 12 12 11 11 10 12 12 12
9: 12 12 12 12 12 12 12 12 12 10 11 11
10: 12 12 12 12 12 12 12 12 12 11 10 11
11: 12 12 12 12 12 12 12 12 12 11 11 10
```

```
-----
9. /proc/meminfo
MemTotal:      395862492 kB
```

```
-----
10. who -r
run-level 3 Mar 20 04:05
```

```
-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
Default Target      Status
multi-user          running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi
open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

enabled-runtime disabled
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
indirect systemd-sysupdate systemd-sysupdate-reboot uuuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/vmlinuz-6.8.0-51-generic
root=UUID=5079c432-fd48-464d-92df-94ceb7591bc8
ro
iommu=pt
mitigations=off
security=none

14. cpupower frequency-info

analyzing CPU 79:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "schedutil" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2400MHz

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag [always] defer defer+madvise madvise never

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 ext4 3.4T 19G 3.2T 1% /

20. /sys/devices/virtual/dmi/id
Vendor: H3C
Product: RS33M2C9S
Product Family: Rack
Serial: N/A

21. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.30.37
BIOS Date: 02/28/2025
BIOS Revision: 5.27

Compiler Version Notes

=====

C		519.lbm_r(base, peak)	538.imagick_r(base, peak)	544.nab_r(base, peak)
---	--	-----------------------	---------------------------	-----------------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

510.parest_r: -m64 -std=c++14 -flto -Wl, -mllvm -Wl, -suppress-fmas

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

527.cam4_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14

```
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false  
-Wl, -mllvm -Wl, -extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm  
-lamdalloc -ldl
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 837

SPECrate®2017_fp_peak = 839

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-20 00:08:32-0400.

Report generated on 2025-04-09 14:56:24 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.