SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_int_base = 2040

SPECrate®2017_int_peak = 2100

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

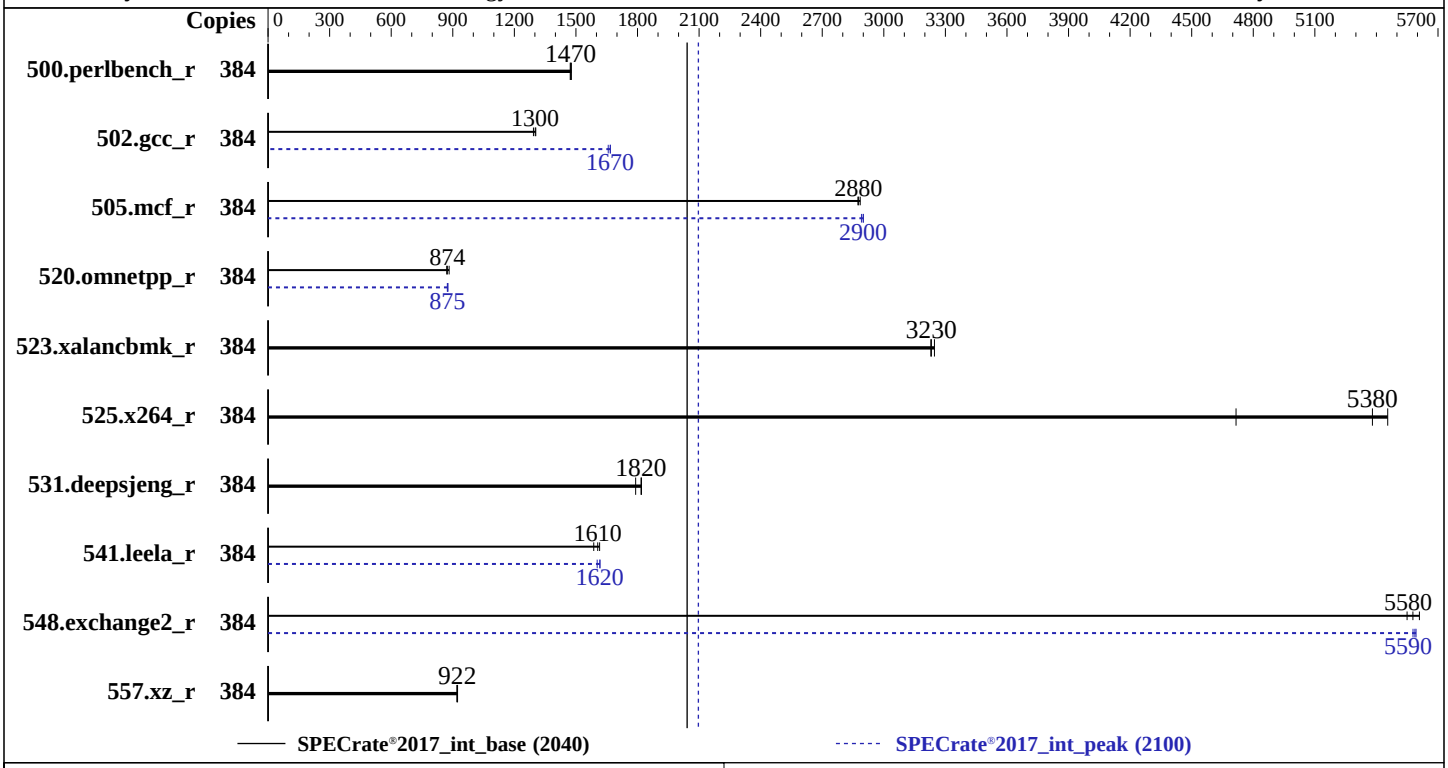

Hardware

CPU Name:	AMD EPYC 9645
Max MHz:	3700
Nominal:	2300
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 12 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
Storage:	1 x 1.92 TB M.2 NVME SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Lenovo BIOS Version QGE133I 7.20 released Feb-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.30 GHz, AMD EPYC 9645)

SPECrate®2017_int_base = 2040

SPECrate®2017_int_peak = 2100

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	415	1470	414	1480	**415**	**1470**	384	415	1470	414	1480	**415**	**1470**
502.gcc_r	384	**418**	**1300**	417	1300	421	1290	384	**326**	**1670**	326	1670	328	1660
505.mcf_r	384	**216**	**2880**	216	2870	215	2890	384	214	2900	**214**	**2900**	215	2890
520.omnetpp_r	384	579	870	571	882	**577**	**874**	384	577	873	**576**	**875**	575	876
523.xalancbmk_r	384	**125**	**3230**	126	3230	125	3250	384	**125**	**3230**	126	3230	125	3250
525.x264_r	384	143	4720	**125**	**5380**	123	5460	384	143	4720	**125**	**5380**	123	5460
531.deepsjeng_r	384	246	1790	**242**	**1820**	242	1820	384	246	1790	**242**	**1820**	242	1820
541.leela_r	384	401	1590	394	1620	**396**	**1610**	384	393	1620	397	1600	**393**	**1620**
548.exchange2_r	384	181	5550	179	5610	**180**	**5580**	384	180	5580	**180**	**5590**	180	5590
557.xz_r	384	449	923	**450**	**922**	451	920	384	449	923	**450**	**922**	451	920

SPECrate®2017_int_base = 2040

SPECrate®2017_int_peak = 2100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
     -aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
P-State set to Enabled
NUMA Nodes per Socket set to NPS4
ACPI SRAT L3 Cache as NUMA Domain set to Enabled

 Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sat Mar 22 03:56:27 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:56:27 up  5:26,  1 user,  load average: 83.33, 280.84, 343.14
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093337
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3093337
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 /bin/bash ./Run025-compliant-amd-rateint.sh
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.484/templogs/preenv.intrate.484.0.log --lognum 484.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9645 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101025
```

(Continued on next page)

Platform Notes (Continued)

```
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 96
     siblings        : 192
     2 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
     physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
     physical id 0: apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
     physical id 1: apicids 256-279,288-311,320-343,352-375,384-407,416-439,448-471,480-503
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9645 96-Core Processor
   BIOS Model name:                      AMD EPYC 9645 96-Core Processor                 Unknown CPU @ 2.3GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            2
   Stepping:                             0
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   101%
   CPU max MHz:                          2300.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4593.18
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                         nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                         pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                         avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                         flush_l1d debug_swap
   Virtualization:                       AMD-V
```

(Continued on next page)

Platform Notes (Continued)

```
  L1d cache:                            9 MiB (192 instances)
  L1i cache:                            6 MiB (192 instances)
  L2 cache:                             192 MiB (192 instances)
  L3 cache:                             512 MiB (16 instances)
  NUMA node(s):                         16
  NUMA node0 CPU(s):                    0-11,192-203
  NUMA node1 CPU(s):                    12-23,204-215
  NUMA node2 CPU(s):                    24-35,216-227
  NUMA node3 CPU(s):                    36-47,228-239
  NUMA node4 CPU(s):                    48-59,240-251
  NUMA node5 CPU(s):                    60-71,252-263
  NUMA node6 CPU(s):                    72-83,264-275
  NUMA node7 CPU(s):                    84-95,276-287
  NUMA node8 CPU(s):                    96-107,288-299
  NUMA node9 CPU(s):                    108-119,300-311
  NUMA node10 CPU(s):                   120-131,312-323
  NUMA node11 CPU(s):                   132-143,324-335
  NUMA node12 CPU(s):                   144-155,336-347
  NUMA node13 CPU(s):                   156-167,348-359
  NUMA node14 CPU(s):                   168-179,360-371
  NUMA node15 CPU(s):                   180-191,372-383
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     512M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-11,192-203
  node 0 size: 47890 MB
  node 0 free: 46765 MB
  node 1 cpus: 12-23,204-215
  node 1 size: 48377 MB
  node 1 free: 47338 MB
  node 2 cpus: 24-35,216-227
  node 2 size: 48377 MB
  node 2 free: 47369 MB
  node 3 cpus: 36-47,228-239
  node 3 size: 48377 MB
  node 3 free: 47352 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 4 cpus: 48-59,240-251
  node 4 size: 48339 MB
  node 4 free: 47328 MB
  node 5 cpus: 60-71,252-263
  node 5 size: 48377 MB
  node 5 free: 47363 MB
  node 6 cpus: 72-83,264-275
  node 6 size: 48377 MB
  node 6 free: 47357 MB
  node 7 cpus: 84-95,276-287
  node 7 size: 48377 MB
  node 7 free: 47330 MB
  node 8 cpus: 96-107,288-299
  node 8 size: 48377 MB
  node 8 free: 47366 MB
  node 9 cpus: 108-119,300-311
  node 9 size: 48377 MB
  node 9 free: 47374 MB
  node 10 cpus: 120-131,312-323
  node 10 size: 48377 MB
  node 10 free: 47364 MB
  node 11 cpus: 132-143,324-335
  node 11 size: 48377 MB
  node 11 free: 47378 MB
  node 12 cpus: 144-155,336-347
  node 12 size: 48377 MB
  node 12 free: 47388 MB
  node 13 cpus: 156-167,348-359
  node 13 size: 48377 MB
  node 13 free: 47378 MB
  node 14 cpus: 168-179,360-371
  node 14 size: 48377 MB
  node 14 free: 47384 MB
  node 15 cpus: 180-191,372-383
  node 15 size: 48222 MB
  node 15 free: 47240 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
    1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
    2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
    3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
    4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
    5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
    6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
    7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
    8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
    9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
   10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
   11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
   12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
   13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
   14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
   15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791921500 kB

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
10. who -r
  run-level 3 Mar 21 22:30

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd
  generated        ntp_sync
  indirect         systemd-userdbd uuidd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 220:
    current policy: frequency should be within 1.50 GHz and 2.30 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   1.8T   95G  1.7T   6% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SR675 V3 System Board
    Product Family: ThinkSystem
    Serial:          None

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 6000
    2x SK Hynix HMCG88AHBRA472N 32 GB 2 rank 6400, configured at 6000
    10x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 6000


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      QGE133I-7.20
   BIOS Date:         02/05/2025
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     7.20
    Firmware Revision: 9.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `basepeak = yes`

502.gcc_r: `-m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner -z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -fgnu89-inline -lamdalloc`

505.mcf_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang -lamdalloc-ext -ldl`

525.x264_r: `basepeak = yes`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3`

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-21 15:56:26-0400.
Report generated on 2025-04-09 14:59:18 by CPU2017 PS formatter v6716.
Originally published on 2025-04-09.